

UL20617

File No. : E214500



www.dgwenchang.com

Product Description:

- Tinned, annealed, stranded or solid copper conductor.
- TPE insulation
- Tinned or bare copper wire spiral or braid shield
- Rated temperature:105°C.Rated voltage:300Volts
- Passes UL VW-1&CUL FT1 vertical flame test

说明:

- 导体使用单股或绞线裸铜或镀锡铜。
- TPE被覆
- 裸铜或镀锡铜丝，缠绕或编织屏蔽
- 额定温度：105℃额定电压：300Volts
- 可通过UL VW-1 及 CUL FT1 ，垂直燃烧测试

Applications:

- Pipe Heating Cable where the acceptability of the combination is to be determined by


Underwriters Laboratories Inc.

应用:

- 发热电缆相结合的可接受性是由保险商实验室公司决定

Construction:

构造:

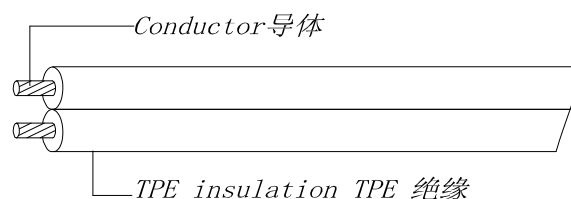

UL Style& CUL Type	Core qty	Conductor		Thickness	Over Diameter	Packing	Conductor Resistance at 20°C
		AWG	No/Φmm	mm	mm	1KFT/Coil	Ω /KM
UL20617 CUL (Stranded)	2C	18	34/0.178	1.524	4.3*8.6	1KFT	23.20
		16	26/0.25	1.524	4.6*9.2	1KFT	14.60