


EPIC-N52 VER1.0

Front



IO Front View

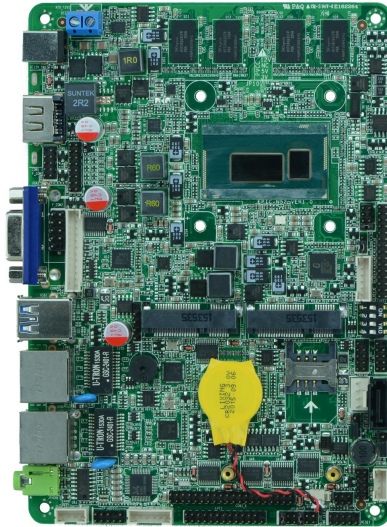

IO Side View



Model. NO.:	EPIC-N52 VER:1.0
CPU	Support Intel®Haswell-U,Broadwell-U Processor, TDP15W
Graphic	NC
Memory	Onboarded DDR3L 2GB or 4GB 1333MHz Memory Particle
Dispay	Integrated Intel®HD Graphics
	Support 1*VGA,1*HDMI,1*LVDS(Support Dual channel 24BIT)
	Support VGA;HDMI;LVDS
LAN	2* RTL8111E Gigabit Ethernet controller,Support Wake-on-LAN/PXE
Storage	1* MINISATAn port (Support SSD)
	1* SATA port
Audio	Integrated ALC662 6-Channel audio controller,Support MIC/Line-out / amplifier
	Advise 2Ω5W speaker
Expansion Slot	1* Mini-PCIE Support WIFI/3G
	1* MSATA Support SSD/WIFI,SSD Transfer rate Up to 6Gbps
Rear I/O	2* USB3.0
	1* HDMI(DB9 COM)
	1* VGA(DB9 COM)
	2* RJ-45(LAN2 could choose to be 2*USB2.0)
	1* Line out(Green)
	1* Mic (Red)
	1* 12V DC_JACK input
Internal I/O	1* LVDS(2*15pin),support dual channel 24 BIT LCD display
	1* LVDS INVERTER(1*6pin)
	1* JVGA1(2*12pin) same signal with DB15
	6* RS232,COM1 The 9th pin charged function,COM3 SupportRS485/RS422
	4* USB2.0 port(2*5pin)
	1* PS/2 KB/MS connector (1*6Pin)
	1* AUDIO front panel audio connector (2*5pin)
	1* SIM card socket
	1* PWROUT HDD power port
	1* AUDIO front panel audio connector (2*5pin)
	1* 4pin ATX 12V
Fan	1* CPUFAN connector 4pin
GPIO	1* GPIO (Support 4-way GPIO function)
BIOS	AMI 64Mb Flash ROM

Watchdog	Support hardware reset function (L256, 0~255 seconds)
Power input	DC_12V single power supply
Operating Temperature.	-10℃～60℃
Storage Temperature.	-20℃～70℃
Humidity	5%-95% (relative humidity; non-condensing)
Dimension	165mm x 115mm

Order information:

No	Model No.	CPU	Memory	Display	LVDS	LAN	USB	COM	RS485/422	Power
1	EPIC-N52 VER:1.0	2980U/1.60G	1*SOD DR3	1*VGA	2*24BIT	2*RTL8111F	6	6	COM3	DC/12V