
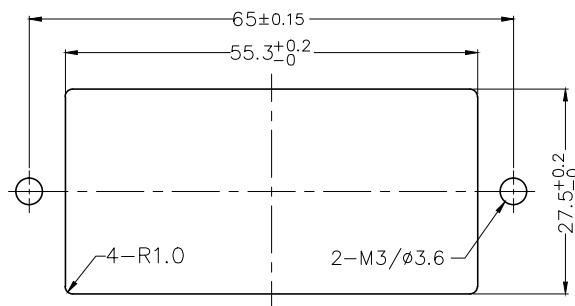
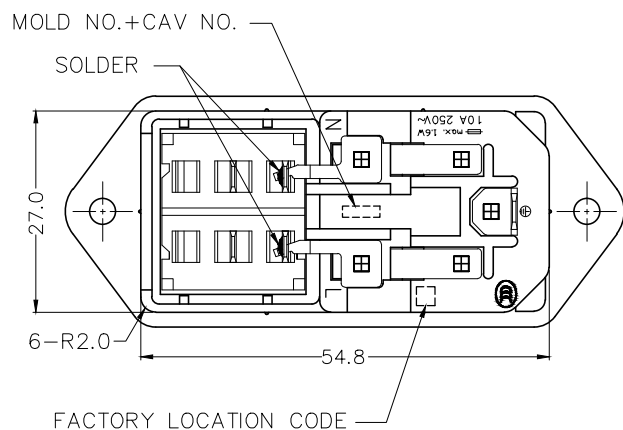
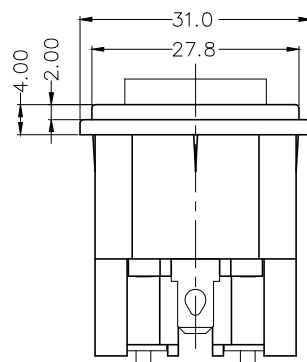
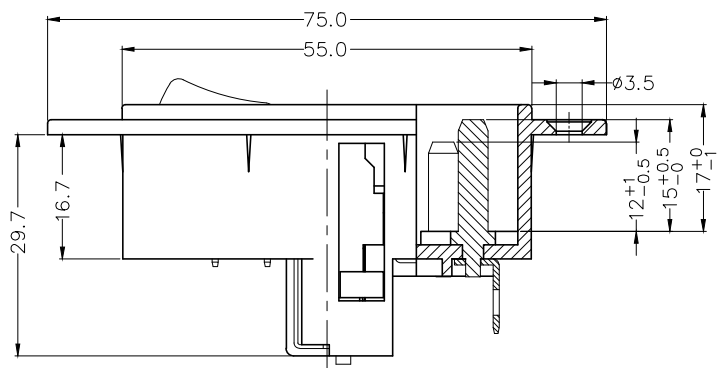


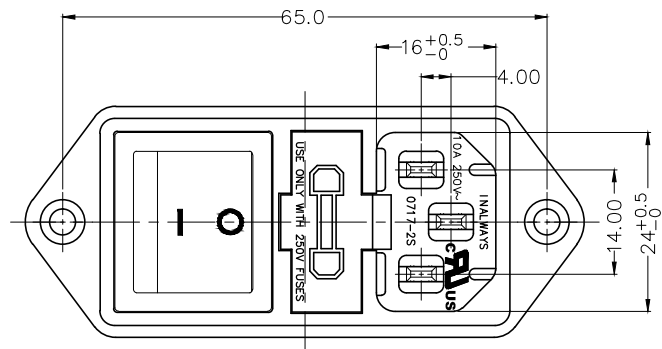

PANEL CUT-OUT

SPECIFICATION

A: MATERIAL:

1. HOUSING: PC, UL 94V-0
2. TERMINAL: COPPER ALLOY, TIN PLATED


B: CHARACTERISTICS:

1. RATING: 10A 250V~ NORTH AMERICA & EUROPE
2. INSULATION RESISTANCE: 100 MΩ MIN, AT 500 V DC
3. ELECTRIC STRENGTH: AC 2,000 V FOR 1 MINUTE

C: APPROVALS:

UL, CUL, TUV, & CCC

D: DIAGRAM:

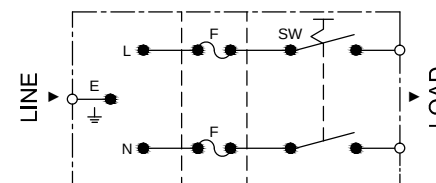

E: ORDERING INFORMATION:

P/N	SOCKET'S TERMINAL	SWITCH'S TERMINAL
0717-2SCQ00-H01-CBK	 ø2.8x3.45L 10 4.8 1.5	 8.0 4.8 1.5

REV	DATE	DOCUMENT	DESCRIPTION
A	2023.05.18	RELEASE	NEW REVISION

深圳易凯达科技有限公司				PART NO.: 0717-2SCQ00-H01-CBK		NAME: AC INLET 3P + SWITCH & 2 FUSE (SCREW-ON)	
TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: ANGLAR: .000: ±0.1 .00 : ±0.2 .0 : ±0.3				MATERIAL: SEE ABOVE		SPEC.: IEC 60320-1, C14 IEC 60127-6	
				APPROVED	CHECKED	DESIGNER	NOTE:
A 4			UNIT mm	SCALE 1 : 1	SHEET 1 of 1	研发部 2023.05.18 兰锐	
						研发部 2023.05.18 兰锐	
						DOC.#: S717-00XX	