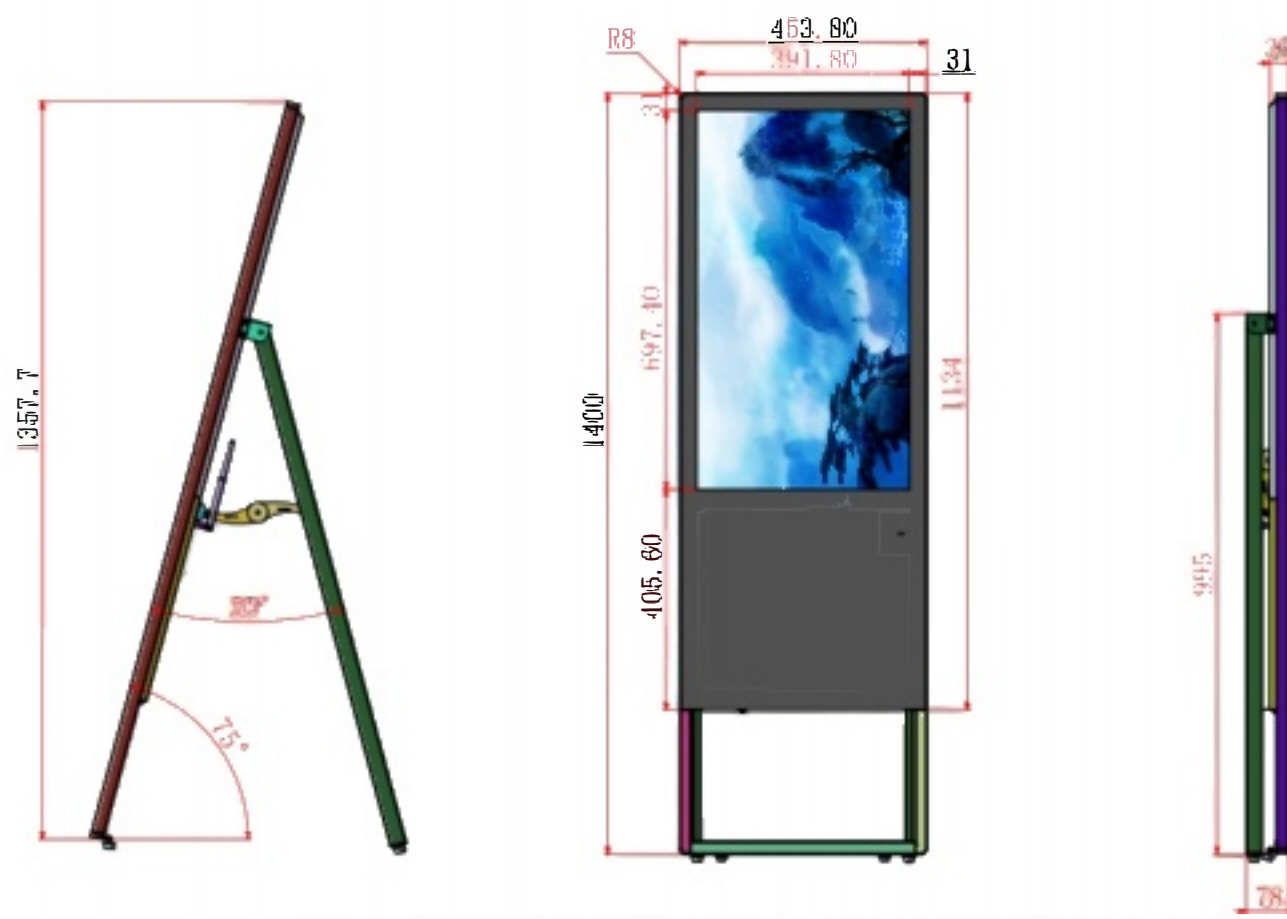


**Product specification parameter list**


<b>Panel</b>	brand	BOE	Model Name	HV320FHB-N02
	screen size	32.00"	Screen type	Liquid crystal glass, a-Si TFT-LCD
	Resolution	1920(RGB)×1080(FHD)69PPI	Pixel configuration	RGB vertical bar
	Display size	698.4 × 392.85 mm (H×V)	physical dimension	7084×4054×1.36mm (H×VxD)
	Visual size	-	Surface treatment	Matte surface (Haze 1%), Hard coating (3H)
	Brightness (cd/m <sup>2</sup> )	0	Contrast	1200:1 (Typ.) [Transmission]
	Best angle	Full view	Optical mode	ADSDS, normally black display, transmissive
	Viewing angle	89/89/89/89 (Typ.)(CR≥10)	Responsiveness	8 (Typ.) (G to G) ms
	glass thickness	0.50+0.50 mm	Transmittance	5.0% (Typ.) (including polarizer)
	Number of colors	16.7M , 72% NTSC	Backlight type	No backlight
	Screen weight	850g (Typ.)	signal system	LVDS (2 ch, 8-bit), connector, 51 pins
	Refresh rate	60Hz	Supply voltage	12.0V (Typ.)
	Driver IC	Bonded COF 6 source chips	Maximum rating	Storage temperature: -20 ~ 60 °C Working temperature: 0 ~ 60 °C
	<b>Parameter</b>	Display Resolution	1920*1080	
Contrast		1400:1typ		
Maximum Brightness		350cd/m <sup>2</sup>		
Image Ratio		16:9		
Visual Angle		178°		
Color		16.7M		
Input Voltage		AC110-240V (50Hz-60Hz)		
<b>Play system</b>	Motherboard	RK3566		
	CPU	RK3566, quad-core, up to 1.8GHz		
	system	11.0 Android system		
	ROM	ROM:16GB		
	RAM	RAM: 2GB		
	Play mode	Support multiple playback modes such as looping, timing, interstitial, etc.		
	Decoding resolution	Support up to 3840*2160		
	Split screen playback	Support horizontal screen, vertical screen, full screen and split screen playback		
	Time switch play	5 switches per day, seven days a week can be set up, 24 hours unmanned management		
	Audio/Sound	Left channel, right channel, 8Ω5W speaker		
	Support subtitles	You can set mobile subtitles, and play subtitles in commercials		
	Image Format	Support JPG, BMP, PNG, GIF and other image format browsing and support rotation/slide show, up to 4096*4096 resolution		
	Play file format	Video: All video formats Music: MP3 style music		
	Network Interface	RJ45/IEEE802.31/100M ETHERNET LAN; WIFI		
	Network support	3G <sup>+</sup> Ethernet, support WiFi/Bluetooth 4.0, wireless peripheral expansion		
	Log management	Support terminal log and program log management		
	TF card	Support TF card		
	Ethernet	10M/100M/1000M adaptive Ethernet		
Switch machine	Manual switch machine, automatic timing switch machine.			
Background operation software	LAN/Internet, B/S management software			
Language	Simplified Chinese, Traditional Chinese, English and other languages			
GPS	External GPS (optional)			
<b>Shell</b>	Material	The body adopts 1.5mm advanced metal sheet metal and full tempered glass		
	Frame	Al aluminum with high hardness, colors: silver, black, white (customized, other colors can also be customized)		
	Spray paint	Metal baking paint (color can be sprayed as needed)		
<b>Shipment</b>	annex	wifi antenna, power cord		
	package	Foam and carton packaging		
<b>Warranty</b>	(1) One year warranty for the whole machine During the warranty period, quality problems caused by normal use, such as color difference, touch failure, etc. (Does not include man-made damage) (2) Charged warranty For quality problems arising from abnormal use, maintenance fees will be charged depending on the degree of damage. (3) Special Instructions—Man-made damage cannot be warranty. Liquid crystal is a glass product. If it is dropped from a high place or hit hard, it may cause the screen to burst and the broken lens cannot be reshaped.			