


Digital Optical 2 Way Audio Splitter

Quick Installation Guide Ver. 1.0

All brand names and trademarks are properties of their respective owners


1

FRONT PANEL



TOSLink(Optical Fiber) Output Ports A and B: Connect the TOSLink output ports to the TOSLink input port of audio equipments such as audio amplifier and AV receiver.

REAR PANEL



TOSLink(Optical Fiber) Input Port: Connect the TOSLink input port to the TOSLink output port of audio equipment such as audio amplifier, AV receiver or DVD player.

3

INTRODUCTION:

Digital Optical 2 Way Audio Splitter is designed for the audio signal distribution from one digital optical input to two outputs, using TOSLink(Optical Fiber) cables. The Optical Fiber cables connected to both ends of the unit can run up to 5 meters while still provide reliable and lossless audio signal transmission. The product is compact and easy to install, and that makes it a very handy gadget recommended for either home or professional audio distribution.


FEATURES:

- Supports S/PDIF standard of digital audio transmission.
- Supports uncompressed 2-channel LPCM (Linear Pulse Code Modulation) audio signal.
- Supports compressed 2-channel and DTS audio signal.
- Provides electromagnetic-noise-free transmission.
- Easy to install and to operate.

OPERATION CONTROLS AND FUNCTIONS:

2

CONNECTION AND INSTALLATION:

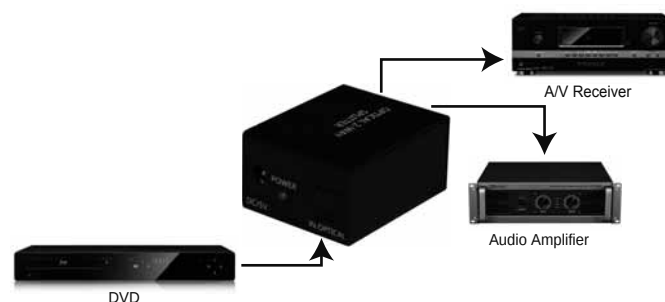

SPECIFICATIONS:

Input Port	1×TOSLink(Optical Fiber)
Output Ports	2×TOSLink(Optical Fiber)
Power Supply	5V/1A DC
Dimensions(mm)	50(L)×41(W)×21(H)
Chassis Material	Metals
Silkscreen Color	White
Operating Temperature	0 ~40

4