



浙江恒久集团·江西恒久链传动有限公司
HENJU GROUP · JIANG XI HENJU CHAIN TRANSMISSION CO.,LTD.

TRANSMISSION ROLLER CHAIN


传动链

传动用滚子链以其高强度和持久耐疲劳著称，尺寸完全遵循ANSI和BS标准，可组装成单排、双排和多排，以适用所传动的功率和不同的配置空间。根据不同的工作环境，可供选择经镀锌、镀镍、镀铬、达克罗等不同表面涂层处理的链条。

Transmission Roller Chain is famous for its high strength and continuous antifatigue; the chain dimensions fully meet the standards of ANSI and BS, and it can be assembled into single strand, double strands and multiple strands for applying for driven power and different allowed space. According to varied working conditions, it may choose the chain with different coating treatment, such as zinc plating, nickel plating, chrome plating and dacromet plating etc.

TRANSMISSION CHAIN 传动链

Short Pitch Precision Roller Chain(B Series)
B系列短节距精密滚子链

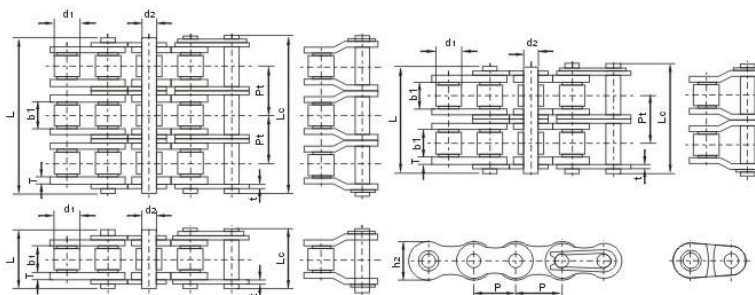

DIN/ISO Chain No.	Pitch		d ₁ max mm	b ₁ min mm	d ₂ max mm	t/T mm	h ₂ max mm	Pt mm	L max mm	Lc max mm	U.T.S KN	A.T.S KN	q kg/m
	mm	inch											
04B-1	6.00		4.00	2.80	1.85	0.80	5.00	-	7.40	10.30	3.00	3.80	0.12
05B-2	8.00		5.00	3.00	2.31	0.80	7.10	5.84	13.80	14.90	6.50	8.00	0.19
06B-1								-	13.15	13.50	9.00	10.80	0.38
06B-2	9.525	3/8"	6.35	5.72	3.28	1.30	8.26	10.24	23.40	23.80	16.90	20.28	0.74
06B-3								10.24	33.60	34.00	24.90	29.88	1.10
08B-1								-	16.85	18.20	18.00	21.80	0.74
08B-2	12.70	1/2"	8.51	7.75	4.45	1.60	11.80	13.92	30.70	32.20	31.10	37.32	1.47
08B-3								13.92	44.60	46.00	46.65	55.98	2.20
10B-1								-	19.50	20.50	22.40	26.88	0.95
10B-2	15.875	5/8"	10.16	9.65	5.08	1.70	14.60	16.59	38.00	37.20	44.50	53.40	1.98
10B-3								16.59	52.80	53.80	60.70	80.04	2.81
12B-1								-	22.45	23.40	29.00	34.80	1.23
12B-2	19.05	3/4"	12.07	11.88	5.72	1.85	16.10	19.46	42.10	42.90	57.80	69.36	2.42
12B-3								19.46	61.60	62.30	68.70	104.04	3.61
16B-1								-	35.50	36.70	60.00	72.00	2.77
16B-2	25.40	1"	15.88	17.02	8.28	3.24	21.00	31.88	88.50	89.60	108.00	127.20	5.51
16B-3								31.88	99.50	100.50	160.00	192.00	8.25
18B-1								-	41.40	44.00	95.00	114.00	3.90
20B-2	31.75	1 1/4"	19.05	19.56	10.19	4.50	26.40	36.45	114.00	119.50	250.00	300.00	11.44
20B-3								36.45	148.80		325.00	390.00	15.18
24B-1								-	53.50	57.70	160.00	192.00	7.14
24B-2	38.10	1 1/2"	25.40	25.40	14.63	6.00	33.40	48.36	101.80	106.10	280.00	336.00	14.10
24B-3								48.36	150.20	154.40	425.00	510.00	20.79
28B-1								-	65.10	69.00	200.00	240.00	9.36
28B-2	44.45	1 3/4"	27.94	30.99	15.90	7.60	37.00	59.56	123.15	128.60	390.00	432.00	18.52
28B-3								59.56	183.70	188.20	530.00	636.00	27.70
32B-1								-	84.50	70.00	250.00	300.00	9.84
32B-2	50.80	2"	29.21	30.99	17.81	7.10	42.20	68.55	124.10	128.50	450.00	540.00	19.80
32B-3								68.55	181.80	187.10	670.00	804.00	29.26
40B-1								-	80.00	84.30	355.00	426.00	16.40
40B-2	63.50	2 1/2"	39.37	38.10	22.89	8.60	52.90	72.29	151.60	156.60	630.00	756.00	32.00
40B-3								72.29	224.60	228.90	850.00	1140.00	48.30
48B-1								-	99.00	105.00	590.00	672.00	25.20
48B-2	76.20	3"	48.26	45.72	29.24	10.00	63.88	91.21	191.20	196.20	1000.00	1200.00	50.00
48B-3								91.21	276.10	287.40	1500.00	1800.00	74.80
56B-1								-	116.50	122.00	850.00	1020.00	35.00
56B-2	88.90	3 1/2"	53.98	53.34	34.32	12.40	77.50	106.60	223.10	228.60	1600.00	1920.00	86.30
56B-3								106.60	329.70	335.20	2240.00	2688.00	103.60
64B-1								-	131.30	137.30	1120.00	1344.00	59.50
64B-2	101.60	4"	63.50	60.96	39.40	13.50	90.00	119.89	251.20	257.20	2000.00	2400.00	118.50
64B-3								119.89	371.10	377.10	3000.00	3600.00	177.50
72B-1								-	148.20	154.20	1400.00	1680.00	80.90
72B-2	114.30	4 1/2"	72.30	68.58	44.48	16.00	103.50	136.27	284.50	290.50	2500.00	3000.00	155.90
72B-3								136.27	420.70	426.70	3750.00	4500.00	238.00

U.T.S=Ultimate tensile strength 破断载荷

A.T.S=Average Tensile Strength 平均拉伸载荷


*本目录中的所有图片及版面均由恒久公司出资拍摄和设计，并保留相关权利，任何公司未经恒久公司书面授权，不得转载。

Copyright Reserved By KETOZ



浙江恒久集团·江西恒久链传动有限公司
HENJU GROUP · JIANG XI HENJU CHAIN TRANSMISSION CO.,LTD.

Short Pitch Precision Roller Chain(A Series) A系列短节距精密滚子链

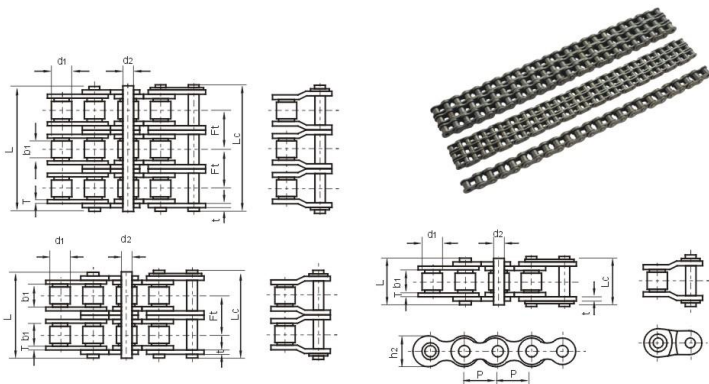

ANSI Chain No.	ISO GB/T 1243号	Pitch		d1 max mm	b1 min mm	d2 max mm	t/T mm	h2 max mm	Pt mm	L max mm	Lc max mm	U.T.S KN	A.T.S KN	q kg/m
		mm	inch											
25-1	04C-1	6.35	1/4"	3.30	3.10	2.31	0.80	6.00	6.40	7.95	8.70	3.50	4.20	0.15
25-2	04C-2									14.40	15.15	7.00	8.40	0.28
35-1	06C-1	9.525	3/8"	5.08	4.77	3.58	1.30	8.70	10.13	12.30	13.30	7.80	9.36	0.35
35-2	06C-2									22.40	23.40	15.60	18.72	0.69
35-3	06C-3									32.50	33.50	23.40	28.08	1.02
081		12.70	1/2"	7.75	3.30	3.66	1.00	9.91		10.20	11.70	8.20	9.84	0.29
082					2.38	3.66	-	9.91		8.20	-	10.00	12.00	0.27
083					4.88	4.09	1.27	10.30		12.90	14.40	12.00	14.40	0.43
084					4.88	4.09	1.80	11.15		14.80	16.30	16.00	19.20	0.60
085		12.70	1/2"	7.77	6.25	3.58	-	9.91		14.00	16.00	6.80	8.16	0.39
41-1	085				6.38	3.58	1.20	9.60	14.38	13.60	14.70	6.70	8.04	0.41
40-1	08A-1	12.70	1/2"	7.92	7.85	3.97	1.50	12.00	14.38	16.40	17.80	13.80	16.56	0.66
40-2	08A-2									30.80	32.30	27.60	33.12	1.30
40-3	08A-3	15.875	5/8"	10.16	9.40	5.08	2.03	15.05	18.11	45.00	46.70	41.40	49.68	1.96
50-1	10A-1									20.50	21.80	21.80	26.16	1.10
50-2	10A-2	19.05	3/4"	11.91	12.57	5.94	2.42	18.00	22.78	38.20	40.00	43.60	52.32	2.14
50-3	10A-3									56.50	58.10	65.40	78.48	3.20
60-4	12A-4	19.05	3/4"	11.91	12.57	5.94	2.42	18.00	22.78	74.50	76.10	87.20	104.64	4.35
60-1	12A-1									25.48	26.70	31.10	37.32	1.53
60-2	12A-2	19.05	3/4"	11.91	12.57	5.94	2.42	18.00	22.78	48.40	49.50	62.30	74.76	3.00
60-3	12A-3									71.30	73.10	93.40	112.08	4.50
60-4	12A-4	19.05	3/4"	11.91	12.57	5.94	2.42	18.00	22.78	93.80	96.00	124.40	149.28	5.97
60-5	12A-5									116.60	119.00	154.00	184.80	7.44
60-6	12A-6	19.05	3/4"	11.91	12.57	5.94	2.42	18.00	22.78	139.40	142.60	177.10	212.52	8.91

U.T.S=Ultimate tensile strength 破断载荷

A.T.S=Average Tensile Strength 平均拉伸载荷

*本目录中的所有图片及版面均由恒久公司出资拍摄和设计，并保留相关菲林，任何公司未经恒久公司书面授权，不得转载。

Copyright Reserved By KETOZ

TRANSMISSION CHAIN 传动链

Straight Side Plate Chain(A Series) A系列短节距直板滚子链

ANSI Chain No	ISO GB/T 1243号	Pitch		d1 max mm	b1 min mm	d2 max mm	t/T mm	h2 max mm	Pt mm	L max mm	Lc max mm	U.T.S KN	A.T.S KN	q kg/m
		mm	inch											
80-1	16A	25.40	1"	15.88	15.75	7.94	3.23	23.50	29.29	32.70	34.10	55.60	66.72	2.63
80-2										61.80	63.40	111.20	133.44	5.24
80-3										91.20	94.20	166.80	200.16	7.93
80-4										120.80	123.50	222.40	266.88	10.42
80-5										150.10	153.00	275.80	330.96	13.01
80-6										179.40	182.50	317.00	380.40	15.60
100-1	20A	31.75	1 1/4"	19.05	18.90	9.53	4.00	30.00	35.76	40.00	43.10	86.70	104.04	4.03
100-2										75.80	78.90	173.50	208.20	8.02
100-3										110.00	115.30	260.20	312.24	12.00
100-4										147.40	151.10	346.80	416.16	15.98
100-5										183.20	187.00	430.00	516.00	19.96
100-6										219.00	223.00	502.80	603.36	23.94
120-1	24A	38.10	1 1/2"	22.23	25.22	11.10	4.80	36.20	45.44	50.50	54.00	124.60	149.52	5.94
120-2										95.94	99.40	249.10	298.82	11.84
120-3										141.40	144.90	373.70	448.44	17.69
120-4										186.20	189.50	488.40	598.08	23.54
120-5										232.30	235.80	618.00	741.60	29.39
120-6										277.70	281.20	722.70	867.24	35.24
140-1	28A	44.45	1 3/4"	25.40	25.22	12.70	5.60	42.00	48.87	53.50	57.80	169.00	202.80	7.50
140-2										102.50	106.70	338.10	405.72	14.89
140-3										151.50	155.80	507.10	608.52	22.28
140-4										200.40	204.70	676.00	811.20	29.67
140-5										249.30	253.50	838.20	1005.84	37.06
140-6										298.10	302.40	980.20	1176.24	44.45
160-1	32A	50.80	2"	28.58	31.55	14.27	6.50	48.26	58.55	64.67	70.67	222.40	266.88	10.20
160-2										124.02	130.02	444.80	533.76	20.25
160-3										182.57	188.57	667.20	800.64	30.31
160-4										241.12	247.12	889.60	1067.52	40.35
160-5										299.67	305.67	1103.10	1323.72	50.40
160-6										358.22	364.22	1299.90	1547.88	60.45
180-1	36A	57.15	2 1/4"	35.71	35.48	17.46	7.20	54.31	65.84	72.70	77.10	280.20	336.24	13.95
180-2										138.50	142.90	560.50	672.60	27.62
180-3										204.40	208.80	840.70	1008.84	41.29
180-4										270.20	274.60	1120.60	1344.96	54.96
180-5										336.00	340.40	1389.80	1667.76	68.63
180-6										401.90	406.30	1625.20	1950.24	82.30
200-1	40A	63.50	2 1/2"	39.68	37.85	19.84	8.35	60.30	71.55	80.00	87.00	347.00	416.40	16.86
200-2										151.60	158.60	693.90	832.68	33.42
200-3										223.20	230.00	1040.90	1249.08	50.50
200-4										294.55	301.60	1388.00	1665.60	66.54
200-5										366.10	373.10	1721.10	2065.32	83.10
200-6										437.65	444.70	2012.60	2415.12	99.68
240-1	48A	76.20	3"	47.63	47.35	23.80	10.00	72.38	87.83	99.00	106.00	500.40	600.48	24.25
240-2										188.30	195.30	1000.80	1200.96	48.13
240-3										276.10	283.10	1501.30	1801.56	72.01
240-4										363.93	370.90	2001.60	2401.92	95.89
240-5										451.76	458.80	2482.00	2978.40	119.77
240-6										539.60	547.60	2902.30	3482.76	143.65