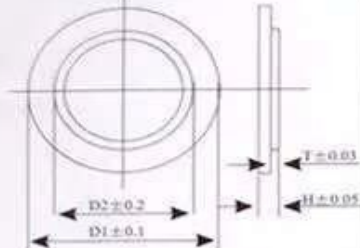
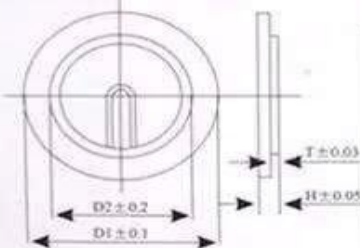
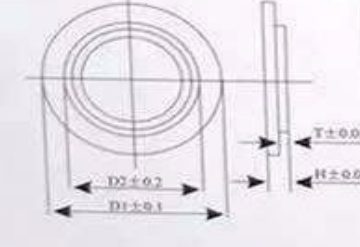


主要技术参数 (The main technical parameters)

类别 Classification	型号 Model	尺寸 Dimensions(mm)				特性 Characteristics				
		D1 ±0.1	D2 ±0.2	T ±0.03	H ±0.05	Fr(KHZ)	R(Ω)	C±30%(PF)		
A 型 MODEL A  B 型 MODEL B  C 型 MODEL C 	普通型 General Type	FT-12T-18A ₁	12	9	0.18	0.39	18.5±1.0	≤400	5000	
		FT-15T-10A ₁	15	11	0.18	0.39	10.5±0.7	≤300	8000	
		FT-15T12H-12A ₁	15(12)	11	0.18	0.39	13±0.7	≤350	8000	
		FT-20T-6A ₁	20	15	0.21	0.42	6.8±0.7	≤300	15000	
		FT-20G-7A ₁	20	15	0.21	0.42	7.0±0.7	≤300	15000	
		FT-27T-4A ₁	27	20	0.23	0.45	4.0±0.5	≤200	28000	
		FT-27T-3A ₁	27	20	0.15	0.38	3.5±0.5	≤300	28000	
		FT-27G-4A ₁	27	20	0.21	0.42	4.2±0.5	≤200	28000	
		FT-31T-2A ₁	31	20	0.23	0.45	2.9±0.5	≤300	28000	
		FT-35T-2A ₁	35	25	0.23	0.45	2.6±0.5	≤250	38000	
		FT-35G-2A ₁	35	25	0.23	0.45	2.7±0.5	≤250	38000	
		FT-38T-2A ₁	38	25	0.23	0.45	2.0±0.5	≤500	40000	
		FT-41T-4A ₁	41	25	0.23	0.45	4.5±0.5	≤250	45000	
		FT-47T-3A ₁	47	25	0.23	0.45	3.6±0.3	≤300	50000	
		FT-50T-3A ₁	50	25	0.23	0.45	3.2±0.5	≤200	40000	
		FT-50T-1A ₁	50	30	0.23	0.45	1.3±0.5	≤800	55000	
	薄型 Thin Type	FT-15T-6BE	15	11	0.1	0.22	6.3±0.5	≤600	15000	
		FT-20T-3BE	20	15	0.1	0.22	3.9±0.3	≤400	25000	
		FT-21T-3BE	21	20	0.1	0.22	3.5±0.3	≤250	50000	
		FT-27T-2BE	27	20	0.1	0.22	2.6±0.3	≤200	50000	
		FT-31T-1BE	31	20	0.1	0.22	1.7±0.3	≤800	50000	
		FT-31G-1BE	31	20	0.1	0.22	1.9±0.3	≤800	50000	
		FT-35T-1BE	35	25	0.1	0.22	1.8±0.3	≤300	50000	
		FT-41T-1BE	41	25	0.1	0.22	1.3±0.3	≤1200	80000	
		FT-50T-2BE	50	25	0.1	0.22	2.0±0.3	≤200	80000	
	普通型 General Type	FT-15T-11B ₁	15	11	0.21	0.42	11±0.7	≤400	5500	
		FT-20T-6B ₁	20	15	0.21	0.42	6.8±0.7	≤350	12000	
		FT-27T-4B ₁	27	20	0.23	0.45	4.1±0.7	≤250	21000	
		FT-27G-4B ₁	27	20	0.23	0.45	4.3±0.7	≤250	21000	
		FT-35T-2B ₁	35	25	0.23	0.45	2.6±0.7	≤200	30000	
		FT-50T-3B ₁	50	25	0.23	0.45	3.2±0.5	≤250	30000	
		薄型 Thin Type	FT-15T-6BS	15	11	0.1	0.22	6.5±0.3	≤600	12000
			FT-20T-4BS	20	15	0.1	0.22	4.2±0.3	≤300	20000
			FT-27T-2BS	27	20	0.1	0.22	2.4±0.3	≤200	40000
			FT-35T-2BS	35	25	0.1	0.22	2.0±0.3	≤350	65000
			FT-50T-2BS	50	25	0.1	0.22	2.1±0.3	≤350	55000