



# Thousand Hundred Industrial Co., Ltd.

## Split-Core Current Transformers 50/60Hz

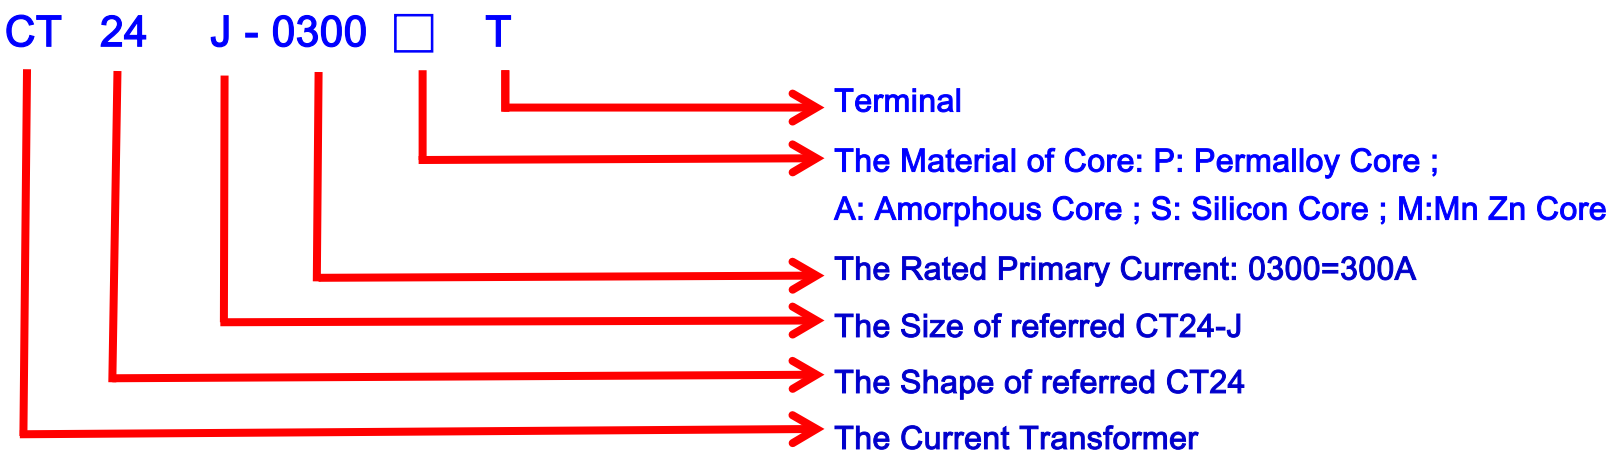
[ella@thic.net](mailto:ella@thic.net)

■ UL Approved No: E318452

■ CE Approved No: E0507126

- Frequency Range:50 /60Hz
- Operating Temperature Range: -20°C to +85°C
- Storage Temperature Range: -25°C to +90°C
- Rated System Voltage: 600V AC.
- All Current ,Voltage refer to RMS Value.
- Isolated Voltage : 2500V AC.
- Fully RoHS Compliant.
- Products are in accordance with UL requirements.

### Nomination



### Quick To Choose

| Item | Type           | Accuracy (%) | Primary Current | Mechanical Dimensions             |                                  |                      | SPEC<br>Download/<br>Link                                                             |
|------|----------------|--------------|-----------------|-----------------------------------|----------------------------------|----------------------|---------------------------------------------------------------------------------------|
|      |                |              |                 | L*W                               | ID                               | HT                   |                                                                                       |
|      |                |              |                 | mm/inch                           |                                  |                      |                                                                                       |
| 40   | CT24-I<br>(1A) | ≥ 1%         | 50A~600A        | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969  | <u>31.4</u><br>1.236 |  |
| 41   | CT24-J<br>(1A) | ≥ 1%         | 200A~1000A      | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969  | <u>31.4</u><br>1.236 |  |
| 42   | CT24-K<br>(1A) | ≥ 1%         | 300A~2000A      | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |  |
| 43   | CT24-L<br>(1A) | ≥ 1%         | 500A~3000A      | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |
| 44   | CT24-I<br>(5A) | ≥ 1%         | 50A~600A        | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969  | <u>31.4</u><br>1.236 |  |
| 45   | CT24-J<br>(5A) | ≥ 1%         | 200A~1200A      | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969  | <u>31.4</u><br>1.236 |  |
| 46   | CT24-K<br>(5A) | ≥ 1%         | 300A~2000A      | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |  |
| 47   | CT24-L<br>(5A) | ≥ 1%         | 500A~3000A      | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |



Thousand Hundred Industrial Co., Ltd.  
Split-Core Current Transformers 50/60Hz  
(Output 1A )

RoHS Compliant

CE/UL- Approved

[ella@thic.net](mailto:ella@thic.net)

Type : CT24-I


Primary Current : 50A~600A

ID=50.8\*50.0mm

Type : CT24-J

Primary Current : 200A~1000A

ID= 89.8\*50.0mm

| Part Number  | Current Ratio | Accuracy Class (%) | Turns Ratio (Np:Ns) | Burden RL | Approx. Weight (g) | Mechanical Dimensions             |                                 |                      | SPEC Download/ Link                                                                                                                                                            |                                                                                       |
|--------------|---------------|--------------------|---------------------|-----------|--------------------|-----------------------------------|---------------------------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|              |               |                    |                     |           |                    | L*W                               | ID                              | HT                   |                                                                                                                                                                                |                                                                                       |
|              |               |                    |                     |           |                    | mm/inch                           |                                 |                      |                                                                                                                                                                                |                                                                                       |
| CT24-I-0050T | 50A /1A       | 10                 | 1:50                | 1         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                             |                                                                                       |
| CT24-I-0075T | 75A /1A       | 10                 | 1:75                | 1         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-I-0100T | 100A /1A      | 3                  | 1:100               | 1         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-I-0125T | 125A /1A      | 2                  | 1:125               | 1         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-I-0150T | 150A /1A      | 1                  | 1:150               | 1         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |   |
| CT24-I-0200T | 200A /1A      | 1                  | 1:200               | 2         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-I-0250T | 250A /1A      | 1                  | 1:250               | 2         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 | <br> |                                                                                       |
| CT24-I-0300T | 300A /1A      | 1                  | 1:300               | 2         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-I-0400T | 400A /1A      | 1                  | 1:400               | 2         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-I-0500T | 500A /1A      | 1                  | 1:500               | 5         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-I-0600T | 600A /1A      | 1                  | 1:600               | 5         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-J-0200T | 200A /1A      | 1                  | 1:200               | 1         | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |  |
| CT24-J-0250T | 250A /1A      | 1                  | 1:250               | 1         | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-J-0300T | 300A /1A      | 1                  | 1:300               | 1         | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-J-0400T | 400A /1A      | 1                  | 1:400               | 1         | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-J-0500T | 500A /1A      | 1                  | 1:500               | 1         | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                           |                                                                                       |
| CT24-J-0600T | 600A /1A      | 1                  | 1:600               | 1         | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-J-0700T | 700A /1A      | 1                  | 1:700               | 1         | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 | <br> |                                                                                       |
| CT24-J-0800T | 800A /1A      | 1                  | 1:800               | 1         | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-J-0900T | 900A /1A      | 1                  | 1:900               | 1         | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |
| CT24-J-1000T | 1000A /1A     | 1                  | 1:1000              | 1         | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                |                                                                                       |



Thousand Hundred Industrial Co., Ltd.  
Split-Core Current Transformers 50/60Hz

(Output 1A )

Type : CT24-K

Primary Current : 300A~2000A

ID=120.8\*50.0mm

RoHS Compliant

CE/UL- Approved

[ella@thic.net](mailto:ella@thic.net)

| Part Number  | Current Ratio | Accuracy Class (%) | Turns Ratio (Np:Ns) | Burden RL | Approx. Weight (g) | Mechanical Dimensions             |                                  |                      | SPEC Download/ Link |
|--------------|---------------|--------------------|---------------------|-----------|--------------------|-----------------------------------|----------------------------------|----------------------|---------------------|
|              |               |                    |                     |           |                    | L*W                               | ID                               | HT                   |                     |
|              |               |                    |                     |           |                    | mm/inch                           |                                  |                      |                     |
| CT24-K-0300T | 300A /1A      | 1                  | 1:300               | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-0400T | 400A /1A      | 1                  | 1:400               | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-0500T | 500A /1A      | 1                  | 1:500               | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-0550T | 550A /1A      | 1                  | 1:550               | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-0600T | 600A /1A      | 1                  | 1:600               | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-0700T | 700A /1A      | 1                  | 1:700               | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-0800T | 800A /1A      | 1                  | 1:800               | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-0900T | 900A /1A      | 1                  | 1:900               | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-1000T | 1000A /1A     | 1                  | 1:1000              | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-1200T | 1200A /1A     | 1                  | 1:1200              | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-1500T | 1500A /1A     | 1                  | 1:1500              | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-1800T | 1800A /1A     | 1                  | 1:1800              | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |
| CT24-K-2000T | 2000A /1A     | 1                  | 1:2000              | 1         | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                     |



Thousand Hundred Industrial Co., Ltd.  
Split-Core Current Transformers 50/60Hz

(Output 1A )

[ella@thic.net](mailto:ella@thic.net)



Type : CT24-L

Primary Current : 500A~3000A

ID=160.8\*70.0mm

RoHS Compliant

CE/UL- Approved

| Part Number  | Current Ratio | Accuracy Class (%) | Turns Ratio (Np:Ns) | Burden RL | Approx. Weight (g) | Mechanical Dimensions             |                                  |                      | SPEC Download/ Link                                                                   |
|--------------|---------------|--------------------|---------------------|-----------|--------------------|-----------------------------------|----------------------------------|----------------------|---------------------------------------------------------------------------------------|
|              |               |                    |                     |           |                    | L*W                               | ID                               | HT                   |                                                                                       |
|              |               |                    |                     |           |                    | mm/inch                           |                                  |                      |                                                                                       |
| CT24-L-0500T | 500A /1A      | 1                  | 1:500               | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |    |
| CT24-L-0600T | 600A /1A      | 1                  | 1:600               | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-0700T | 700A /1A      | 1                  | 1:700               | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-0800T | 800A /1A      | 1                  | 1:800               | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |
| CT24-L-0900T | 900A /1A      | 1                  | 1:900               | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-1000T | 1000A /1A     | 1                  | 1:1000              | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-1200T | 1200A /1A     | 1                  | 1:1200              | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |
| CT24-L-1500T | 1500A /1A     | 1                  | 1:1500              | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-1800T | 1800A /1A     | 1                  | 1:1800              | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-2000T | 2000A /1A     | 1                  | 1:2000              | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |
| CT24-L-2200T | 2200A /1A     | 1                  | 1:2200              | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-2500T | 2500A /1A     | 1                  | 1:2500              | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-3000T | 3000A /1A     | 1                  | 1:3000              | 1         | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |



Thousand Hundred Industrial Co., Ltd.  
Split-Core Current Transformers 50/60Hz  
(Output 5A )

RoHS Compliant

CE/UL- Approved

[ella@thic.net](mailto:ella@thic.net)

Type : CT24-I


Primary Current : 50A~600A

ID=50.8\*50.0mm

Type : CT24-J

Primary Current : 200A~1200A

ID= 89.8\*50.0mm

| Part Number  | Current Ratio | Accuracy Class (%) | Turns Ratio (Np:Ns) | Burden RL | Approx. Weight (g) | Mechanical Dimensions             |                                 |                      | SPEC Download/ Link                                                                   |                                                                                       |
|--------------|---------------|--------------------|---------------------|-----------|--------------------|-----------------------------------|---------------------------------|----------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|              |               |                    |                     |           |                    | L*W                               | ID                              | HT                   |                                                                                       |                                                                                       |
|              |               |                    |                     |           |                    | mm/inch                           |                                 |                      |                                                                                       |                                                                                       |
| CT24-I-0050T | 50A / 5A      | 10                 | 1:10                | 1         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |    |                                                                                       |
| CT24-I-0075T | 75A / 5A      | 10                 | 1:15                | 1         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-I-0100T | 100A / 5A     | 3                  | 1:20                | 1         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-I-0125T | 125A / 5A     | 2                  | 1:25                | 1         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-I-0150T | 150A / 5A     | 1                  | 1:30                | 1         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                       |   |
| CT24-I-0200T | 200A / 5A     | 1                  | 1:40                | 2         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-I-0250T | 250A / 5A     | 1                  | 1:50                | 2         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-I-0300T | 300A / 5A     | 1                  | 1:60                | 2         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-I-0400T | 400A / 5A     | 1                  | 1:80                | 2         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |  |                                                                                       |
| CT24-I-0500T | 500A / 5A     | 1                  | 1:100               | 5         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-I-0600T | 600A / 5A     | 1                  | 1:120               | 5         | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                       |  |
| CT24-J-0200T | 200A / 5A     | 1                  | 1:40                | 0.04      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-J-0250T | 250A / 5A     | 1                  | 1:50                | 0.04      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-J-0300T | 300A / 5A     | 1                  | 1:60                | 0.2       | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-J-0400T | 400A / 5A     | 1                  | 1:80                | 0.2       | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-J-0500T | 500A / 5A     | 1                  | 1:100               | 0.2       | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |  |                                                                                       |
| CT24-J-0600T | 600A / 5A     | 1                  | 1:120               | 0.2       | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-J-0700T | 700A / 5A     | 1                  | 1:140               | 0.2       | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-J-0800T | 800A / 5A     | 1                  | 1:160               | 0.2       | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                       |  |
| CT24-J-0900T | 900A / 5A     | 1                  | 1:180               | 0.2       | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-J-1000T | 1000A / 5A    | 1                  | 1:200               | 0.2       | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                       |                                                                                       |
| CT24-J-1200T | 1200A / 5A    | 1                  | 1:240               | 0.2       | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |  |                                                                                       |
|              |               |                    |                     |           |                    |                                   |                                 |                      |                                                                                       |                                                                                       |



Thousand Hundred Industrial Co., Ltd.  
Split-Core Current Transformers 50/60Hz

(Output 5A )

Type : CT24-K


Primary Current : 300A~2000A

ID=120.8\*50.0mm

RoHS Compliant

CE/UL- Approved

[ella@thic.net](mailto:ella@thic.net)

| Part Number  | Current Ratio | Accuracy Class (%) | Turns Ratio (Np:Ns) | Burden RL | Approx. Weight (g) | Mechanical Dimensions             |                                  |                      | SPEC Download/ Link                                                                   |
|--------------|---------------|--------------------|---------------------|-----------|--------------------|-----------------------------------|----------------------------------|----------------------|---------------------------------------------------------------------------------------|
|              |               |                    |                     |           |                    | L*W                               | ID                               | HT                   |                                                                                       |
|              |               |                    |                     |           |                    | mm/inch                           |                                  |                      |                                                                                       |
| CT24-K-0300T | 300A / 5A     | 1                  | 1:60                | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |    |
| CT24-K-0400T | 400A / 5A     | 1                  | 1:80                | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-K-0500T | 500A / 5A     | 1                  | 1:100               | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-K-0550T | 550A / 5A     | 1                  | 1:110               | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |  |
| CT24-K-0600T | 600A / 5A     | 1                  | 1:120               | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-K-0700T | 700A / 5A     | 1                  | 1:140               | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-K-0800T | 800A / 5A     | 1                  | 1:160               | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |  |
| CT24-K-0900T | 900A / 5A     | 1                  | 1:180               | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-K-1000T | 1000A / 5A    | 1                  | 1:200               | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-K-1200T | 1200A / 5A    | 1                  | 1:240               | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |  |
| CT24-K-1500T | 1500A / 5A    | 1                  | 1:300               | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-K-1800T | 1800A / 5A    | 1                  | 1:360               | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-K-2000T | 2000A / 5A    | 1                  | 1:400               | 0.2       | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |  |





Thousand Hundred Industrial Co., Ltd.  
Split-Core Current Transformers 50/60Hz  
(Output 5A )

[ella@thic.net](mailto:ella@thic.net)

Type : CT24-L  
Primary Current : 500A~3000A  
ID=160.8\*70.0mm

RoHS Compliant  
CE/UL- Approved

| Part Number  | Current Ratio | Accuracy Class (%) | Turns Ratio (Np:Ns) | Burden RL | Approx. Weight (g) | Mechanical Dimensions             |                                  |                      | SPEC Download/ Link                                                                   |
|--------------|---------------|--------------------|---------------------|-----------|--------------------|-----------------------------------|----------------------------------|----------------------|---------------------------------------------------------------------------------------|
|              |               |                    |                     |           |                    | L*W                               | ID                               | HT                   |                                                                                       |
|              |               |                    |                     |           |                    | mm/inch                           |                                  |                      |                                                                                       |
| CT24-L-0500T | 500A / 5A     | 1                  | 1:100               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |    |
| CT24-L-0600T | 600A / 5A     | 1                  | 1:120               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-0700T | 700A / 5A     | 1                  | 1:140               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-0800T | 800A / 5A     | 1                  | 1:160               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |
| CT24-L-0900T | 900A / 5A     | 1                  | 1:180               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-1000T | 1000A / 5A    | 1                  | 1:200               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-1200T | 1200A / 5A    | 1                  | 1:240               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |
| CT24-L-1500T | 1500A / 5A    | 1                  | 1:300               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-1800T | 1800A / 5A    | 1                  | 1:360               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-2000T | 2000A / 5A    | 1                  | 1:400               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |
| CT24-L-2200T | 2200A / 5A    | 1                  | 1:440               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-2500T | 2500A / 5A    | 1                  | 1:500               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-3000T | 3000A / 5A    | 1                  | 1:600               | 0.2       | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |



# Thousand Hundred Industrial Co., Ltd.

## Split-Core Current Transformers 50/60Hz

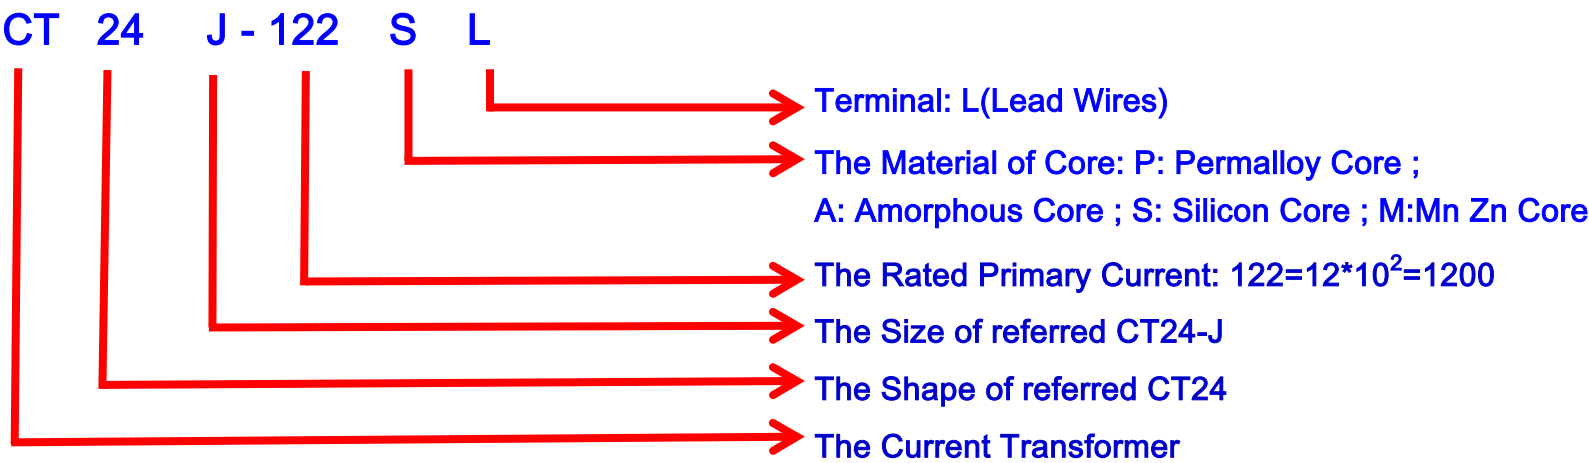
[ella@thic.net](mailto:ella@thic.net)

■ UL Approved No: E318452

■ CE Approved No: E0507126

- Frequency Range:50 /60Hz
- Operating Temperature Range: -20°C to +85°C
- Storage Temperature Range: -25°C to +90°C
- Rated System Voltage: 600V AC.
- All Current ,Voltage refer to RMS Value.
- Isolated Voltage : 2500V AC.
- Fully RoHS Compliant.
- Products are in accordance with UL requirements.

### Nomination



### Quick To Choose

| Item | Type           | Accuracy (%) | Primary Current | Mechanical Dimensions             |                                  |                      | SPEC<br>Download/<br>Link                                                             |
|------|----------------|--------------|-----------------|-----------------------------------|----------------------------------|----------------------|---------------------------------------------------------------------------------------|
|      |                |              |                 | L*W                               | ID                               | HT                   |                                                                                       |
|      |                |              |                 | mm/inch                           |                                  |                      |                                                                                       |
| 17   | CT24-I<br>(mA) | ≥ 1%         | 100A~600A       | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969  | <u>31.4</u><br>1.236 |  |
| 18   | CT24-J<br>(mA) | ≥ 1%         | 100A~1200A      | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969  | <u>31.4</u><br>1.236 |  |
| 19   | CT24-K<br>(mA) | ≥ 1%         | 300A~2000A      | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |  |
| 20   | CT24-L<br>(mA) | ≥ 1%         | 500A~3000A      | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |






Thousand Hundred Industrial Co., Ltd.  
Split-Core Current Transformers  
(Output mA )

RoHS Compliant

CE/UL- Approved

[ella@thic.net](mailto:ella@thic.net) Type : CT24-I  
Primary Current : 100A~600A  
ID=50.8\*50.0mm

Type : CT24-J  
Primary Current : 100A~1200A  
ID= 89.8\*50.0mm

| Part Number  | Current Ratio | Accuracy Class (%) | Turns Ratio (Np:Ns) | Burden RL | Approx. Weight (g) | Mechanical Dimensions             |                                 |                      | SPEC Download/Link                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------|---------------|--------------------|---------------------|-----------|--------------------|-----------------------------------|---------------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|              |               |                    |                     |           |                    | L*W                               | ID                              | HT                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|              |               |                    |                     |           |                    | mm/inch                           |                                 |                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-I-100ST | 100A / 100mA  | 1                  | 1:1000              | 100Ω      | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 | <br><br><br><br><br><br><br><br>                                                                                                                                                                                         |
| CT24-I-150ST | 150A / 100mA  | 1                  | 1:1500              | 100Ω      | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-I-200ST | 200A / 100mA  | 1                  | 1:2000              | 100Ω      | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-I-250ST | 250A / 100mA  | 0.5                | 1:2500              | 100Ω      | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-I-300ST | 300A / 100mA  | 0.5                | 1:3000              | 100Ω      | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-I-400ST | 400A / 100mA  | 0.5                | 1:4000              | 100Ω      | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-I-500ST | 500A / 100mA  | 0.5                | 1:5000              | 100Ω      | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-I-600ST | 600A / 100mA  | 0.5                | 1:6000              | 100Ω      | 600                | <u>116.0*110.0</u><br>4.567*4.331 | <u>50.8*50.0</u><br>2.000*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-J-100ST | 100A / 100mA  | 1                  | 1:1000              | 100Ω      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 | <br><br><br><br><br><br><br><br><br><br> |
| CT24-J-150ST | 150A / 100mA  | 1                  | 1:1500              | 100Ω      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-J-200ST | 200A / 100mA  | 1                  | 1:2000              | 100Ω      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-J-250ST | 250A / 100mA  | 1                  | 1:2500              | 100Ω      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-J-300ST | 300A / 100mA  | 1                  | 1:3000              | 100Ω      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-J-400ST | 400A / 100mA  | 1                  | 1:4000              | 100Ω      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-J-500ST | 500A / 100mA  | 1                  | 1:5000              | 100Ω      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-J-600ST | 600A / 100mA  | 1                  | 1:6000              | 100Ω      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-J-102ST | 1000A / 100mA | 1                  | 1:10000             | 100Ω      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| CT24-J-122ST | 1200A / 100mA | 1                  | 1:12000             | 100Ω      | 900                | <u>155.0*110.0</u><br>6.102*4.331 | <u>89.8*50.0</u><br>3.535*1.969 | <u>31.4</u><br>1.236 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |



Thousand Hundred Industrial Co., Ltd.  
Split-Core Current Transformers  
(Output mA )


RoHS Compliant

[ella@thic.net](mailto:ella@thic.net)

Type : CT24-K  
Primary Current : 300A~2000A  
ID=120.8\*50.0mm

Type : CT24-L  
Primary Current : 500A~3000A  
ID= 160.8\*70.0mm

CE/UL- Approved

| Part Number  | Current Ratio | Accuracy Class (%) | Turns Ratio (Np:Ns) | Burden RL | Approx. Weight (g) | Mechanical Dimensions             |                                  |                      | SPEC Download/Link                                                                    |
|--------------|---------------|--------------------|---------------------|-----------|--------------------|-----------------------------------|----------------------------------|----------------------|---------------------------------------------------------------------------------------|
|              |               |                    |                     |           |                    | L*W                               | ID                               | HT                   |                                                                                       |
|              |               |                    |                     |           |                    | mm/inch                           |                                  |                      |                                                                                       |
| CT24-K-300ST | 300A / 100mA  | 1                  | 1:3000              | 100Ω      | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |    |
| CT24-K-400ST | 400A / 100mA  | 1                  | 1:4000              | 100Ω      | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-K-500ST | 500A / 100mA  | 1                  | 1:5000              | 100Ω      | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |  |
| CT24-K-600ST | 600A / 100mA  | 1                  | 1:6000              | 100Ω      | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-K-102ST | 1000A / 100mA | 1                  | 1:10000             | 100Ω      | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |  |
| CT24-K-152ST | 1500A / 100mA | 1                  | 1:15000             | 100Ω      | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-K-202ST | 2000A / 100mA | 1                  | 1:20000             | 100Ω      | 1,200              | <u>186.0*110.0</u><br>7.323*4.331 | <u>120.8*50.0</u><br>4.756*1.969 | <u>31.4</u><br>1.236 |  |
| CT24-L-300ST | 500A / 166mA  | 1                  | 1:3000              | 100Ω      | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |
| CT24-L-500ST | 600A / 120mA  | 1                  | 1:5000              | 100Ω      | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-600ST | 1000A / 166mA | 1                  | 1:6000              | 100Ω      | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |
| CT24-L-102ST | 1500A / 150mA | 1                  | 1:10000             | 100Ω      | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |
| CT24-L-152ST | 2000A / 133mA | 1                  | 1:15000             | 100Ω      | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |  |
| CT24-L-202ST | 3000A / 150mA | 1                  | 1:20000             | 100Ω      | 1,600              | <u>226.5*130.0</u><br>8.917*5.118 | <u>160.8*70.0</u><br>6.331*2.756 | <u>31.4</u><br>1.236 |                                                                                       |