


0717-1S Series



0717-1 S - P Q ## M

Series Switch Snap-in Terminal Panel Switch
Fuseholder Thickness Type

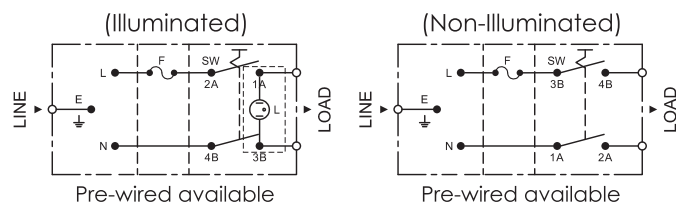

► Specification	► Inlet	► Rocker Switch
Power Rating	10A 250V AC	10A 250V AC
Electric Strength	AC 2,000V for 1 Minute	AC 1,500V for 1 Minute
Contact Resistance	30MΩ Max.	20MΩ Max.
Insulation Resistance	100MΩ Min. at 500V DC	100MΩ Min. at 500V DC
Operating Temperature	+90°C	+ 105°C
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy	Thermoplastic UL Flammability 94V-2 & Copper Alloy
Terminal	Q : Q.D / Solder Tab, 4.8 X 0.8 S : Solder Tab, 3.5 X 0.8	Q.D Tab, 4.8 X 0.8 Solder Tab, 3.5 X 0.8
Panel Thickness	Snap-in Panel Thickness : 0.8 / 1.0 / 1.2 / 1.4	M : Illuminated N : Non-Illuminated

Unit : mm

