

ENERGY STORAGE BATTERY

Uhome-LFP 2400



T: +86 0510 85366880

F: +86 0510 83203470


M: +86 135 4508 5033 (CHN)

Email: aoboet.cheng@aoboet.com.au

Add:1 Qianluo Rd, HuishanDistrict,Wuxi,JiangsuProvince,China.

Key Features

- Assembly freely in series or parallel Up to 8S8P
- High energy efficiency Energy efficiency (charge and discharge) > 97%
- High Rate Charge & Discharge
- More Safety Dual hardware & Triple software protection
- Safe and Reliable BMS Relay design instead of mosfet
- Long Life Reliable LFP cells,Cycle life >6000 cycles
- High Reliability Key devices (Relay,Fuse) approved by UL and IEC
- More Smart With digital monitor system App with WIFI
- Smart Design & Easy installation Plug in & off
- More Quiet Without fan,more quiet and reduce the risk of fan failure

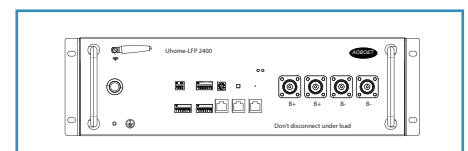

Technical Specifications

Model		Uhome-LFP 2400
Total Energy*		2.4kWh
Usable Energy(DC)*		2.2kWh
Nominal Dis-/Charge Power		1.5kW
Peak Power(Only Discharge)		3kW for 3sec
Constant Current(Only Discharge)		30A
Voltage		48~56Vd.c
Nominal Voltage		51.2Vd.c
Nominal Current		30A
Max. Charge Voltage		57.6Vd.c
Weight		28kg
Dimension(mm)		500*442*135mm
Max.recommended DOD		90%
Operating Condition		Indoor
Operating Temperature	Charge	From 0~50 ℃
	Discharge	From -10~55 ℃
WIFI Frequency Range		2400MHz~2483MHz
Humidity		< 60%(No condensed water)
Over Voltage Category		II
Cooling Type		Natural cooling
Case Material		Metal
Color		Black or Grey
Installation		Wall mounting/Ground Installation
IP rating		IP 20
Protective Class		I
Max. Connection Number		8S/8P
Warranty		10 years
Life Span		>15 years
Communication		CAN/ RS485
Protection Mode		Dual hardware protection
Battery Protection		Over-current/Over-voltage/Short circuit/ Under-voltage/Over temperature
Safety	Cell UL 1973	
	CE/TUV	
Hazardous Material Classification		9
Transportation		UN 38.3

Testing conditions based on temperature 25 ℃ at the beginning of life.

*Total Energy/Usable Energy measured under specific conditions from AOBOET 0.2C CC-CV