


HB SERIES

SINGLE POLE ROCKER SWITCHES UP TO 20A 125VAC,IP42 RATING
Classical outlook,soft or full lighting,fitting 3 panel cut-out




X=panel thickness

X	A		B		C	
	Dim.Y	Dim.Z	Dim.Y	Dim.Z	Dim.Y	Dim.Z
0.75 to 1.25mm	28.6+0/-0.1	13.8	28.6+0/-0.1	12.1	28.6+0/-0.1	13.4
1.25 to 2mm	28.8+0/-0.1	13.8	28.8+0/-0.1	12.1	28.8+0/-0.1	13.4
2 to 3mm	29.2+0/-0.1	13.8	29.2+0/-0.1	12.1	29.2+0/-0.1	13.4



- 20A 125VAC/16A 250VAC(UL,CSA)
- 3/4HP 125/250VAC(CSA)
- 6A 125VL,3/4HP 250VAC(UL)
- 16A 250VAC(ENEC)
- 16(4)A 250V~T125(VDE,SEMKO,DEMKO,NEMKO,FIMKO,SEV,ENEC)
- Initial contact resistance:20mΩ max.
- Insulation resistance:100MΩ min. at 500VDC
- Dielectric strength:1,000VAC for 1 minute.
- Electrical life:10,000 cycles
- Temperature range:-20°C to +125°C

- Switch for Class II appliances
- Base:Nylon 66,UL rated 94V-2 min
- Actuator:Nylon 66 or PC,UL rated 94V-2 min
- Spring:Piano wire
- Contact arm:Silver plated copper alloy
- Terminals:Silver plated alloy
- Lamp:Neon for AC;Tungsten bulb for DC
- Illuminated types offer only ON-OFF function
- Splash protected type conforming to IP42, offer only non-illuminated types,panel cut-out 28 ×13.7mm

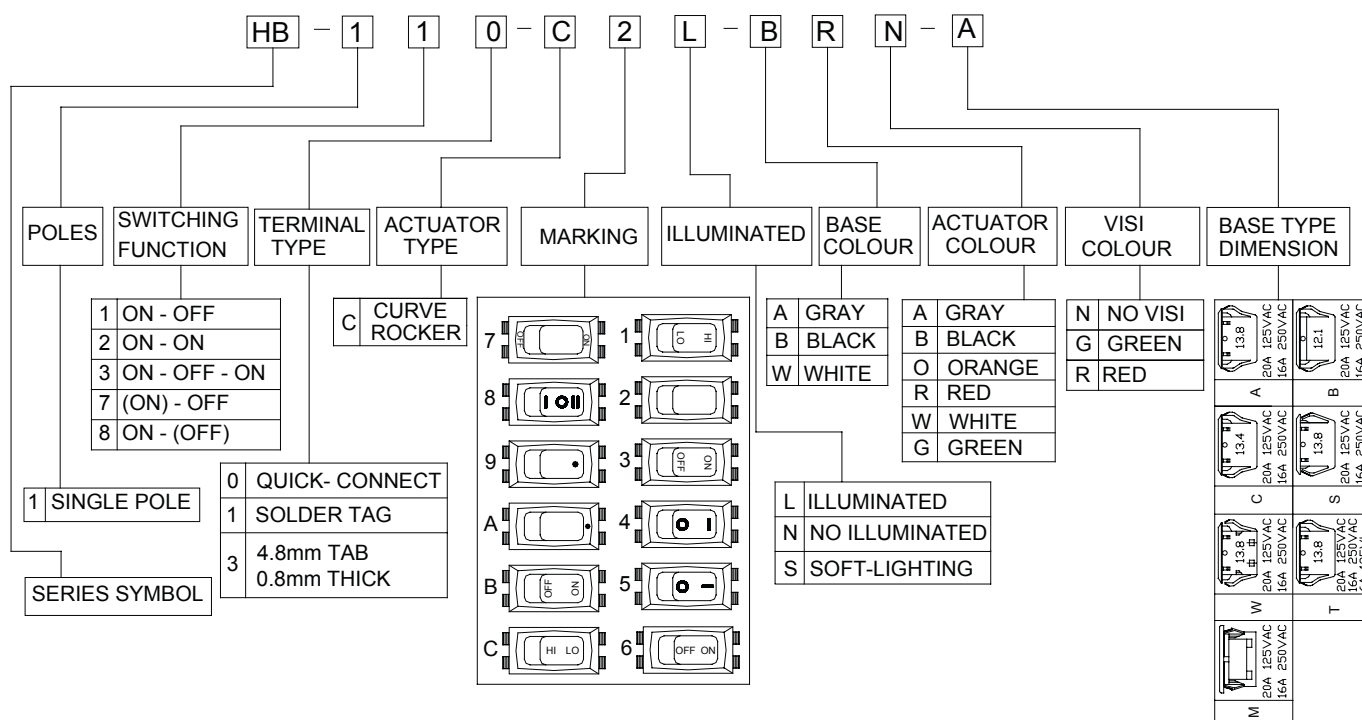



HB110-C2L-BRN-A

