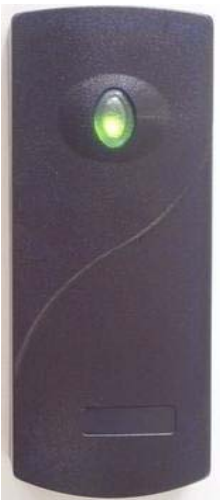


No.	Product P/N	Product Picture	Description	Dimensions	Notes
1	RAD-A200-R00		125KHz EM	L100 x W140 x H30 (mm)	RS232 RO
2	RAD-P400-R00		13.56 MHz Mifare	L100 x W140 x H30 (mm)	RS232 RW
3	RAD-PE23-R31		125 KHz EM / TK	L117 x W44 x H23 (mm)	RS232 RO
4	RAD-PE23-U31		125 KHz EM / TK		USB RO
5	RAD-PC23-S31		13.56 MHz Icode2		RS485 RW
6	RAD-PC23-R31		13.56 MHz Icode2		RS232 RW
7	RAD-PC23-U31		13.56 MHz Icode2		USB RW
8	RAD-PF23-S31		13.56 MHz Mifare		RS485 RW
9	RAD-PF23-R31		13.56 MHz Mifare		RS232 RW
10	RAD-PF23-U31		13.56 MHz Mifare		USB RW
11	RAD-PC23-U62		13.56 MHz Icode2	L100 x W67 x H18 (mm)	USB RW
12	RAD-PF23-U62		13.56 MHz Mifare		USB RW
13	RAD-PF23-R62		13.56 MHz Mifare		RS232 RW
14	RAD-PC23-R62		13.56 MHz Icode2		RS232 RW

No.	Product P/N	Product Picture	Description	Dimensions	Notes
15	RAD-PC23-R72		13.56 MHz Mid-Range Reader ICODE2	L200 x W138 x H30 (mm)	RS232 DC12V
16	RAD-PC23-U72		13.56 MHz Mid-Range Reader ICODE2		USB DC12V
17	RWD-E206-X15 <DCR-125>		125 kHz Long-Range Reader Wiegand 26/34	L265 x W265 x H35 (mm)	DC12~14V RS232 Read Range: 100 cm with our long range clamshell card
18	RWD-PS39-D24		UHF 915 MHz Long-Range Reader Wiegand 26/34	L460 x W460 X H50 (mm) ANT (12dbi)	RS232 RS485
19	HDP-F07-R40		13.56 MHz Read / Write ISO14443 A/B (Mifare)	L128 x W64 x H22 (mm)	32-bit CPU, 2MB Flash, 2MB RAM, Lithium Battery, RS232
20	HDE-E07-R40		125KHz Read Only EM		