

58mm POS Receipt Printer

Popular & Small



Features

USB / Ethernet / Bluetooth / WIFI / Cloud (WIFI/GPRS) / SMS (GSM)



80mm/s



58mm Paper



SDK & Demo



Multi-interface



Cost Effective



Compatible ESC/POS



SMS Printing



Windows/Linux



Multi-language

Interface

Various Communications



USB

USB+GSM

USB+LAN

USB+WIFI

USB+Bluetooth

Printing

High Reliability

Parts: USB Cable+Paper
Roll+Power Adaptor



- Direct thermal line
- 80mm/sec
- Barcode+Multi-language
- Print Head: 50km




www.szhcct.com

Paper

Drop-in easy paper loading

- Loading Method: Drop-in easy paper loading
- Paper Type: Thermal paper;
- Paper Width: 57.5±0.5mm
- Outer Diameter: 60mm(max.)
- Paper Thickness: 0.06~0.08mm

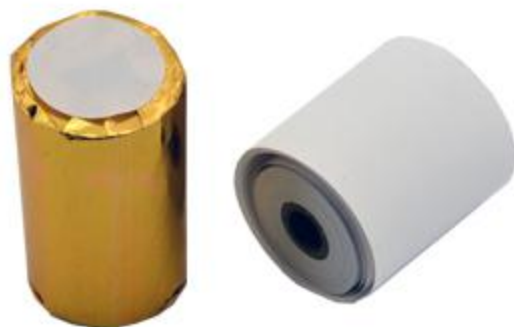

Driver

Support Windows/Linux

Provide

WM

WinCE

Symbian

Andriod

IOS

SDK & Demo.

Linux

Windows

**Provide API for cloud platform
development.**

Construction

Components of HCC-POS58D



Application

Food Delivery



Restaurant



Bus / Taxi Receipt



Traffic Citation



Logistics



Transportation



Warehouse Management



Delivery



Illegal Parking Ticket



Drugstore



Price Tag



Retail / Farm



Item	HCC-POS58D
Print Method	Direct thermal line
Print Speed	80mm/sec
Effective Print Width	48mm
Font	Dot Density: 384 dot/line Character Size ANK: Font A:12*24 , Chines:24*24 Barcode UPCA/UPCE/JAN13(EAN13)/JAN8(EAN8/CODE39/IT F/CODABAR/CODE93/CODE128/PDF417/QR Code/Data Matrix
Print Paper	Paper Type: Thermal paper; Paper Width: 57.5±0.5mm Outer Diameter: 60mm(max.) Paper Thickness: 0.06~0.08mm Loading Method: Drop-in easy paper loading
Reliability	Print Head: 50km
Print Command	Compatible with ESC/POS
Driver	Windows/Linux
Interface	USB/USB+Ethernet/USB+Bluetooth/USB+WIFI/USB+Cloud(WIFI/GPRS)/USB+SMS(GSM)
Power Supply	DC12V/2A
Weight	0.6KG
Dimension	124mmx122mmx130mm(WxLxH)
Operating Temp	0~50°C
Storage Temp	-20-60°C
Operating Humidity	10~80%
Storage Humidity	10%-90%(No condensation)