



1	2	3	4	5	6
DISPLAY TYPE	4.3" SMART UART TFT LCM	VIEWING DIRECTION	12°OCLOCK	DISPLAY LOGIC VOLTAGE	5.0V~24V
DISPLAY METHOD	TRANSMISSIVE/TN/NORMALLY/WHITE	BACKLIGHT	WHITE	CTP LOGIC VOLTAGE	CTP IC
				CTP IC	NP1038
				OPERATING TEMPERATURE	-20°C TO +70°C
				STORAGE TEMPERATURE	-30°C TO +80°C

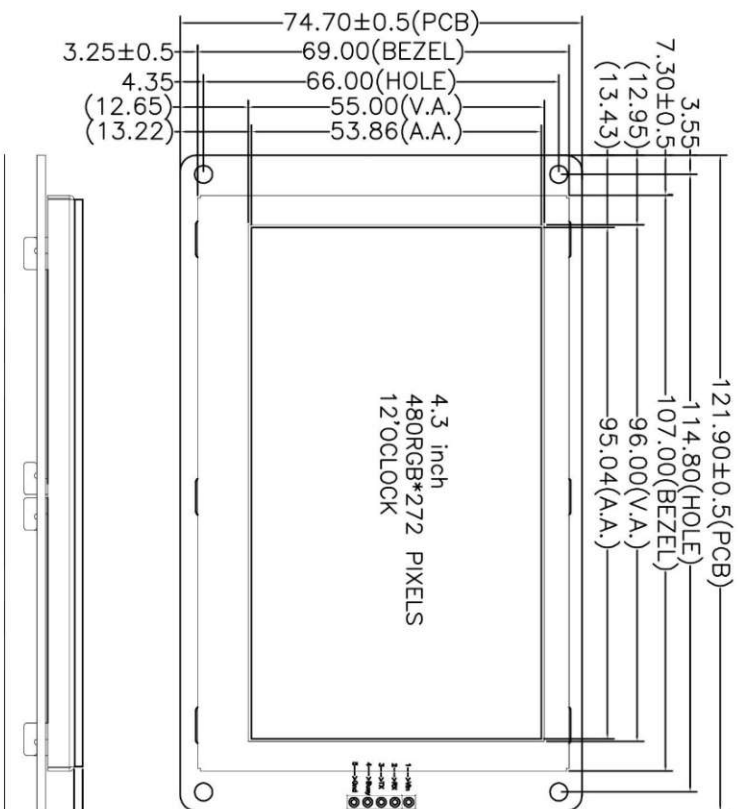

NOT-TP: NP480272C043SN-A0
RTP: NP480272C043SR-A0
CTP: NP480272C043SC-A0

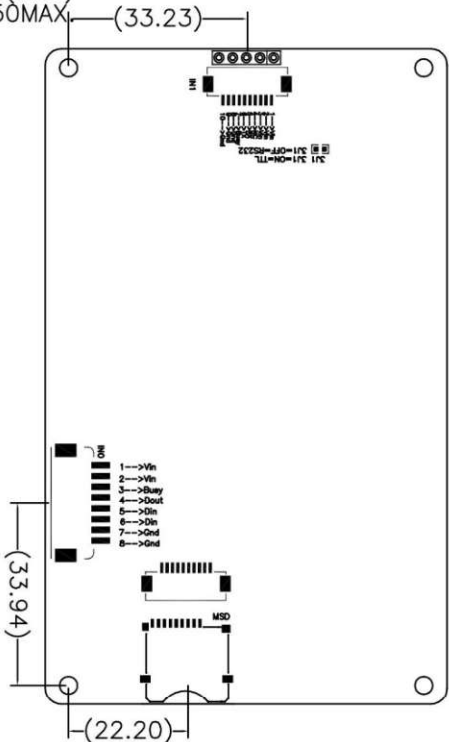

IN1:			IN0:		
PIN No.	SYMBOL	Description	PIN No.	SYMBOL	Description
1~3	Vin	Power supply input	1~2	Vin	Power supply input
4	NC	Undefined	3	Busy	Busy flag output
5	Rx	RS232 data input	4	Tx	RS232 data output
6	Tx	RS232 data output	5	Rx	RS232 data input
7	Busy	Busy flag output	6	Rx	RS232 data input
8~10	Gnd	Ground	7~8	Gnd	Ground

REVISION HISTORY			DRAWING INFORMATION		
REV.	SYMBOL	DESCRIPTION	NAME	DATE	CUSTOMER NO.
00	A	FIRST ISSUE		2018-2-8	XXXX
MARK* ARE IMPORTANT DIMENSIONS, MARK* ARE REFERENCE DIMENSIONS, MARK* ARE SPECIAL CHARACTERISTICS RELATED TO SAFETY, MARK* ARE SPECIAL CHARACTERISTICS IRRELEVANT TO SAFETY, MARK* ARE IMPORTANT CHARACTERISTICS EXCEPT FOR THE SPECIAL CHARACTERISTICS.			DRAWING INFORMATION		
			PART NO.	XXXX	NAME
			MODULE NO.	NP480272C043SN-A0	DATE
			CHECKED		2018-2-8
			APPROVED		