
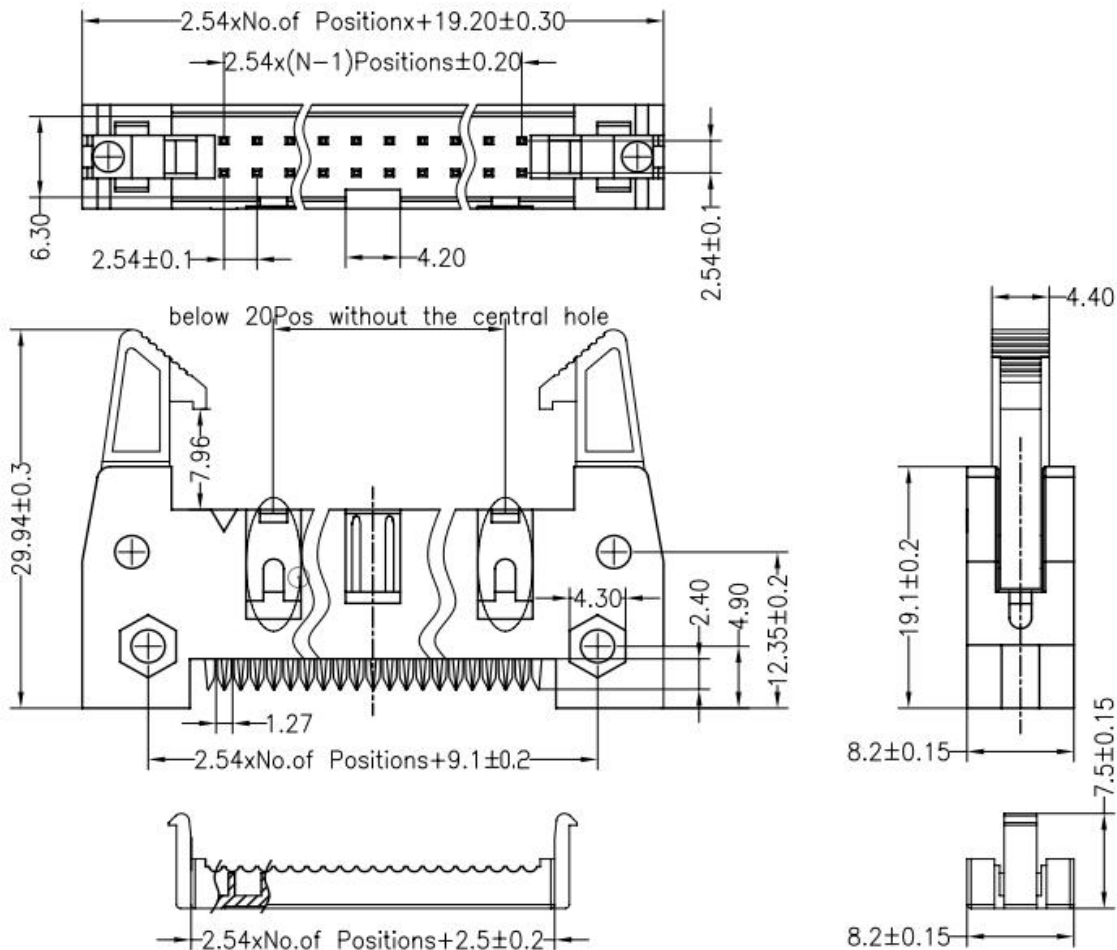


SPECIFICATIONS:

Rated Current	3.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	1000V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Au or SN over Ni
Insulator Material	PBT
Max. Processing Temp:	180°C for 30-60 seconds 200°C for 10 seconds

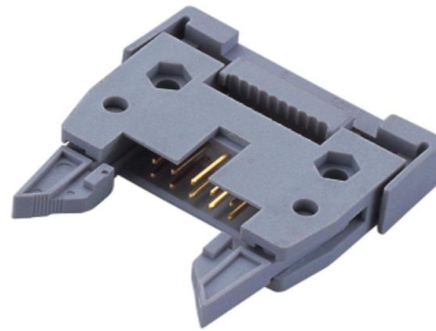

Ordering Information

HC Series	No.of Pin Per Row	Plating Code	Inner Code	Insulator Option	Insulator Color	Code Latch	Packing	End code
HC-EHC420	08P	G0=Gold Flash	N	A=PBT	B=Black	L=Long	0=PE Bag	X
2.54mm	64P	SN=Tin Plated			G=Grey		A=Tray	01
Ejector Header IDC		SM=Matted Tin					T=Tube	02
		S0=Gold/Tin						
		G1=3u Gold						
		G2=5u Gold						
		G3=10u Gold						
		G4=15u Gold						
		G5=30u Gold						
		S1=3u Gold/Tin						