

USER MANUAL

Safety Instructions:


1. Do not use a damaged or loose plug.
 - This may cause an electric shock or fire.
2. Do not pull the plug out by the wire nor touch the plug with wet hands.
 - This may cause an electric shock or fire.
3. Do not excessively bend the plug and wire nor place heavy objects upon them, which could cause damage.
 - Failure to do so may cause an electric shock or fire.
4. Disconnect the plug from the outlet during storms or lightening or if it is not used for a long period of time.
 - Failure to do so may cause an electric shock or fire.
5. Do not cover the vents on the monitor cabinet.
 - Bad ventilation may cause a breakdown or fire.
6. Put your monitor in a location with low humidity and a minimum of dust.
 - An electric shock or fire could result inside the monitor.
7. Do not drop the monitor when moving it.
 - This may cause damage to the product or human body.
8. Place the monitor on a flat and stable surface.
 - The monitor can cause injury by falling.
9. When cleaning the monitor case or the surface of the TFT-LCD, wipe with a slightly moistened, soft fabric.
10. If the connector between the plug and the pin is dusty or dirty, clean it properly with a dry cloth.
 - A dirty connector can cause an electric shock or fire
11. If your monitor does not operate normally - in particular, if there are any unusual sounds or smells coming from it - unplug it immediately and contact an authorized dealer or service.
 - This may cause an electric shock or a fire.
12. For each hour of looking at the monitor, you should let your eyes rest for 5 minutes.
 - This will reduce eye fatigue.

Unpacking:

Please make sure the following items are included with your monitor. If any items are missing, contact your dealer

Name	Unites	Quantity
Monitor	pcs	1
Inner bag(Optional)	pcs	1
Stand(Optional)	pcs	1
Remoter	pcs	1
Power adoptor	pcs	1
User manual	pcs	1
USB power cable	pcs	1
HDMI Cable	pcs	1
OTG Cable	pcs	1

Front and Rear

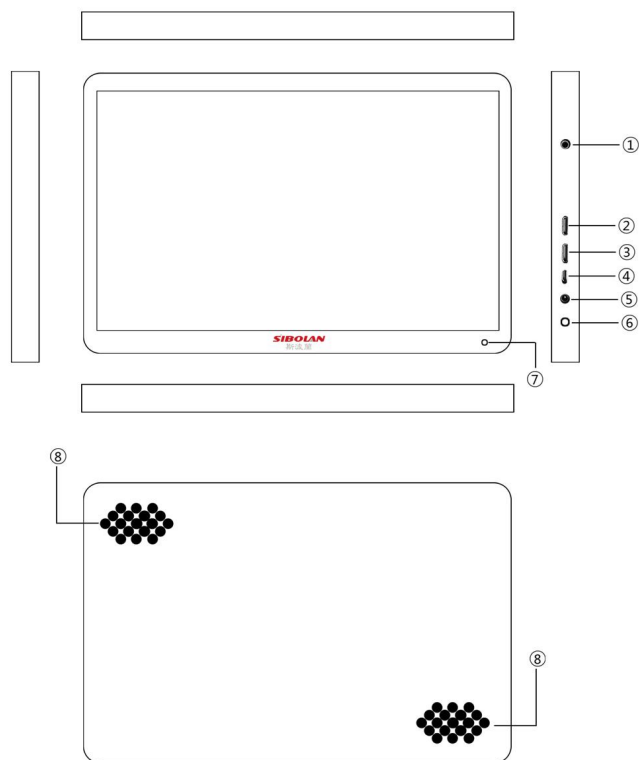

Number	Function instruction	Number	Function instruction
1	Headphone out	5	Power Port
2	Micro-HDMI	6	Power indicator
3	Micro-HDMI	7	IR port
4	Micro-USB	8	Speaker

Power indicator	Power on mode: Green Standby mode: Red Power off mode: no light
-----------------	---

Specifications

Model	Portable Monitor Model S2
Panel Type	13.3" TFT IPS LCD (16:9 Wide) LED Backlight
Resolution / Color Depth	1920(RGB) x1080(FHD) (16.7M colors) / Anti-Glare
Active Area	294mm x 165mm
Pixel Pitch	0.153mm (H) *0.153mm (H*V)
Viewing Angle(U/D/L/R)	85°/85°/85°/85° (Typical)
Contrast Ratio	800:1 (Typical)
Brightness	350(cd/m2)
Response Time	14(ms) (Typical)
Vertical Frequency	60Hz
Connectivity	Headphone outx1 Micro-HDMI x2 Micro-USB*1 DC-IN*1
Resolution Supported	1920*1080(60Hz/50Hz);1680*1050(60Hz/50Hz);1680*900(60Hz/50Hz); 1440*900(60Hz/50Hz);1440*1050(60Hz/50Hz);1366*768(60Hz/50Hz); 1280*1024(60Hz/50Hz);1280*800(60Hz/50Hz);1280*768(60Hz/50Hz); 1024*768(60Hz/50Hz);800*600(60Hz/50Hz);640*480(60Hz/50Hz) (Caution: If video output frequency of computer graphic card is out of the above range, it may cause the panel damage.)
HDMI Video Format	1080P(60Hz/50Hz);1080i(60Hz/50Hz);720P(60Hz/50Hz); 480P(60Hz)
Authorized Protection	HDCP complaint
Compatible	Compatible with: Xbox One, Xbox 360, PlayStation 4, PlayStation, PC and Mobile devices

Speakers	2x 1.5W(Max.)
Rating Voltage	5V---2.0A
Dimension(W/H/T)	318mmx200.5mmx13mm (Monitor) 352*230*85mm (Package)
Weight	800g(Monitor)
Operating Temperature	0~50℃
Storage Temperature	-20~60℃

Specification:

Model	Portable Monitor Model S2
Panel Type	11.6” TFT IPS LCD (16:9 Wide) LED Backlight
Resolution / Color Depth	1920(RGB) x1080(FHD) (16.7M colors) / Anti-Glare
Active Area	256mm x 144mm
Pixel Pitch	0.1335mm (H) *0.1335mm (H*V)
Viewing Angle(U/D/L/R)	89°/89°/89°/89° (Typical)
Contrast Ratio	700:1 (Typical)
Brightness	350(cd/m2)
Response Time	14(ms) (Typical)
Vertical Frequency	60Hz
Connectivity	Headphone outx1 Micro-HDMI x2 Micro-USB*1 DC-IN*1
Resolution Supported	1920*1080(60Hz/50Hz);1680*1050(60Hz/50Hz);1680*900(60Hz/50Hz); 1440*900(60Hz/50Hz);1440*1050(60Hz/50Hz);1366*768(60Hz/50Hz); 1280*1024(60Hz/50Hz);1280*800(60Hz/50Hz);1280*768(60Hz/50Hz); 1024*768(60Hz/50Hz);800*600(60Hz/50Hz);640*480(60Hz/50Hz) (Caution: If video output frequency of computer graphic card is out of the above range, it may cause the panel damage.)
Authorized Protection	HDCP complaint
Compatible	Compatible with: Xbox One, Xbox 360, PlayStation 4, PlayStation, PC and

Mobile devices

Speakers	2x 1.5W(Max.)
Rating Voltage	5V---2.0A
Dimension(W/H/T)	281*177.5*13 (Monitor) 352*230*85mm (Package)
Weight	750g(Monitor)
Operating Temperature	0~50℃
Storage Temperature	-20~60℃

Specification:

Model	Portable Monitor Model S3
Panel Type	15.6” TFT IPS LCD (16:9 Wide) LED Backlight
Resolution / Color Depth	1920(RGB) x1080(FHD) (262k colors) / Anti-Glare
Active Area	344mm x 194mm
Pixel Pitch	0.179mm (H) *0.179mm (H*V)
Viewing Angle(U/D/L/R)	89°/89°/89°/89° (Typical)
Contrast Ratio	800:1 (Typical)
Brightness	220(cd/m2)
Response Time	14(ms) (Typical)
Vertical Frequency	60Hz
Connectivity	Headphone outx1 Micro-HDMI x2 Micro-USB*1 DC-IN*1
Resolution Supported	1920*1080(60Hz/50Hz);1680*1050(60Hz/50Hz);1680*900(60Hz/50Hz); 1440*900(60Hz/50Hz);1440*1050(60Hz/50Hz);1366*768(60Hz/50Hz); 1280*1024(60Hz/50Hz);1280*800(60Hz/50Hz);1280*768(60Hz/50Hz); 1024*768(60Hz/50Hz);800*600(60Hz/50Hz);640*480(60Hz/50Hz) (Caution: If video output frequency of computer graphic card is out of the above range, it may cause the panel damage.)

Authorized Protection	HDCP complaint
Compatible	Compatible with: Xbox One, Xbox 360, PlayStation 4, PlayStation, PC and Mobile devices
Speakers	2x 1.5W(Max.)
Rating Voltage	5V---2.0A
Dimension(W/H/T)	409*235.5*13 (Monitor) 410*270*93mm (Package)
Weight	1300g(Monitor)
Operating Temperature	0~50℃
Storage Temperature	-20~60℃

Note : Design and specifications are subject to change without prior notice.

Remote Instruction



Authority

Information in this document is subject to change without notice.
 ©2016 Samsony technology Co., Ltd. All rights reserved.