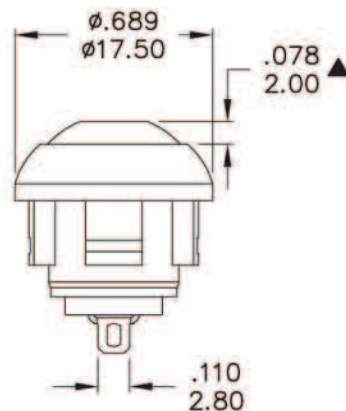
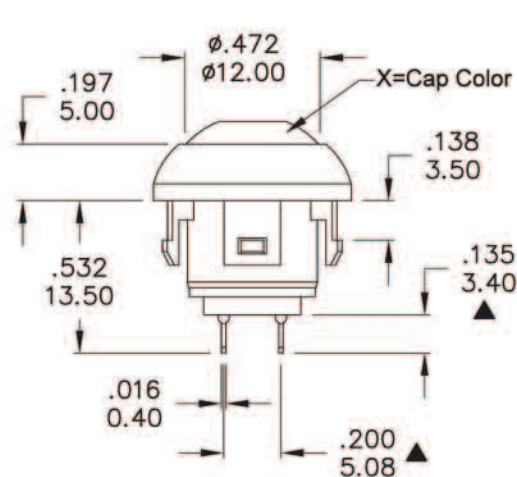


CESX-5
X=CAP COLOR

1	White
2	Black
3	Red
4	Orange
5	Yellow
6	Green
7	Blue

Model No.	POS.1	POS.2
PAS7	ON	MOM
Term. Comm.	SHORT	OPEN
SCHEMATIC		

SWITCH FUNCTION

SPECIFICATIONS

Max. current/voltage rating with resistive load:
400mA 32VAC - 100 mA 50VDC - 125 mA 125VAC.
INITIAL CONTACT RESISTANCE: 50 mΩ max.
INSULATION RESISTANCE: 1 GΩ min. at 500VDC.
DIELECTRIC STRENGTH: 1,000 VAC rms.
ELECTRICAL LIFE AT FULL LOAD: 500,000 cycles.
OPERATING TEMPERATURE: -30° to -85°.
PANEL THICKNESS: 3.0±0.25 mm (.118)
TOTAL TRAVEL: 1.5 mm(.059).
OPERATING FORCE: 2N~5N.
CONTACT BOUNCE: 10 ms.
MECHANICAL LIFE: 1,000,000 cycles.
SOLDERING: 350°C max. for 5 seconds.

MATERIALS

CASE: Diallyl phthalate (DAP)(UL94v-0).
CAP: Polyamide 6/6.
BUSHING: Polyamide 6/6, Rough Surface.
TERMINAL/CONTACTS: Gold over silver plated.
RoHS: 2002/95/EC

MCP-P004



TACLEX ELECTRONICS CO., LTD.

	符號	原尺寸	修改後尺寸	變更日期	SCALE (比例): 3:2	TITLE 圖名	Sub - Miniature Pushbutton Switches	SIZE 圖紙	A4
1	(A)		料號更正PAS6→PAS7	JUN-21-2011	TOLERANCE (公差): 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR: ± 5° FILE NAME: PASP0145	DWG NO. 圖號	(A) PAS7B3M1CESX-5	UNIT 單位	inch mm
2	(B)					REV. 版本	B	DATE 日期	JAN - 27 - 2010
3	(C)					CHECKED BY 審核	RICHARD	DRAWN BY 製圖	IRENE
4	(D)								
5	(E)								
								SHEET 張數	1 of 1