
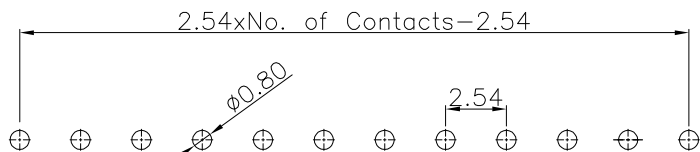

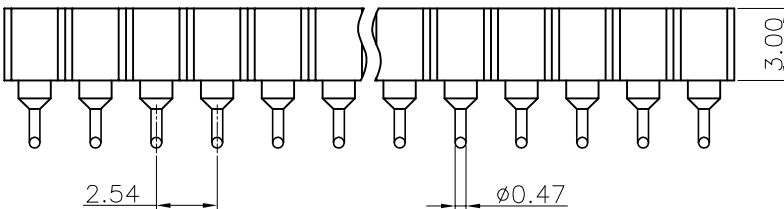


4			3			2			1		
零件图	成品图	客户图				REVISION DATA					
		○				REV	ECN No.	DESCRIPTION		NAME	DATE
						A0		NEW DRAWING		D.Y.Y	2023-02-02

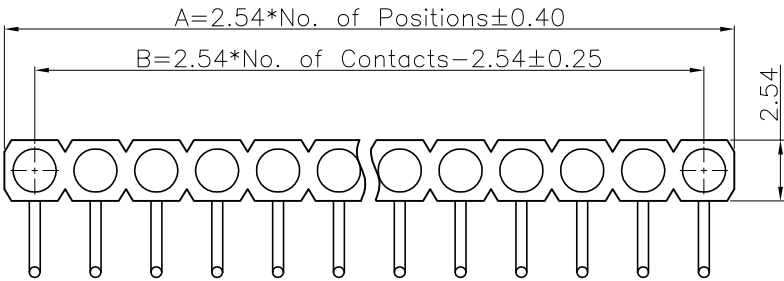

Recommended P.C.B Layout
General Tolerance ± 0.05

Technical Data

Material:

Pin(outer sleeve): Brass

Insulator black(housing): PPS (UL94V-0) Black

Plating:

PIN: Plating Gold Or Plating Tin100u" Min

TERMINAL: Plating Gold Or Plating Tin100u" Min

Under Plating: Nickel 50u" Min Overall.

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤ 4mΩ/contact

Insulation resistance: ≥ 1000MΩ at V=100V

Operating voltage: 60VAC/DC

Mechanical:

Mechanical life cycle: min.200

Operating temperatures: Gold Plated: -55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +260°C, 10s max

No. of Pins: 1x02 ~ 1x40 Pin

PA	R	XXX	0	7	E	X	00	0980E	0	00
	Angel Options	No. of Positions XXX Positions	Dip Spacing	Insulator Height	Insulator type	Pin Plated	Clip plated	Pin length(mm)	Insulator Option	Series
	D 180°直插 R 90°斜插 S SMT H 卧式贴片 A 半排SMT B 半排SMT 第1Pin朝下 第1Pin朝上		0 No 1 1.27mm 2 2.54mm 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm A 2.00mm S Special	0 No 1 1.20mm 2 1.90mm 3 2.00mm 4 2.10mm 5 2.80mm 6 2.80mm 7 3.00mm 8 3.80mm 9 4.10mm A 4.20mm B 7.00mm S Special	A PBT单排 B PBT双排 C PBT中空 D PBT带耳 E PPS单排 F PPS双排 G PPS中空 H PPS带耳 I PA46单排 J PA46双排 K PA46三排 L PA46半排 M LCP四排	0 No 1 Tin120u" Ⅲ 2 Tin200u" Ⅲ 3 Gold40 4u" 全 4 Gold80 8u" 全 5 Gold15u" 6 Gold15u" 7 Gold25u" 8 Gold35u" 9 Gold50u" A Gold50u" B Gold100u" C Gold150u" D Gold300u" E Ag plated F Nickel80u"	A 1 Tin120u" Ⅲ 2 Tin200u" Ⅲ 3 Gold40 4u" 全 4 Gold80 8u" 全 5 Gold15u" 6 Gold15u" 7 Gold25u" 8 Gold35u" 9 Gold50u" A Gold50u" B Gold100u" C Gold150u" D Gold300u" E Ag plated F Nickel80u"	0980E 9.80mm S Special	0 No	00 No

ANYCONN® 东莞市恩康电子科技有限公司					
www.enkcom.com TEL: +86(0)769 8904 9672 FAX: +86(0)769 8904 9671 E-MAIL: sales@anycom.tw					
DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD					
TOLERANCE	DATE :	2023-02-02	TITLE:		
ANGLE ±5°	DRAWN :	D.Y.Y	2.54mmPitch Sip Sockets Single Row Right Angle		
X.XXX ±0.15	CHECKED :		PART NO: PARXXX07EX000980E000		
X.XX ±0.25	APPROVED :				
X.X ±0.38	PROJECTON		REV: A0	UNIT: mm	SCALE: 1:1
X. ±0.50			SIZE: A4	PAGE: 1/1	