
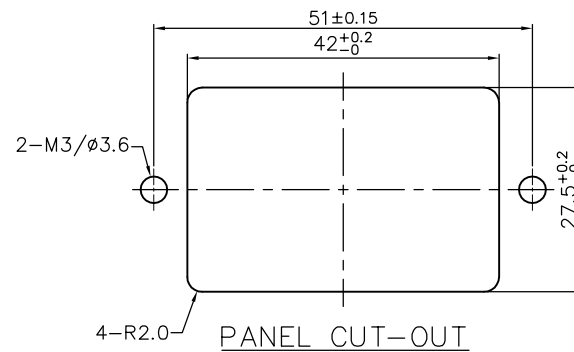
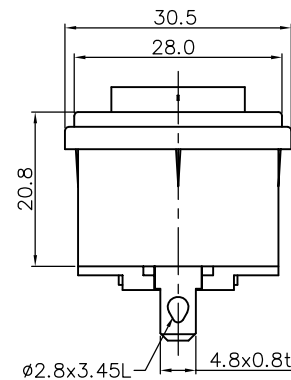
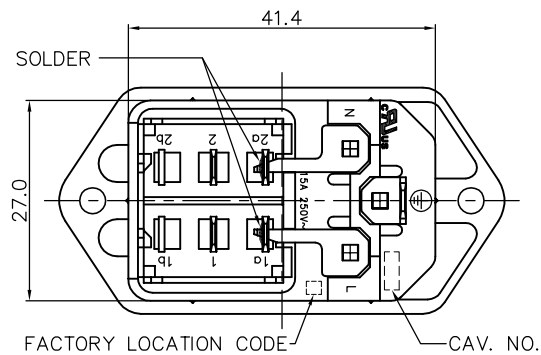
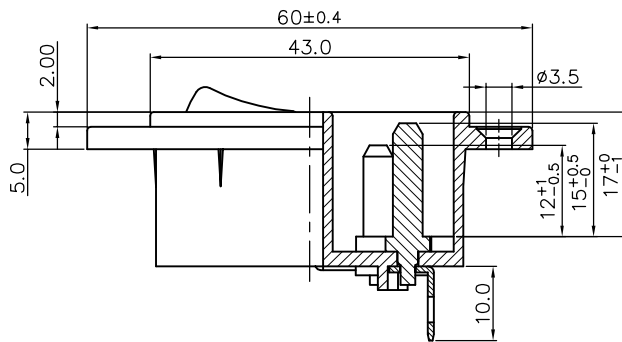


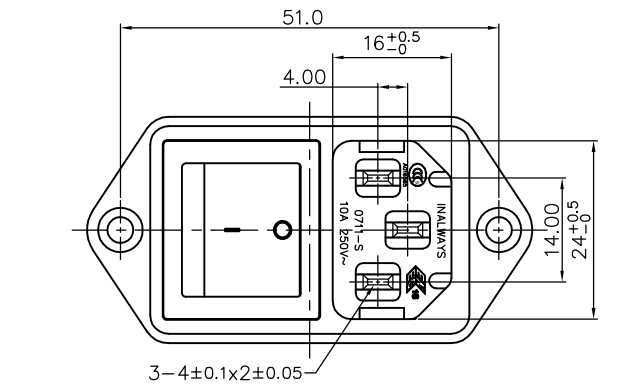

SPECIFICATION

A: MATERIAL:

1. HOUSING: PC, UL 94V-0
2. TERMINAL: COPPER ALLOY, TIN PLATED


B: CHARACTERISTICS:

1. RATING: 10A 250V~ EUROPE
15A 250V~ NORTH AMERICA
2. INSULATION RESISTANCE: 100 MΩ MIN, AT 500V DC
3. ELECTRIC STRENGTH: AC 2,000V FOR ONE MINUTE


C: APPROVALS:

UL, CUL, ENEC & CCC

D: DIAGRAM:



E: ORDERING INFORMATION:



E			
D			
C			
B			
A	2013.06.03	DGR13006-6	NEW REVISION
REV	DATE	DOCUMENT	DESCRIPTION

 深圳易凯达科技有限公司 WIN-KARE TECHNOLOGY CO.,LTD.				PART NO.: 0711-SCQ00-H		NAME: AC INLET 3P + SWITCH (SCREW-ON)			
TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: .000: ±0.1 .00 : ±0.2 .0 : ±0.3 ANGULAR: ±3°				MATERIAL: SEE ABOVE		SPEC.: IEC 60320-1, C14			
APPROVED		CHECKED		DESIGNER		NOTE:			
A 4				UNIT mm		SCALE 1 : 1		SHEET 1 of 1	
						DOC.#: S711-0023			