


MECHANICAL OUTLINE, UNIT:mm
(Unspecified Tolerances is: ±0.3 mm)


REV	DESCRIPTION:	DATE
V0	???	2017.11.13

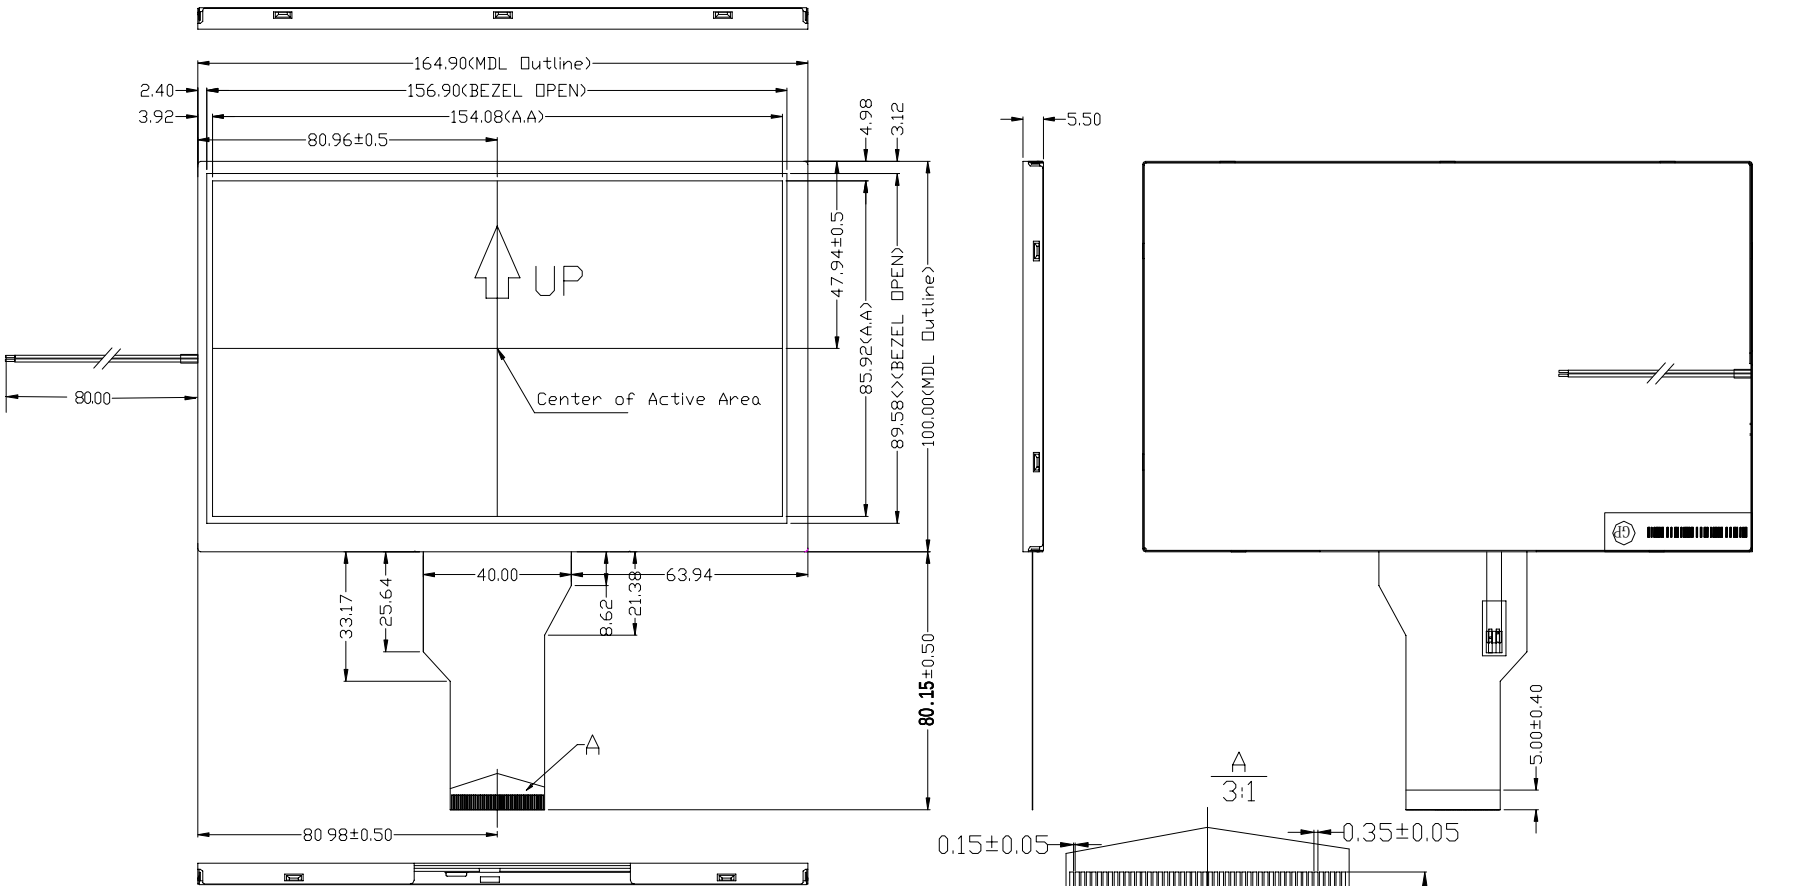

ELECTRICAL-OPTICAL CHARACTERISTICS
(Ta=25° C. The Ambient temperature Ta=25° C)

Item	Symbol	Condition	min.	typ.	max.	Unit
Forward Current	U	If= 180 mA	8.1	9.6	10.8	V
Reverse Current	Ir	Vr= 5 V			10	μA
Power dissipation	Pd	If= 270 mA			2.92	W
Colour Coordinates	X Y	If= 180 mA	--		--	
BL Luminance (Center Area)	Lv	If= 180 mA		TBD		cd/m²
Luminous Uniformity		If= 180 mA	70	75		%
LCM Luminance (reference参考值)	Lv	If= 180 mA	-	300		cd/m²
Operating Temperature Range	Topr	normal use	-10		+60	°C
Storage Temperature Range	Tstg	normal use	-20		+70	°C

CIRCUIT DIAGRAM (LED 3x9=27 dies)

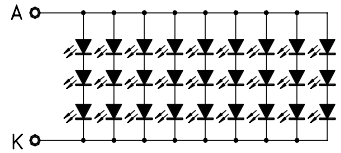

PRODUCT NAME: 产品名称			CUST NUMBER: 客户型号	PROJECTION 三角法	SHEET: 页次 1 of 1	SCALE: 比例 FIT
群创7D长排					APPROVALS 签字	DATE 日期
					DESIGN: 设计	
					CHECK: 核对	
					APPROVE: 批准	