


IC: SPLC792A
 DISPLAY TYPE: FSTN/POSITIVE
 POLARIZER: TRANSFLECTIVE
 VIEWING DIRECTION: 12:00-CLOCK
 DRIVE METHOD: 1/16DUTY,1/4BIAS
 LCM OPERATING VOLTAGE: 3.3v
 OPERATING TEMP: -10 TO 60 Deg.C
 STORAGE TEMP: -20 TO 70 Deg.C
 CONNECTOR: COG
 UNSIGNED TOLERANCE: ± 0.20

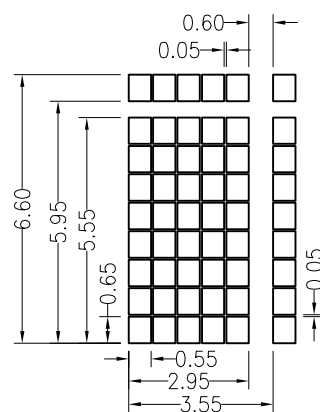

格式(4)