

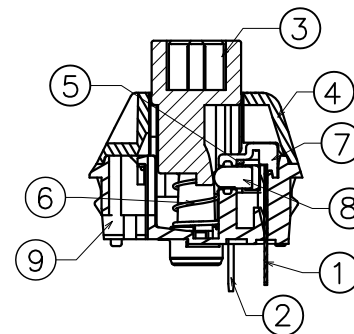
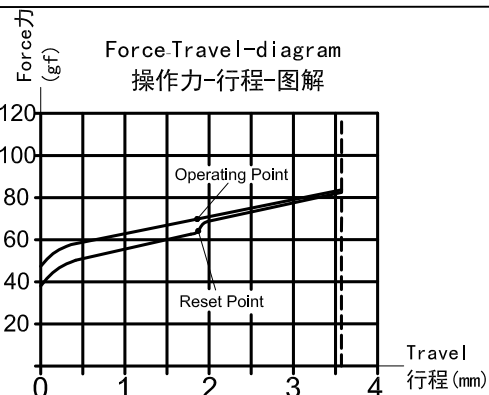


ABIDE BY ROHS






Dark Yellow shaft




■ Specification :

- 1. Rating: 12 VAC/DC max. 2 VDC min.
10mA AC/DC max. 10 μ A DC min.
 - 2. Contact Resistance: 200m Ω Max
 - 3. Insulation Resistance: 100M Ω Min. (DC100V)
 - 4. Withstand Voltage: AC100V (50-60Hz) for 1 minute
 - 5. Operation Force: 70 $\pm$ 10gf
 - 6. Return Force $\geq$ 15gf
 - 7. Conduction travel: 1.80 $\pm$ 0.4mm
 - 8. Total travel: 3.6 $\pm$ 0.3mm
 - 9. Operating Life : 80,000,000 Cycles(min).
 - 10. Degree of protection: IP56(excluding the terminals)
- <Feel is allowed to have difference before and after life test>

■ SWITCH FUNCTION

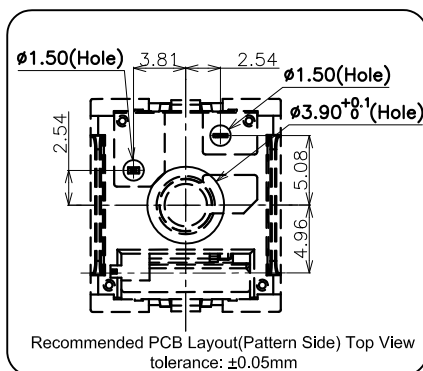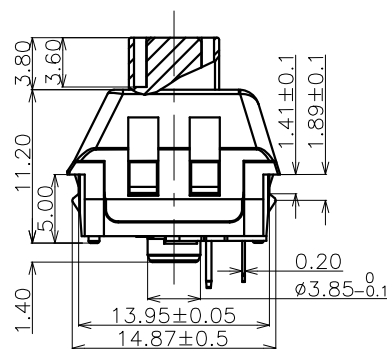

■ Angle of slope of shaft



⑨	Base	—	1	PA66	White	—
⑧	Slider	—	1	POM	Green	—
⑦	Protecting Cover	—	1	PA66	Nature	—
⑥	Spring	—	1	Stainless Steel	Nature	—
⑤	Contact	—	2	Composite gold	—	—
④	Cover	—	1	PC	Nature	—
③	Keystroke	—	1	POM	Dark Yellow	—
②	Static Plate	—	1	Copper Alloy	Nature	—
①	Movable Plate	—	1	Copper Alloy	Nature	—
ITEM	PART NAME	TER'NO	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS

DATE



DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD

DRAWN L.Zhang

2017.06.15

CHECKED

TITLE:

Keystroke Switch(Dark Yellow Shaft)

APPROVALS

PART NO.

CPG1511F01S08

TOLERANCES ARE

30<L ±0.30
10<L≤30 ±0.20
5<L≤10 ±0.15
L≤5 ±0.10

ANGLE

UNIT: mm

SCALE: 1:1

PROJ:

DRAWING NO.

SHEET 1 OF 1

ECN-1904-40	D	2019.05.16	NOTE "②" MATERIAL OF STATIC PLATE CHANGED TO COPPER ALLOY & MODIFIED BASE SHAPE WITH STAMPED ② POSITION	L.Zhang		
	C	2018.08.06	NOTE "①" 1.32±0.02 CHANGED TO 1.30±0.02	L.Zhang		
	A	2017.06.15	NEW	L.Zhang		
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.