







CAD FILE:



NOTE:

1. Material:

Housing: LCP Black;Thermoplastics,UL94V-0(Halogen free)

Contact: Copper Alloy

Shell: Copper Alloy

Back Shell: Ferro Alloy

2. FINISH:

Contact: Gold Flash Plated on Contact Area,

80u" Min.Tin Plated on Solder Tails,

50u" Min.Nickel Underplating Over All.

Shell: 50u" Min.Nickel Underplating Over All.

3. Specification:

3.1: Rating:

Rated voltage:40V AC/DC. Rated current:1.5A Max.

3.2: Electrical:

Insulation Resistance: 100MΩ Min





Contact Resistance: 30 mΩ Max

Dielectric Withstanding Voltage: 500V/AC

3.3: Durability

Mate and Un-mate Connector assemblies for

750 cycles at maximum rated of 200 cycles per hour.

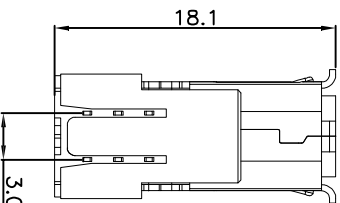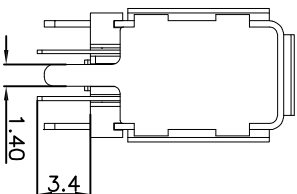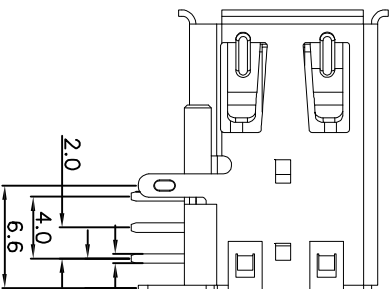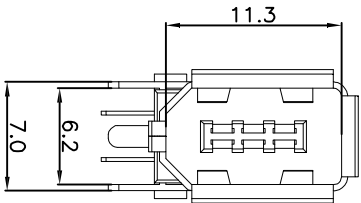

8					TOLERANCE UNLESS SPECIFIED					
7					WITHIN 1.5:±0.1mm OVER 1.5: ±0.2mm ANGLES:±2°					
6						ISSUE	DATE	DESCRIPTIONS	APPL.	
5										
4										
3	SHELL	BRASS	1		TITLE:USB JACK			UNIT:mm	DRWG. NO.:	
2	TERMINAL	BRASS	1		MODEL NO:USB-A-1394C			SCALE:4:1	DWN YC	
1	HOUSING	LCP	1	BLACK					CHK'D	
NO.	DESCRIPTION	MATERIAL	QTY	PLATING	DONGGUAN JINBAOLI ELECTRONICS CO.,LTD				APPL.	LSJ