
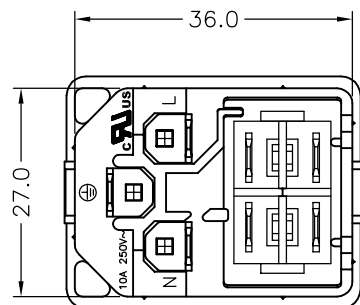
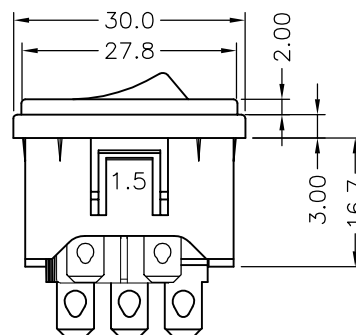
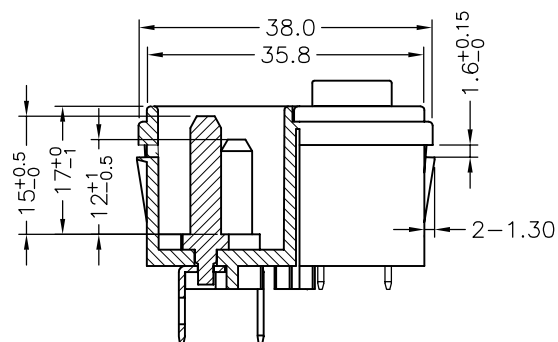


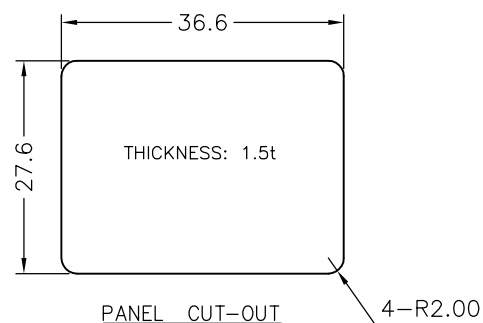


A: MATERIAL:
1.HOUSING:PC, UL 94V-0
2.TERMINAL: COPPER ALLOY, TIN PLATED

B: CHARACTERISTICS:
1.RATING: 10A 250V~
2.INSULATION RESISTANCE : 100MΩ MIN, AT 500V DC
3.ELECTRIC STRENGTH: AC 2,000V FOR ONE MINUTE

C: APPROVALS:
UL, CUL, ENEC & CCC

D: EQUIVALENT CIRCUIT

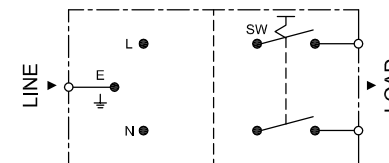

E: NOTE

SOCKET'S TERMINAL	SWITCH'S TERMINAL
Technical drawing of the socket's terminal. Dimensions: $\varnothing 2.8 \times 3.3L$, $\varnothing 1.4$, 10, 4.8.	Technical drawing of the switch's terminal. Dimensions: $\varnothing 2.2$, $\varnothing 1.4$, 8.70, 4.75.

E				TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: .000: ±0.1 .00 : ±0.2 .0 : ±0.3 ANGULAR: ±3°				MATERIAL: SEE ABOVE		SPEC.: IEC 60320-1 C14			
D								APPROVED		CHECKED	DESIGNER	NOTE: DOC.#: S711-00XX	
C													
B													
A	2020.01.13	RELEASE	NEW REVISION	A 4		UNIT mm	SCALE 1 : 1	SHEET 1 of 1					
REV	DATE	DOCUMENT	DESCRIPTION										