




EVER GRAND




DC FAN ED6020 SERIES

DIMENSIONS DRAWING

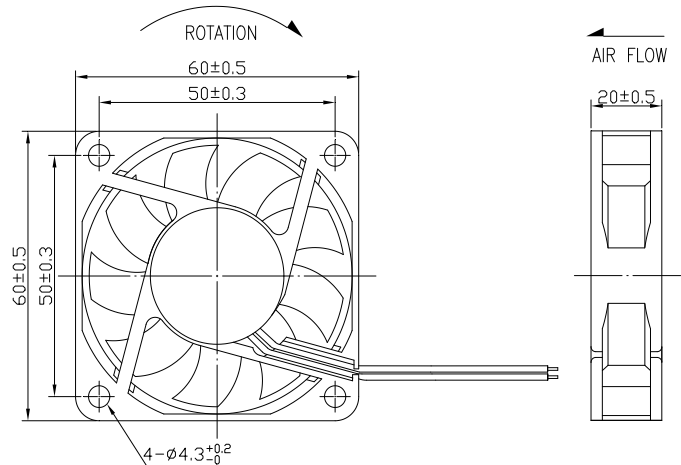

P&Q CURVE (AT RATED VOLTAGE)

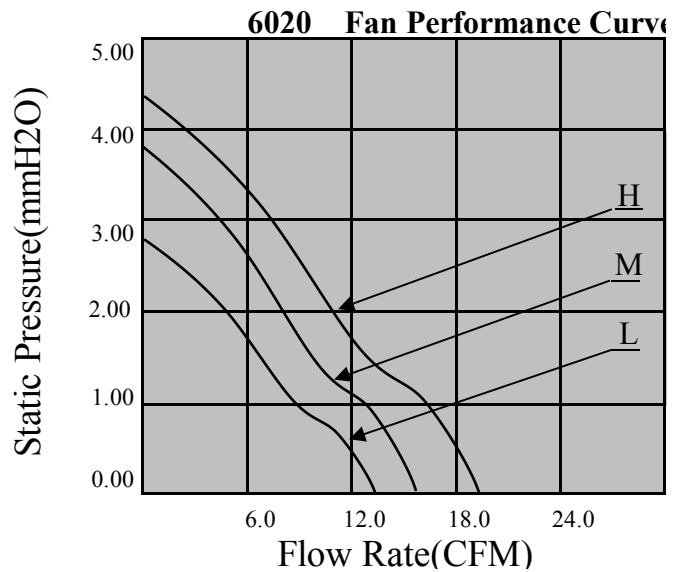

- *Material:housing/impeller: plastic UL94-V0
- *Operating Temperature:-10°C-70°C(35%-85%RH)
- *Storage Temperature:-40°C-70°C(35%-85%RH)
- *Lead wire:UL Tyne# 26AWG

Model	Bearing	Code	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
PART NO.			VDC	VDC	Amp	Watt	RPM	CFM	mmH ₂ O	dBA	g
ED6020S(B)05H	B.S	H	5	4.0-5.5	0.35	1.75	5000	18.24	4.65	28.32	48
ED6020S(B)05M	B.S	M		4.0-5.5	0.27	1.35	4000	16.08	3.92	26.88	
ED6020S(B)05L	B.S	L		4.0-5.5	0.23	1.15	3000	13.28	2.74	23.3	
ED6020S(B)12H	B.S	H	12	10.8-13.2	0.23	2.76	5000	18.24	4.65	28.32	
ED6020S(B)12M	B.S	M		10.8-13.2	0.18	2.16	4000	16.08	3.92	26.88	
ED6020S(B)12L	B.S	L		10.8-13.2	0.13	1.56	3000	13.28	2.74	23.3	
ED6020S(B)24H	B.S	H	24	12-27.6	0.18	4.32	5000	18.24	4.65	28.32	
ED6020S(B)24M	B.S	M		12-27.6	0.13	3.12	4000	16.08	3.92	26.88	
ED6020S(B)24L	B.S	L		12-27.6	0.09	2.16	3000	13.28	2.74	23.3	

*Function type is optional.

*The max air flow and the speed are measured in free air ;max .airpressure is measured at zero air flow.

*Noise is measured in anechoic chamber in free air ,one meter from intake side.

*All readings are typical values at rates voltage.

*Specifications are subject to change without notice.

