


STX-N92 VER1.0

From view

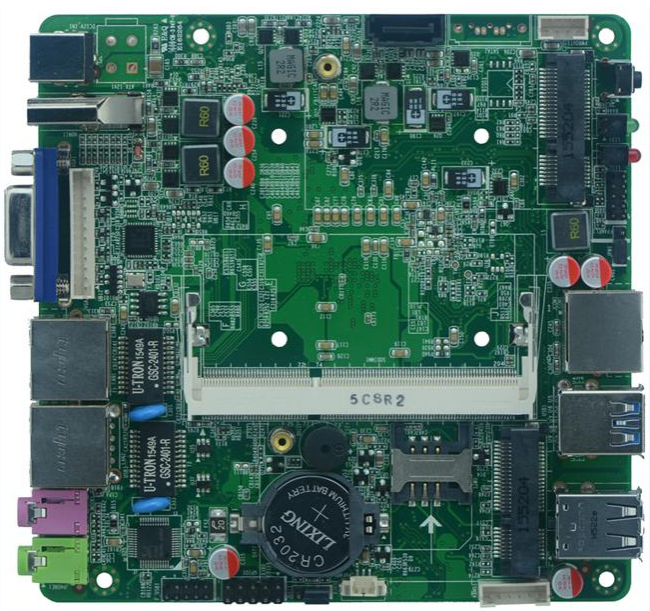

Model NO.	STX-N92 VER:1.0
CPU	Integrated,Intel®Haswell-U I3-4005U/4010U Dual-core four threads CPU,TDP is 15W
Chipset	Base on Intel®Haswell-U SOC
Memory	1*SO DDRIII RAM slot,Only support 1600/1333MHz DDR3L/1.35v RAM ,Max up to 8GB
Graphic	Integrated,Intel®HD Graphics 4400
	Support 1*VGA,1*HDMI
	Support VGA;HDMI Synchronous / asynchronous display
LAN	2* RTL8111F Gigabit network card chip (optional to do a network card), support network to wake up the /PXE function
Storage	1* MSATA SSD
	1* SATA
Audio	Integrated ALC662 6 Sound track high fidelity audio controller,Support MIC/Line-out
Expansion Slot	1* Mini-PCIE slot, support WIFI/3G module
	1* MSATA Support SSD/WIFI(Default SSD),SSD Transfer rate up to 3Gbps
Rear I/O	6* USB port (1*USB3.0 port,And USB2 is alternative with LAN2)

	1* HDMI port
	1* VGA port
	2* gigabit LAN RJ-45 interface (Optional to make a network card, where USB2 alternative to LAN2)
	1* Line out(Green),1* MIC (Purple)
	1* CISCO Standard COM
	1* open Button
	1* 12V DC JACK input
Internal I/O	1* JVGA1(1*12pin) the same signal with DB15
	1* RS232 COM port (the same signal with DB9)
	2* USB2.0 port(2*5pin,and USB2 optional)
	1* PS/2 Mouse and keyboard interface(1*6Pin)
	1* SIM slot
	1* Hard disk power supply interface
	1* Front panel function button and indicator light interface(2*5pin)
	1* 4pin ATX 12V input/out put power supply
Fan	Support Fanless ,And there is 1* CPU Fan 3pin as backed up
GPIO	1* GPIO (Support 4-way GPIO function)
BIOS	AMI 64Mb Flash ROM
Watchdog	Support hardware reset function (L256, 0~255 seconds)
Power Input	DC_12V Single power supply
Operating Temp.	-10℃～60℃
Storage Temperature.	-20℃～70℃
Humidity	5%-95%(relative humidity; non-condensing)
Dimension	120mm x 120mm

Order information:

No.	Model NO.	CPU	Memory	Display	HDMI	LAN	USB	COM	RS485/422	Power supply
1	STX-N92 VER:1.1	I3-4500U	1*SOD DR3L	VGA	1	1	6	6	/	DC/12V
2	STX-N92-2L VER:1.1	I3-4500U	1*SOD DR3L	VGA	1	2	6	6	/	DC/12V

