

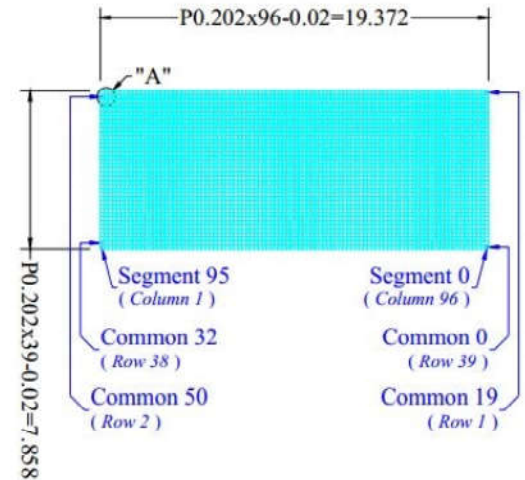
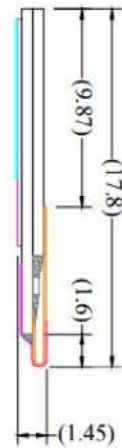
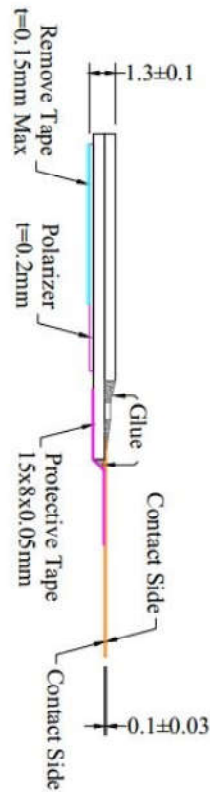


Item	Date	Remark
A	20101108	Original Drawing
B	20101229	Modify Pin Define

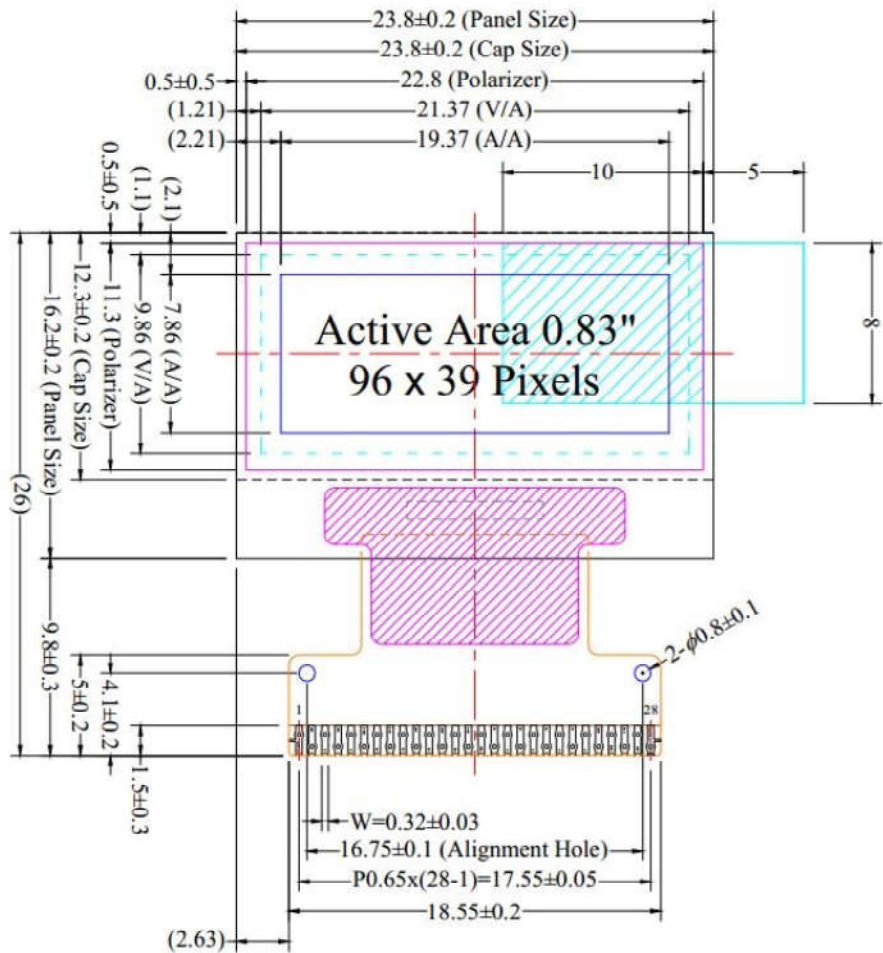

Pin	Symbol
1	N.C. (GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VDD#
7	VSS
8	VDD
9	BS1
10	BS2
11	CS#
12	RES#
13	D/C#
14	R/W#
15	E/RD#
16	D0
17	D1
18	D2
19	D3
20	D4
21	D5
22	D6
23	D7
24	IREF
25	VCOMH
26	VCC
27	VLSS
28	N.C. (GND)

- Notes:
- Color: Light Blue/White
 - Driver IC: SSD1306
 - FPC Number: UT-0206-P13
 - Interface: 8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
 - General Tolerance: ±0.30
 - The total thickness (1.40 Max) is without polarizer protective film & remove tape. The actual assembled total thickness with above materials should be 1.65 Max.