



Category

SWITCH

- ANTI-VANDAL SW
- ROCKER SW
- PUSH SW
- TOGGLE SW
- MICRO/DETECTOR SW
- SLIDE SW
- ROTARY SW
- DIP SW
- TACT SW
- LIGHTED TACT SW
- KEYLOCK SW
- CAPACITANCE SW
- PRESSURE SW
- SAFETY & CONTROL SW
- VEHICLE SW
- THERMOSTAT SW
- TRIGGER SW
- BATTERY SW
- **CK series**

SOCKET

WIRE HARNESS

BREAKER

FUSE HOLDER

FUSE

ENCODER

INDICATOR

POTENTIOMETER

CONNECTOR

WATERPROOF PARTS

NEW PRODUCT

Products Search

Search



OUR PRODUCT

[Home](#) » [Our Product](#) » [CK series](#) » [CK series](#)

/ SWITCH

CK series
Sub-miniature Slide Switch, SMD or Through-hole Mounting

Mini slide switch for DC application
0.3A DC6V rating
SMD or through hole terminals
1P2T, 1P4T, 2P2T & 2P3T functions

[PDF Download](#) [Get Information](#)

[Print this page](#)




ZOOM IN


Feature

- Rating: 0.3A DC 6V
- Contact resistance: 70mΩ Max.
- Insulation Resistance: 100MΩ Min.
- Dielectric strength: 250VAC
- Operating temperature: -16 to +60°C
- Life: 10K cycles
- Application: Computer peripherals, network, telecommunication products & test equipment


Specification

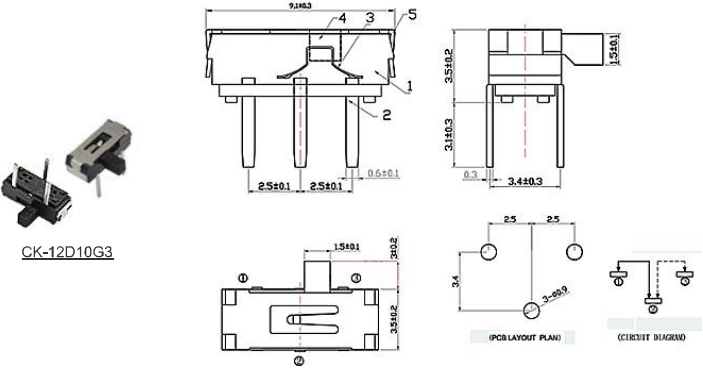

CK-12D10G3

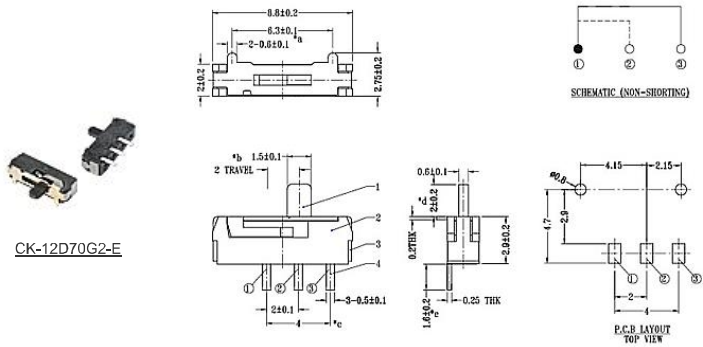

CK-12D70G2-E

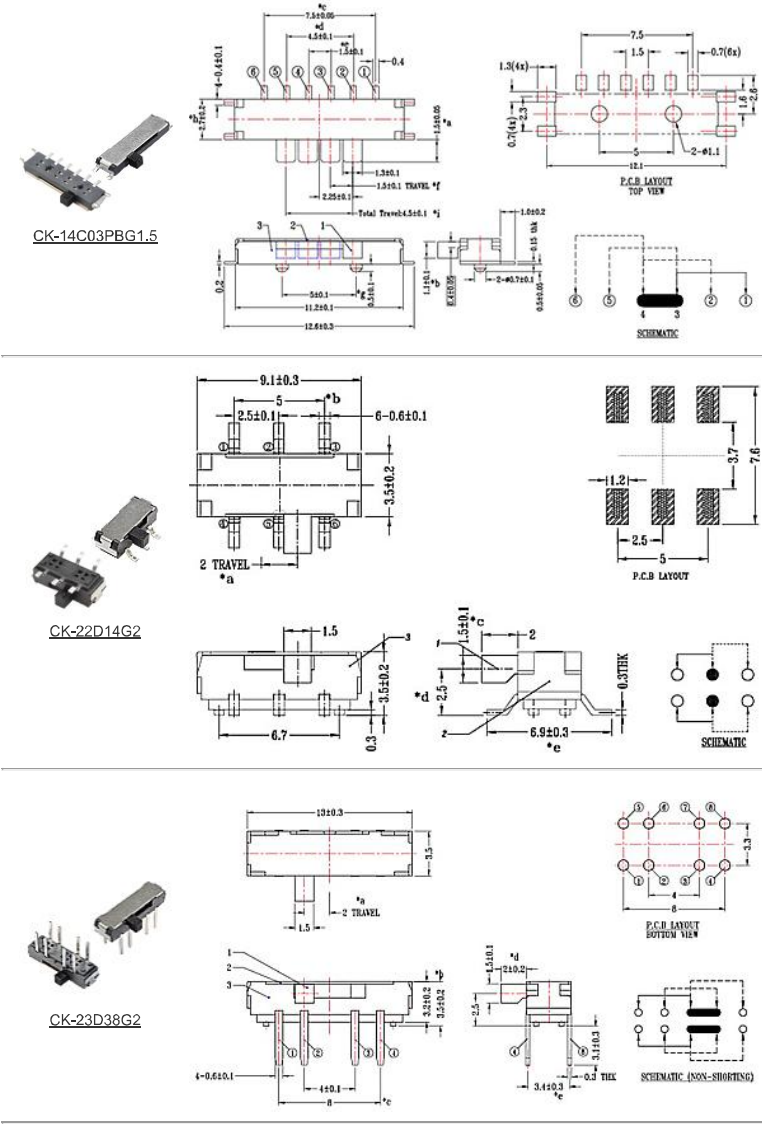

BACK



5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.

Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved