



Customer Approve By

REV	DESCRIPTION	MODIFY BY	DATE
AO	1 ST DESIGN	LZZ	2021-12-27

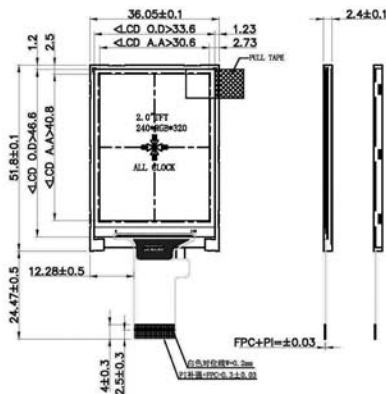


FPC展开示意图
FPC展开出货

PIN FUNCTION:

PIN	DESC
1	LEDA
2	LEDK
3	NC
4	NC
5	NC
6	IOVCC
7	D7
8	D6
9	D5
10	D4
11	D3
12	D2
13	D1
14	DO
15	RD
16	WR
17	RS
18	CS
19	TE
20	RESET
21	GND
22	GND

Note: RoHS

- Display Mode: $2.0''$ TFT/IPS
- Driving Condition: VDD=2.8V
- Viewing Direction: ALL
- Operating Temp: -20°C ~ $+70^{\circ}\text{C}$
- Storage Temp: -30°C ~ $+80^{\circ}\text{C}$
- LCD: S17789V2
- IC: WHITE LED*3
- Backlight: WHITE LED*3
- Unspecified tolerance is $\pm 0.20mm$
- RoHS Request



Module NO. GVH0200QV17B	 深圳金视界光电科技有限公司 SHENZHEN GOLDEN VISION OPTOELECTRONIC CO., LIMITED		SHEET	1
	DESIGNED	CHECKED	APPROVED	FILE NAME
	UNIT mm	SIZE A4	SCALE N-T-S	Count Dwg.