

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2010-05-24

Technical Data

Material:

Contact Material: Brass

Insulator Material:Black Polyester UL94V-0

Standard:PBT or PA6T +30%G.F

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage:500V AC/minute



Mechanical:

Operating temperatures: Gold Plated:-55° C to+105° C

Tin plated:-40° C to+105° C

Soldering temperature: +220° C, 10s max(PBT).

+260° C, 10s max(PA6T).

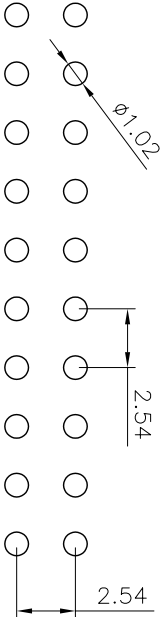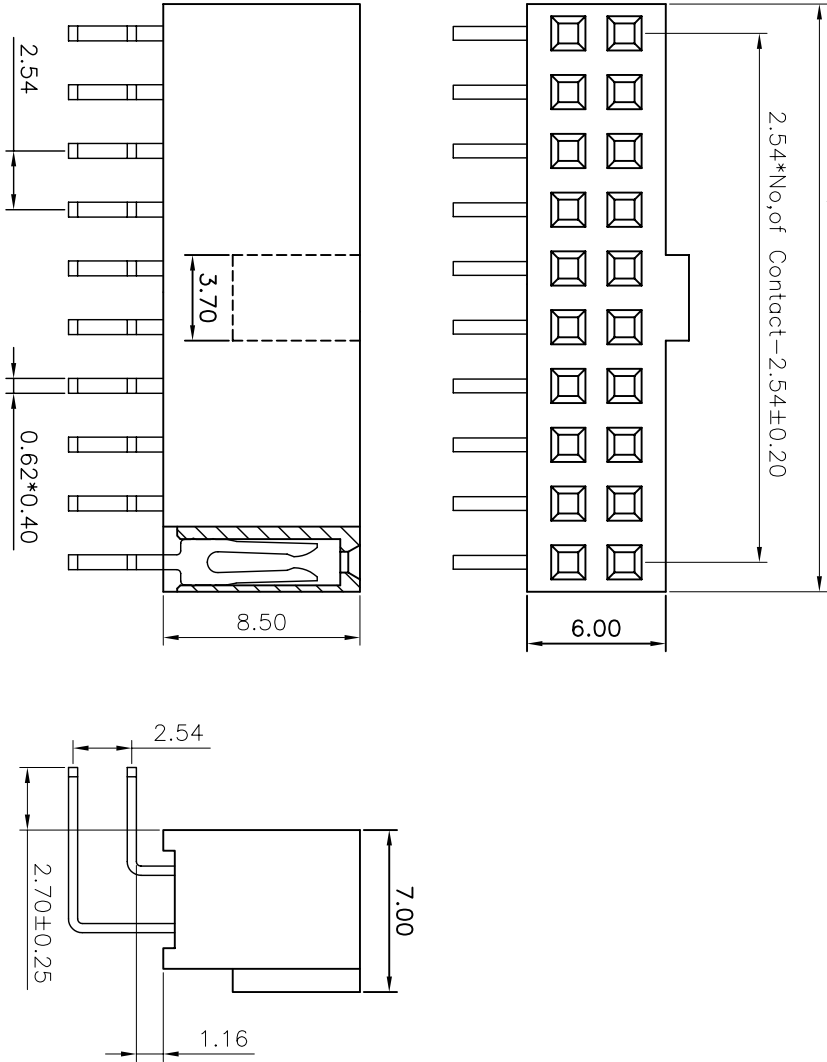

P.C.B LAYOUT

ANYCONN® 东莞市精捷电子有限公司

DONGGUAN ANYCONN ELECTRONIC CO.,LTD

TOLERANCE		PROJECTION		TITLE:	
ANGLE	± 5°			PH2.54 H8.50mm Right Angle Dual Row	
X.XXX	± 0.10	DATE :	2010-05-24		
X.XX	± 0.20	DRAWN :	Heguangfeng	PART NO: F13912XXXXXXNA01	Female Header
X.X	± 0.30	CHECKED :		DRAWING NO:	
X.	± 0.50	APPROVED :		REV: A0	UNIT: mm SCALE: 3:1 SIZE: A4