


DS-12B-L


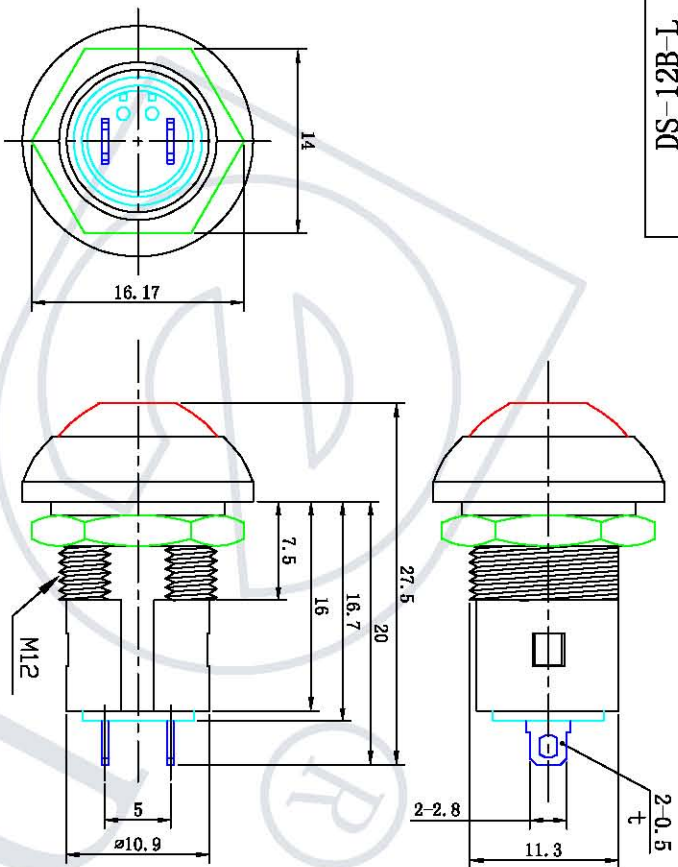


SPECIFICATIONS


1. Contact Rating: 2A @ 36V
2. Electrical Life: 50,000 cycles
3. Contact Resistance: 50m-ohms max (initial)
4. Insulation Resistance: 1,000M-ohms min @ 500VDC
5. Dielectric Strength: 2,000V RMS 50 ~ 60Hz
6. Operating Temperature: -40° C ~ +85° C
7. Switch function : 1NO latching
8. IP Class: IP67 Protection
9. Torque: 5 ~ 14Nm max. applied to nut
10. Operating Force: 5N max

MATERIALS

1. Button: PBT
2. Bushing & Bezel: PC
3. Base: PBT
4. Contact : Silver, Gold Plated
5. Nut : Nickel plated brass



安裝面板 PANEL CUT-OUT



按钮开关

Yueqing Daier Electron co., Ltd

Push Button Switch

DS-12B-L

