
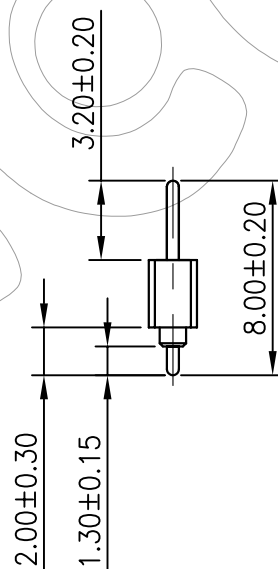
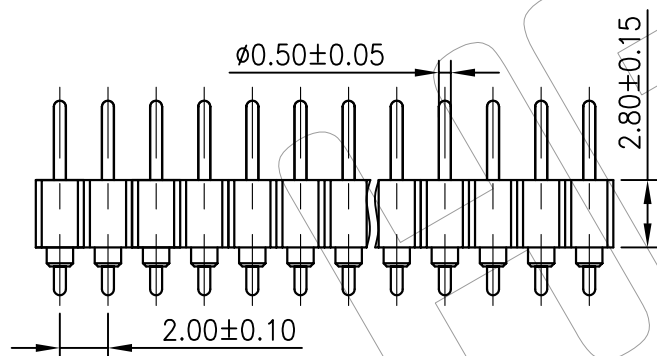


RoHS

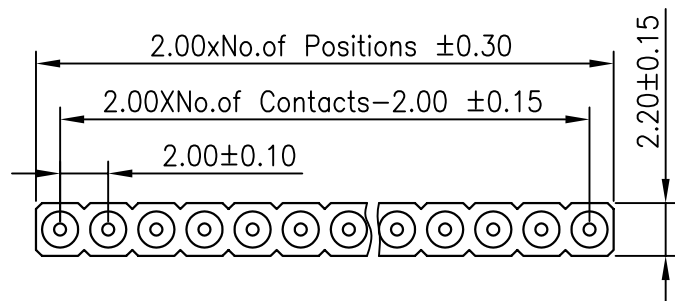

Materials
Pin:Brass,machined, (H59-3)
Plating:Gold plated:1.25u"m/50u"nickel,full gold
Insulator body(black):PPS(UL94V-0)

Electrical
Current rating:2 Amps/contact max.
Contact resistance:20mΩ
Insulation resistance:1000MΩ
Operating voltage:60 AC/DC

Mechanical
Operating temperature :Gold plated:-55°C to +105°C
Soldering temperature:260°C,10s max

Ordering Information

HC-MP5 28 1 XX S XX 080 01

Insulator Type Code
1: Single row

No.of Pins
1x40Pins

Contact Plating
SN: Tin
G0: Gold Flash
G2: 2U"Gold
G3: 3U"Gold
G4: 5U"Gold
G5: 10U"Gold
S0: Gold Flash/Tin
Standard: G0

Pin Length
080=8.0mm

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-MP5281XXSXX08001

TITLE:

2.00x2.8mm Machine Pin Header Straight
L=8.00

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9