


B75SL VER1.0


Front View



IO Front View

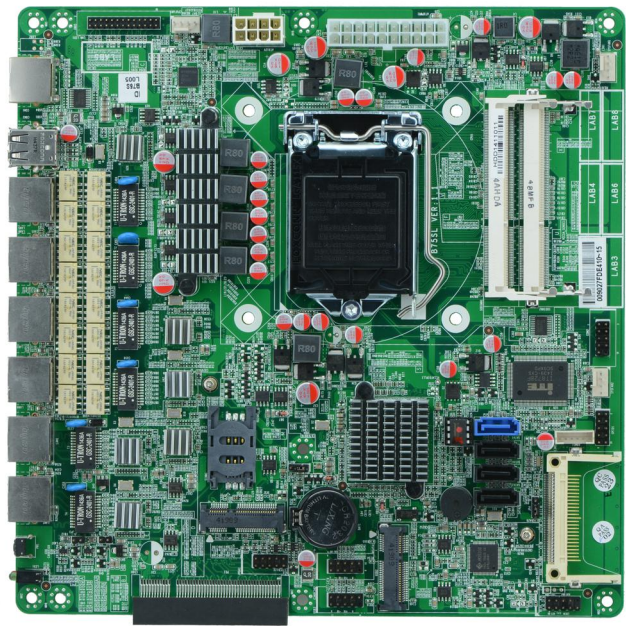

IO Side View

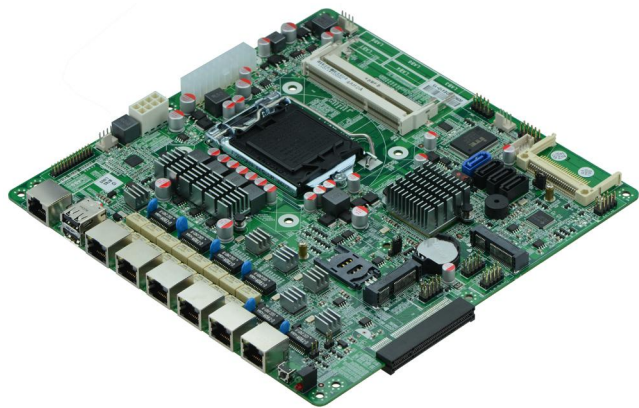

Model NO.	B75SL VER1.0
CPU	Support LGA1155 Intel® Core™ i3/i5/i7 Pentium 22nm/32nm Core processor
Chipset	Intel® B75 High-Speed chipset
Memory	2* SO DDR3, Support 1600/1333MHz,Up to16GB
Display	Integrated Intel®HD Graphics
LAN	6* 82574L Intel Gigabit network card chip, support network wake-up /PXE function 2*BYPASS (Management 12 and 34 Lan)
Storage	3* SATAIII 1* SSD MSATA 1* 52pin CF
Expansion Slots	1* 8X PCIE, Gigabit Gigabit fiber port can be expanded
Rear I/O	2* USB2.0 6* RJ-45 1* RJ45-DB9COM (CISCO standard definition) 1* LED indicating power and hard drive indicator 1* Touch button
Internal I/O	1* JVGA1(2*5pin) 1* COM (2*5pin)

	1* LAN_LED 2*13pin
	4* USB2.0(2*5pin)
	1* PS/2(1*6Pin)
	1* FP1(2*5pin Front panel buttons and LED connected)
	1* ATX_20P 1U
Fan interface	1* CPUFAN 4pin;2* SYSFAN 4pin
GPIO	1* GPIO (Support 4-way GPIO function)
BIOS	AMI 32MB Flash ROM
Watchdog	Support hardware reset function (L256, 0~255 seconds)
Power Input	ATX Power input
Operating Temp.	-10℃～60℃
Storage Temp.	-20℃～70℃
Humidity	5%-95%(relative humidity; non-condensing)
Dimension	220mm x 220mm

Order information

No.	Model No.	CPU	Memory	Display	LVDS	LAN	USB	COM	BYPASS	Power
1	B75SL VER:1.0	LGA1155	2*SODDDR3	1*VGA	X	6*82574L	6	2	2 Group	ATX
2	H67SL VER:1.2	LGA1155	2*SODDDR3	1*VGA	X	6*82583V	6	2	X	ATX