



REV.	DESCRIPTION	REVISER	DATE
A0	First issue	WZQ	2020.12.07

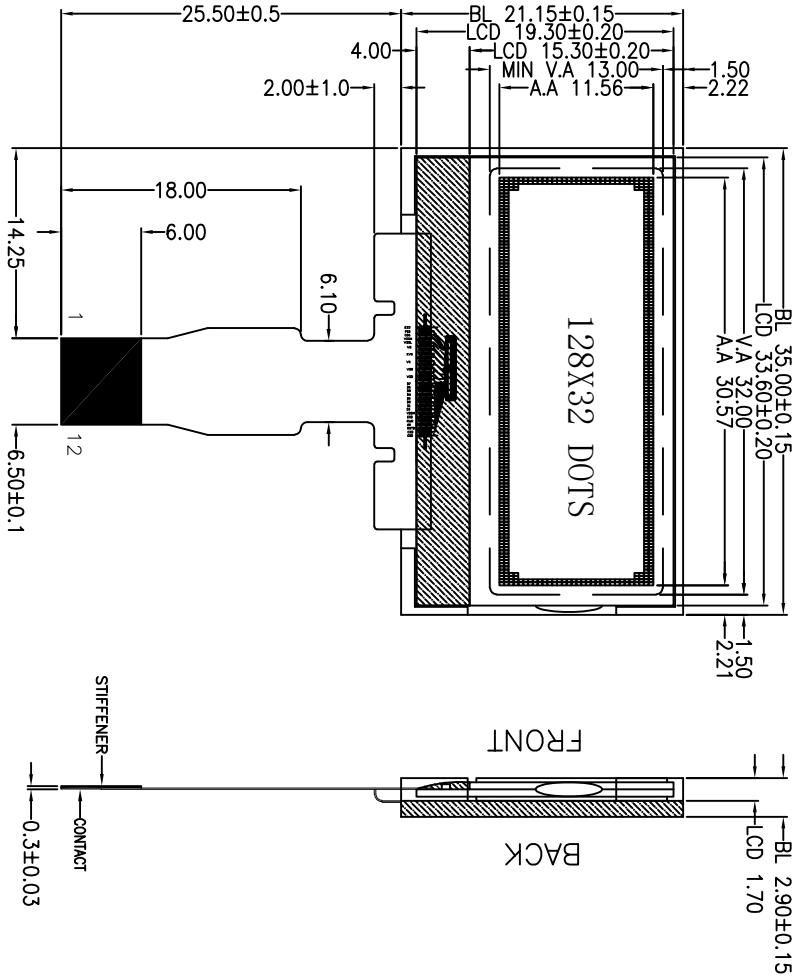


PIN	SYMBOL
1	V _G
2	X _{Y0}
3	V _O
4	V _{SS}
5	V _{DD}
6	S _{DA}
7	S _{CK}
8	A ₀
9	R _{STB}
10	C _S
11	L _{PD-K}
12	L _{PD-A}



2.8V, 30mA;

BACKLIGHT CIRCUIT

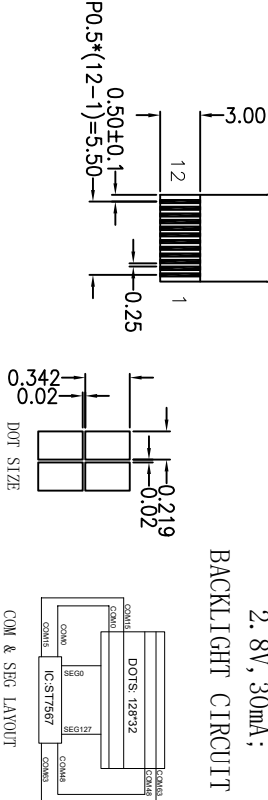

Specifications:

1. Display Mode: FSTN/Transmissive/Positive.
2. Viewing Angle: 6 0' clock.
3. Drive Method: 1/33 Duty, 1/6 Bias, Vop=8.4V, Vdd=3.0V.
4. Top: -20° C~+70° C, Tst: -25° C~+80° C.
5. Connector: COG+FP.C.
6. Drive IC: ST7567
7. Backlight: 2Pcs Green LED
8. With * " Mark Dimensions Are Important Dimensions.

深圳市佳显电子技术有限公司

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODEL NUMBER:	PROJECTION	SHEET:	1 OF 1
DESIGN BY:	WZQ	2020.12.07		SJXD12832-143			
CHECKED BY:							
APPROVED BY:				DO NOT SCALE THIS DRAWING.		DATE:	2020.12.07