
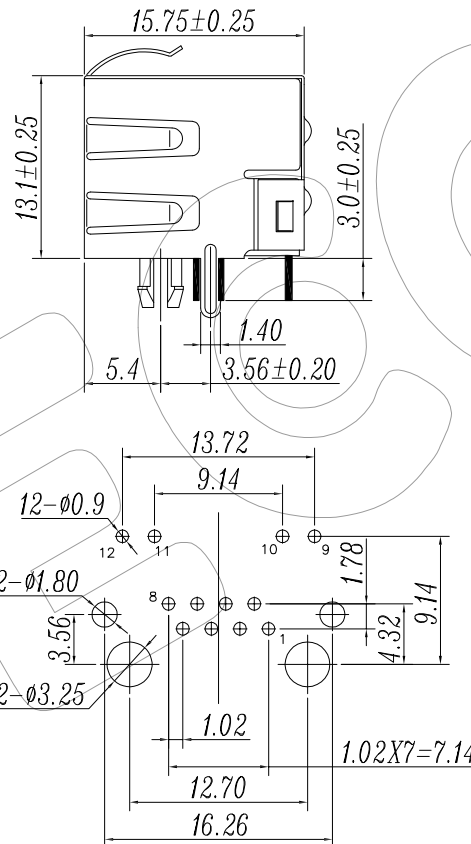
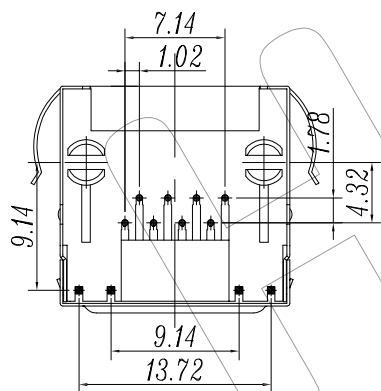


RoHS

MECHANICAL:

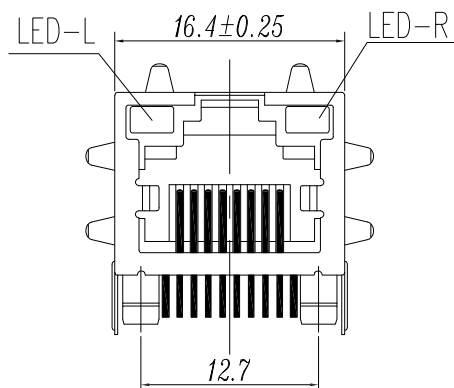

PC Board Layout
Top View

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

1. SHIELD: BRASS T=0.2MM/ Finish 30u" Nickel
2. HOUSING /INSERT MATERIAL: THERMOPLASTIC, PBT UL94V-0, COLOR BLACK
3. CONTACT MATERIAL: PHOSPHOR-BRONZE φ0.46MM
4. PLATING: GOLD PLATING OVER NICKEL, PLATED NICKEL 30~50U". GOLD PLATED ON CONTENT AREA FU/3U/6U/15U/30U/50U"
5. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40. C TO +85. C
2. OPERATION: -40. C TO +85. C

Part Number:
HC-HR5622SF-1188 X X B-X X-1 R-KC

Electroplating:

0=FU 金 1=1U 金 2=2.5U 金
3=3U 金 4=6U 金 5=15U 金
6=30U 金 7=50U 金

Material:

1=PBT 2=PA46
3=PA66 4=PA9T 5=LCP

Colour:

B=黑色 G=绿色 R=红色 Y=黄色
V=紫色 W=白色 H=灰色 L=蓝色

environmental protection:
R=Rohs Free
H=Halogen Free

Packing:
1=Tray
2=Tape Reel

LED polarity:

1=+/- +/- 2=+/- -/+ 3=-/+ -/+
4=-/+ +/- 左边 6=+/- 右边

LED Colour:

W/O LED Z	RIGHT LED					
	YELLOW	GREEN	ORANGE	GO	GY	BLUE
LEFT LED	1	2	3	4	5	6
	7	8	9	A	B	C
	D	E	F	G	H	J
	K	L	M	N	P	Q
	R	S	T	U	V	W
		Y				

LED ELECTRICAL CHARACTERISTIC

Yellow

Green

12-Ø11

10-Ø9

LEFT LED

RIGHT LED

Standard LED	Wavelength	Forward V (Min/Max)	Forward A	Type
Green	568nm	1.8V/2.8V	20mA	squareness
Yellow	585nm	1.8V/2.8V	20mA	squareness
Orange	610nm	1.8V/2.8V	20mA	squareness

OPERATION		DRAW	Lu jin ying	SCALE	FIT	PART NO.	
X.X	±0.30						
X.XX	±0.20	CHECK		UNIT	mm	HC-HR5622SF-1188XXB-XX-1R-KC	
X.XXX	±0.10						
Angle	±3°	APPROVE		SHEET	1/1	TITLE: Shielded RJ45 Modular Jack, Through Hole Type, with LED, 1x1Ports	
DIM	TOL						

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

A0	2023.09.15	NEW DRAWING	
REV	DATE	MODIFICATION DESCRIPTION	
CHANGE			