



Small blind area, accurate measurement

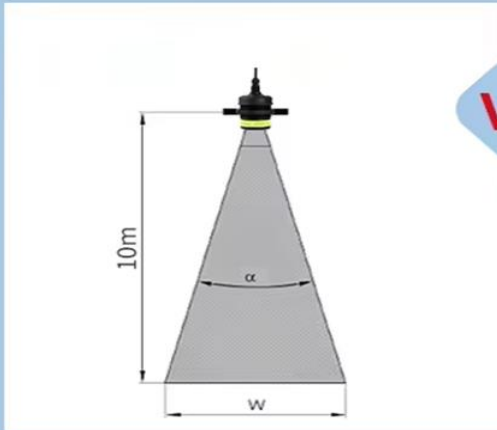

VS

Others: $\leq 300\text{mm}$

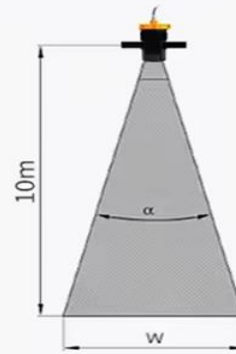

Wide range power supply, strong applicability



VS

Others: 24VDC



High waterproof grade, suitable for harsh environment



VS


Others: IP66




NEW!

ULTRASONIC LEVEL SENSOR

- Small blind area: $\leq 150\text{mm}$
- Low power consumption: $<100\text{mA}$
- Wide range power supply: $10\text{-}30\text{VDC}$

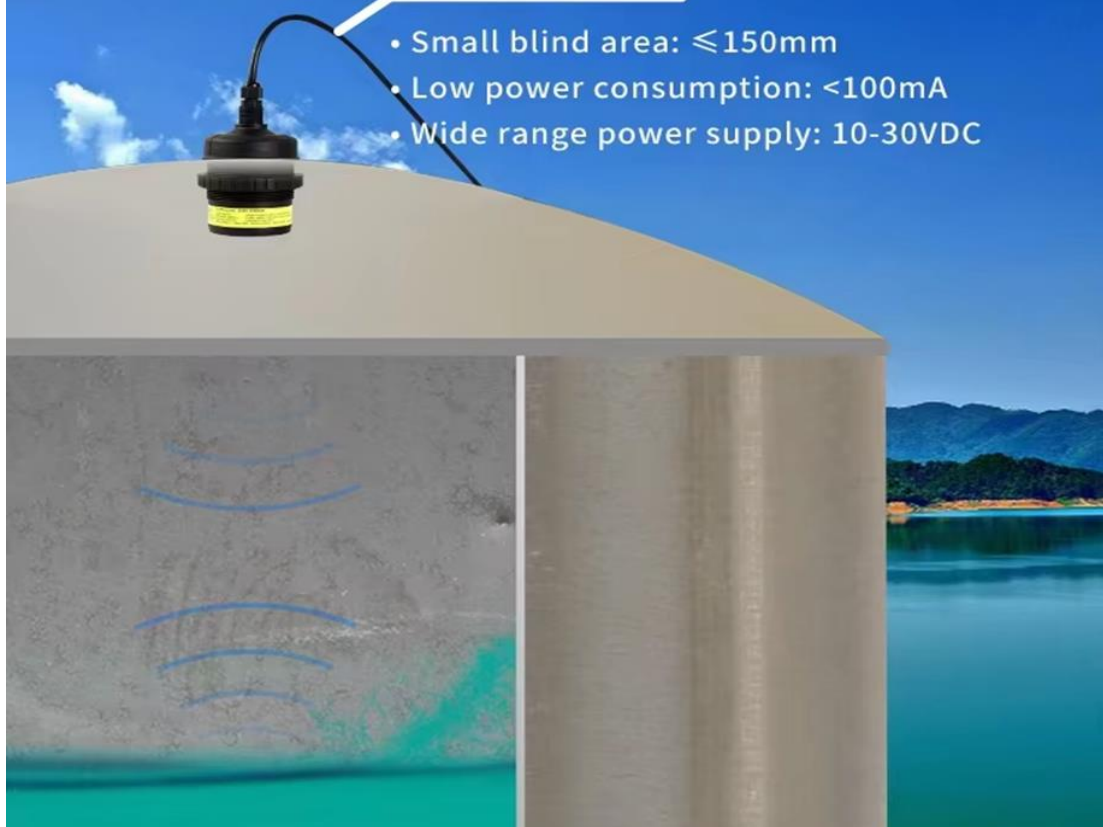

RS485+4-20mA or RS485+0-5V

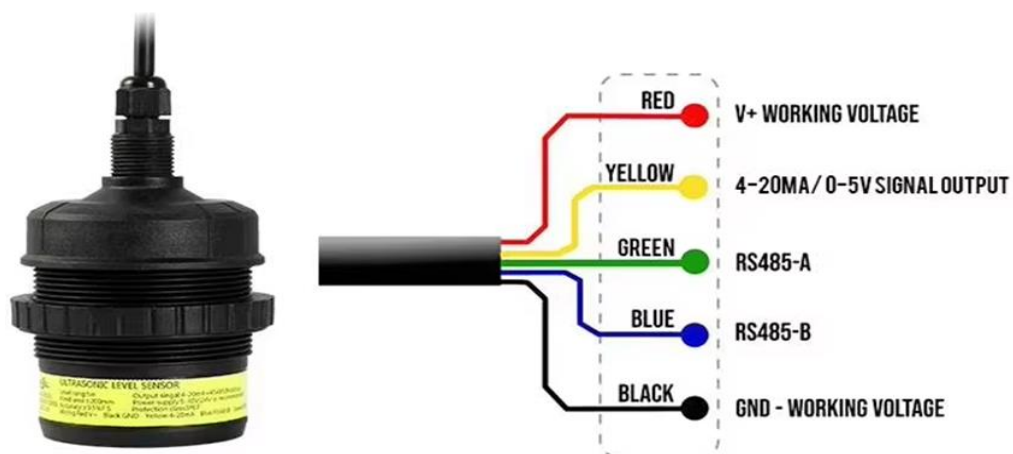

strongfirst.com.cn