





- ❖ High-strength aluminum alloy shell with painting-treated surface
- ❖ Precisely mechanical analyzed big spindle and silent tubular motor with great torque make ensures a stable lifting and smooth performance
- ❖ Specially designed knob tension controllers prevent the screen from deformation caused by temperature difference
- ❖ Multi-functional installation hanging bracket are available in any occasion with easy and quick operation
- ❖ Wire control, central control, wall control, touch triggering, infrared remote control and wireless control are available
- ❖ Screens like front fabric, back fabric, sound penetration fabric and others are optional for customers


Control guidance

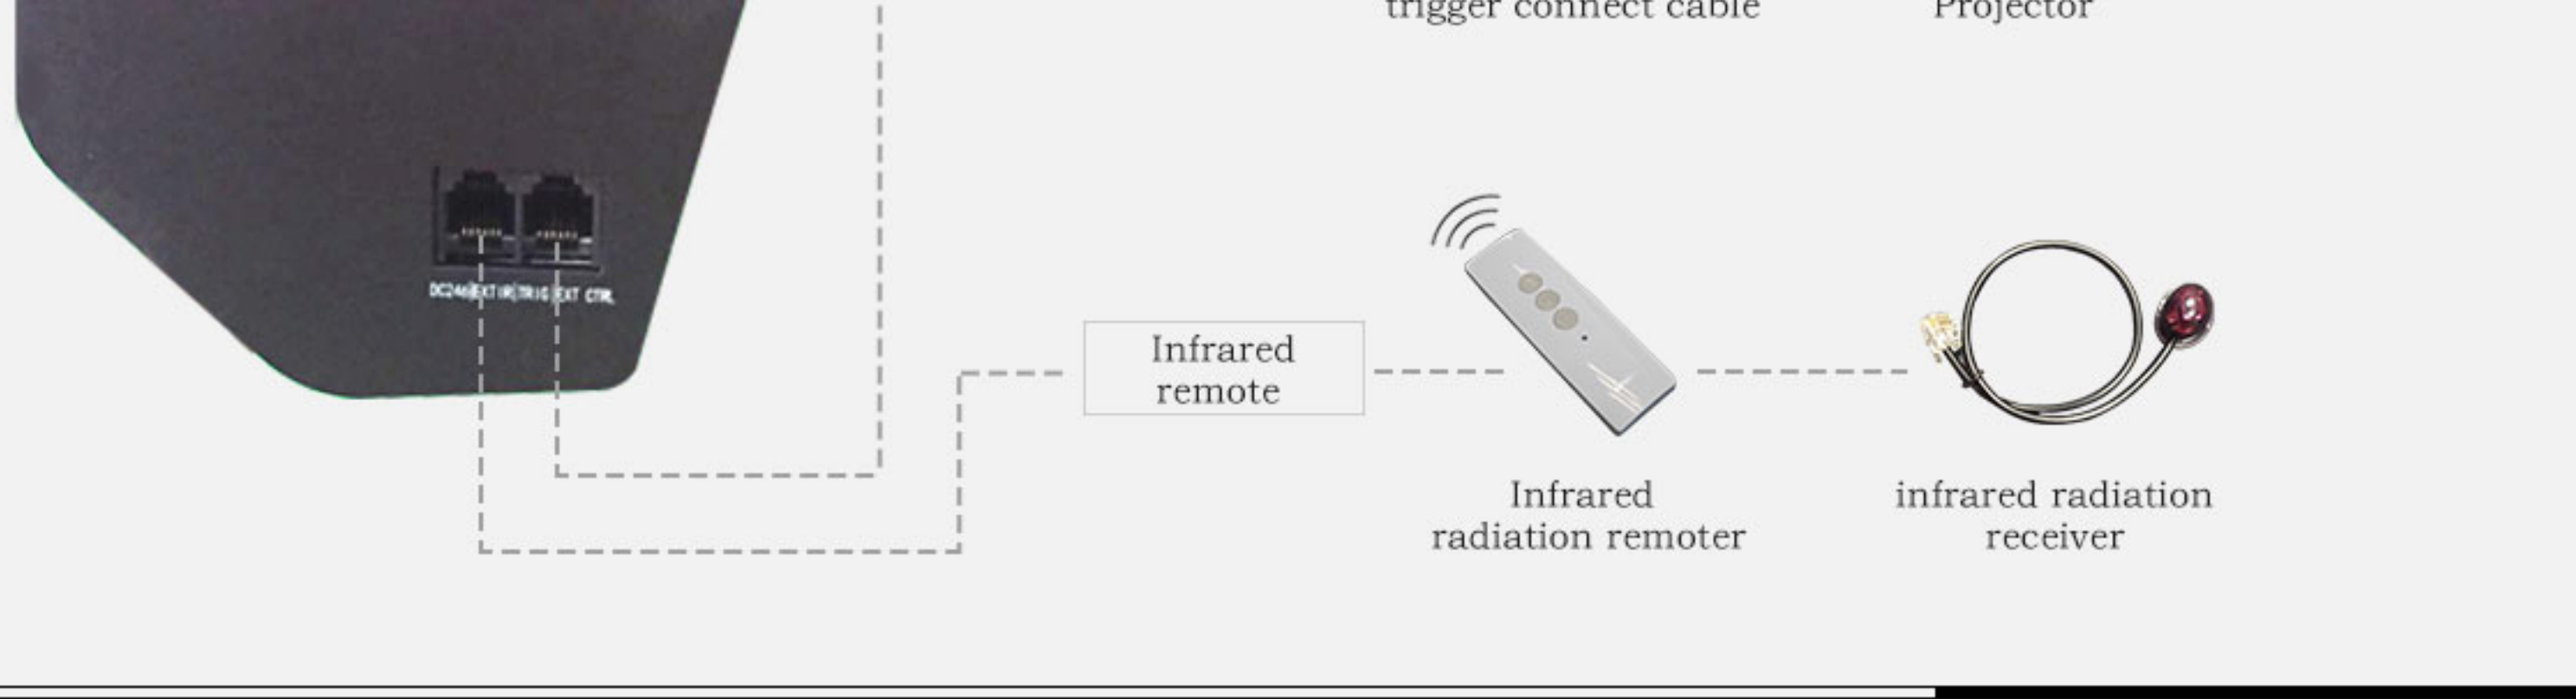

Wiring guidance

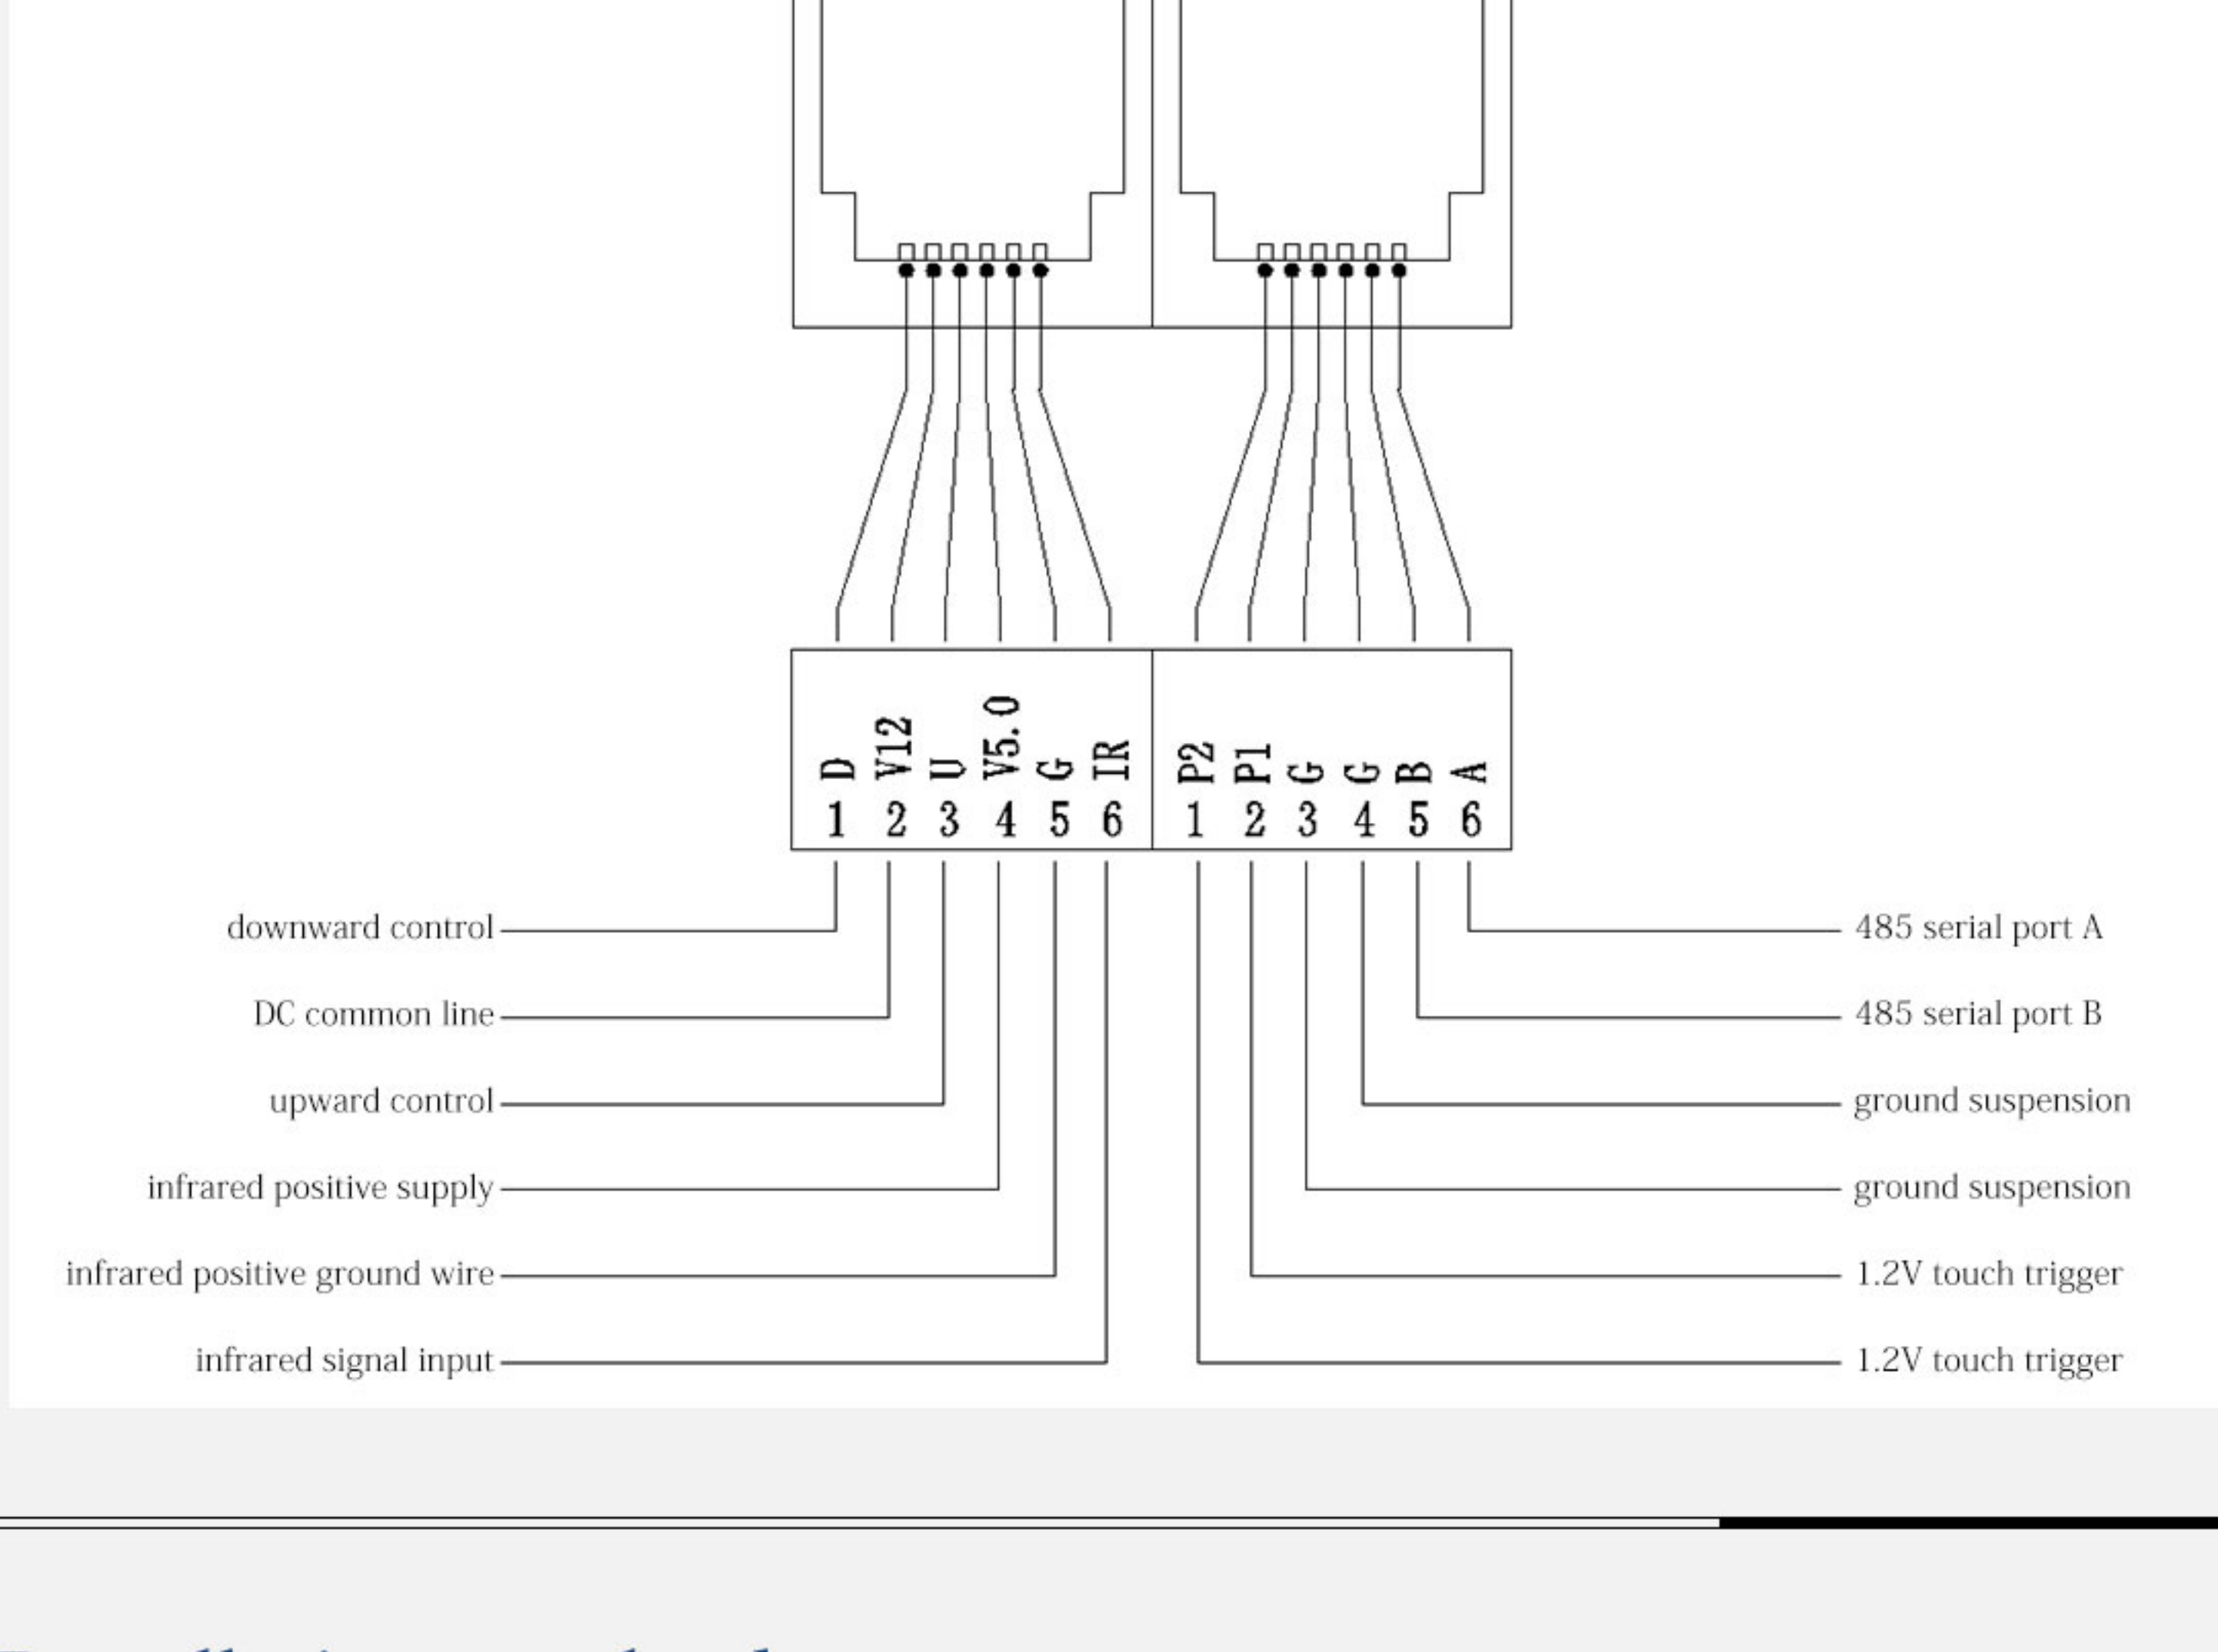


Installation method

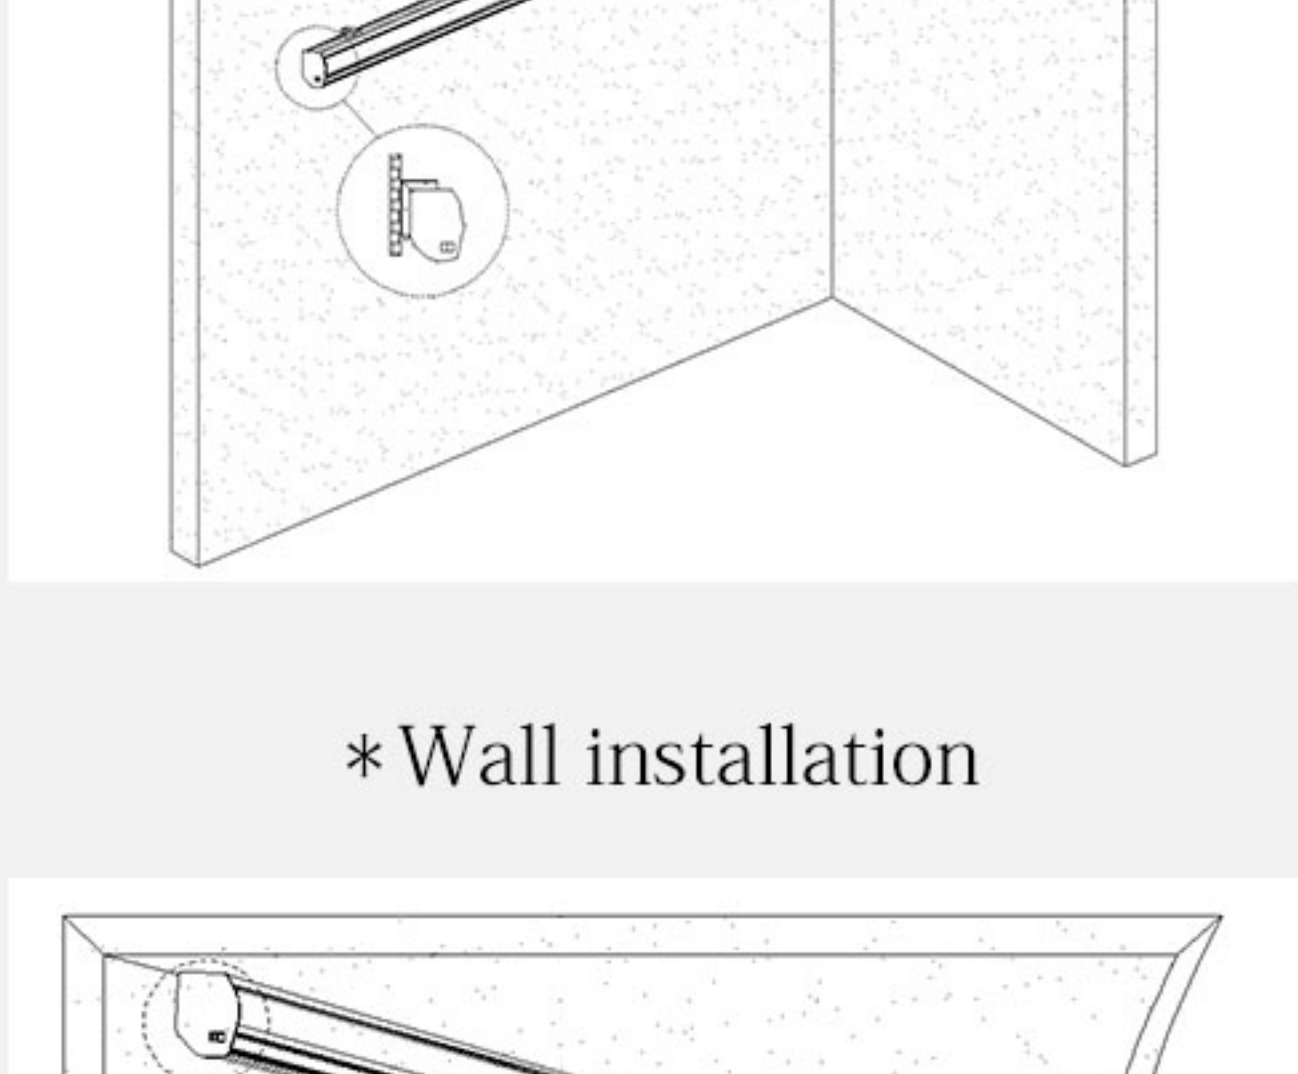


* Wall installation




* Hanging installation

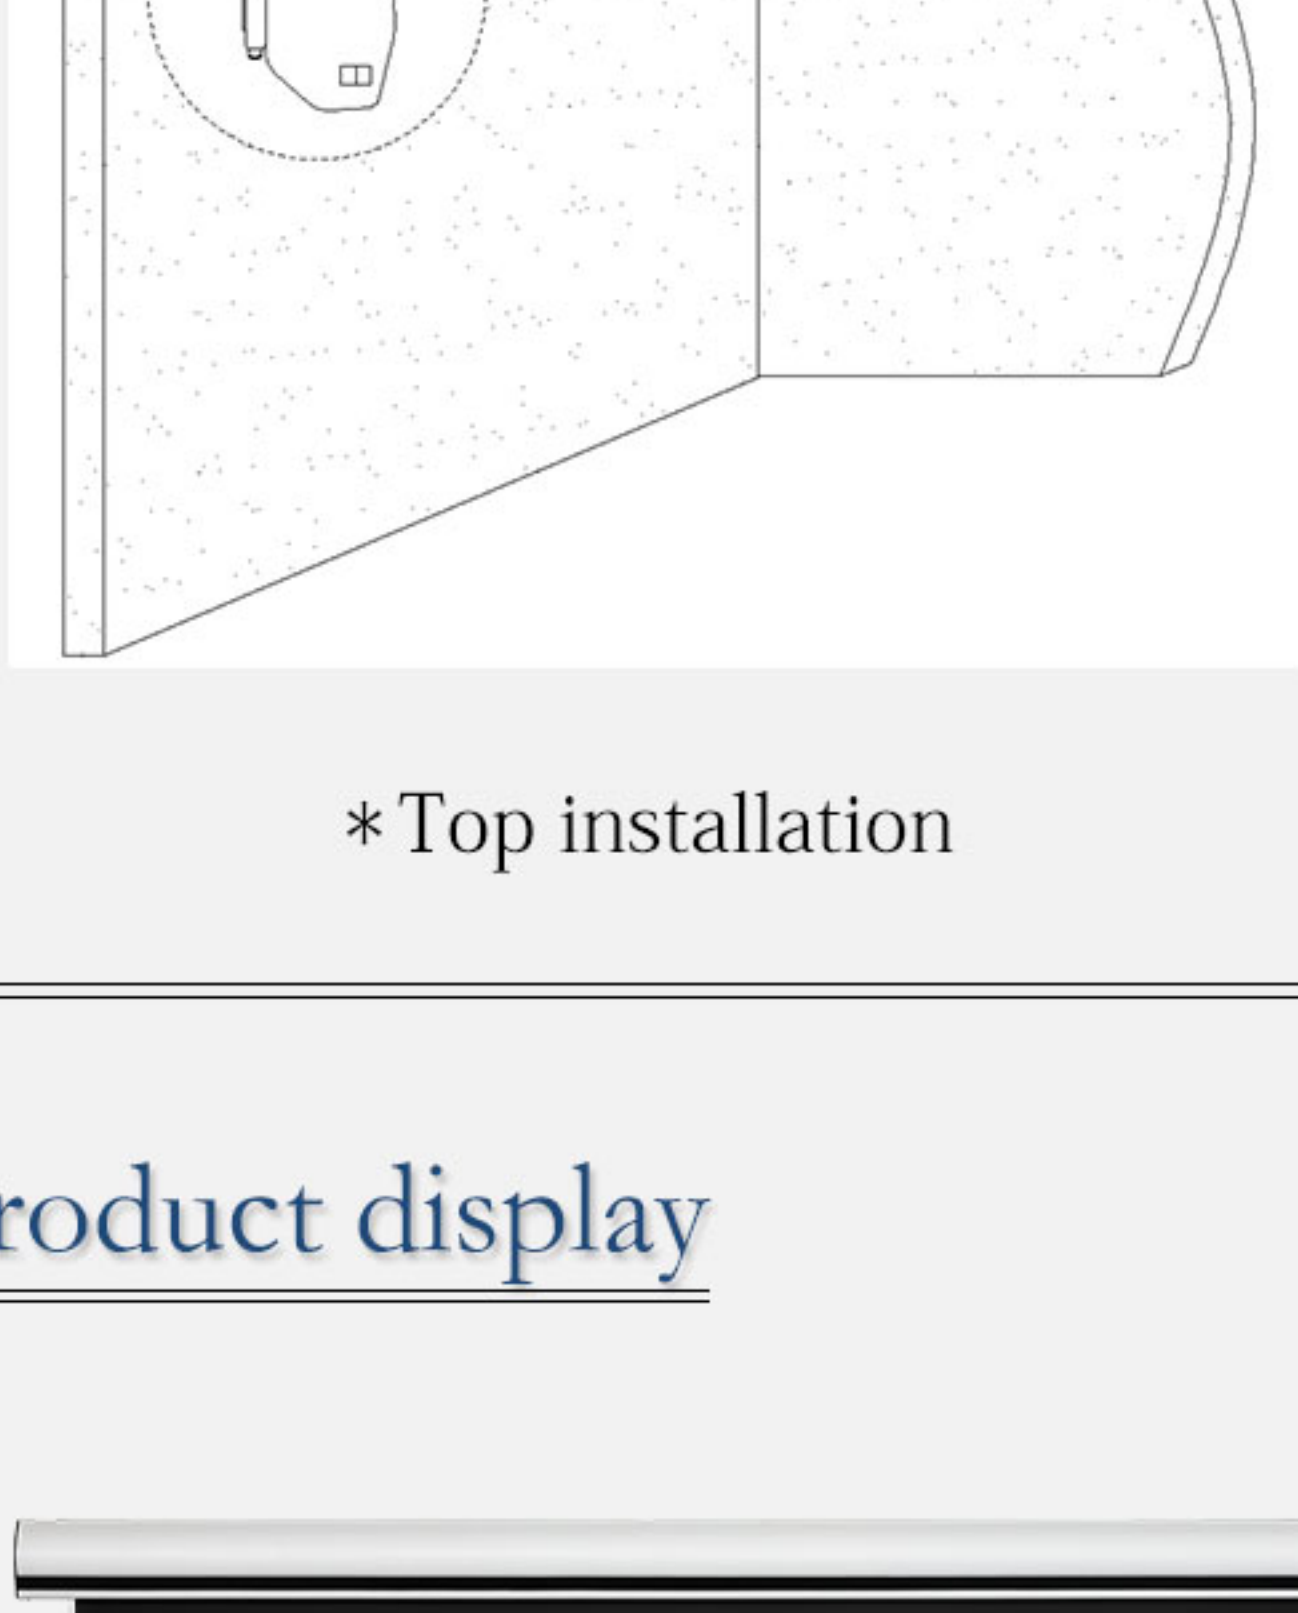


* Top installation

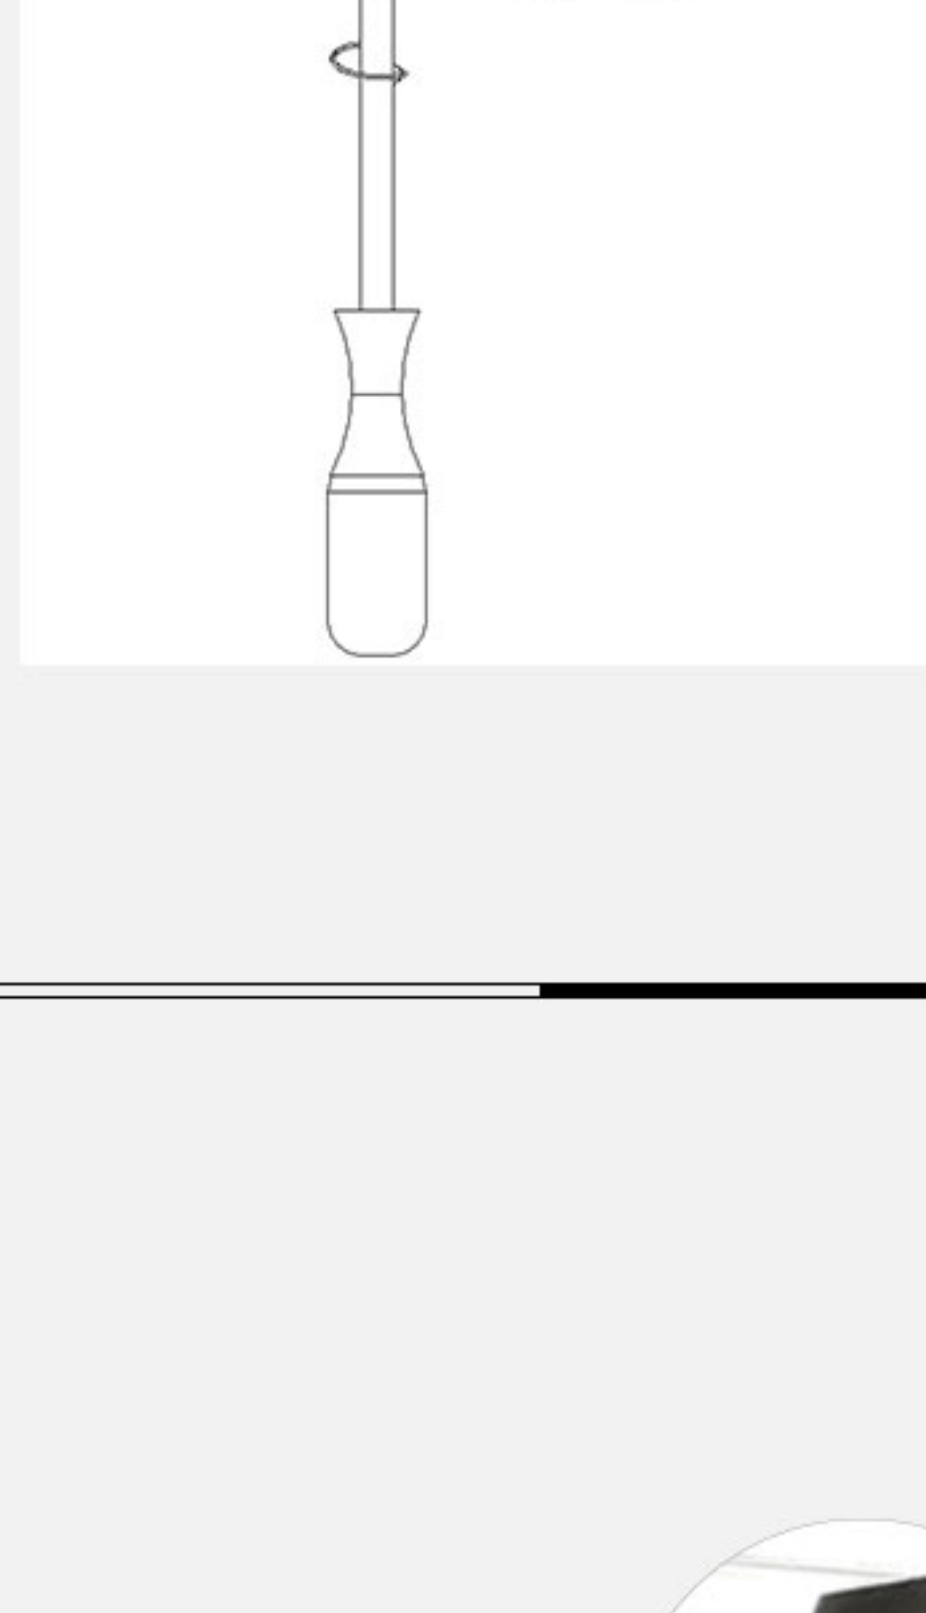

Product display

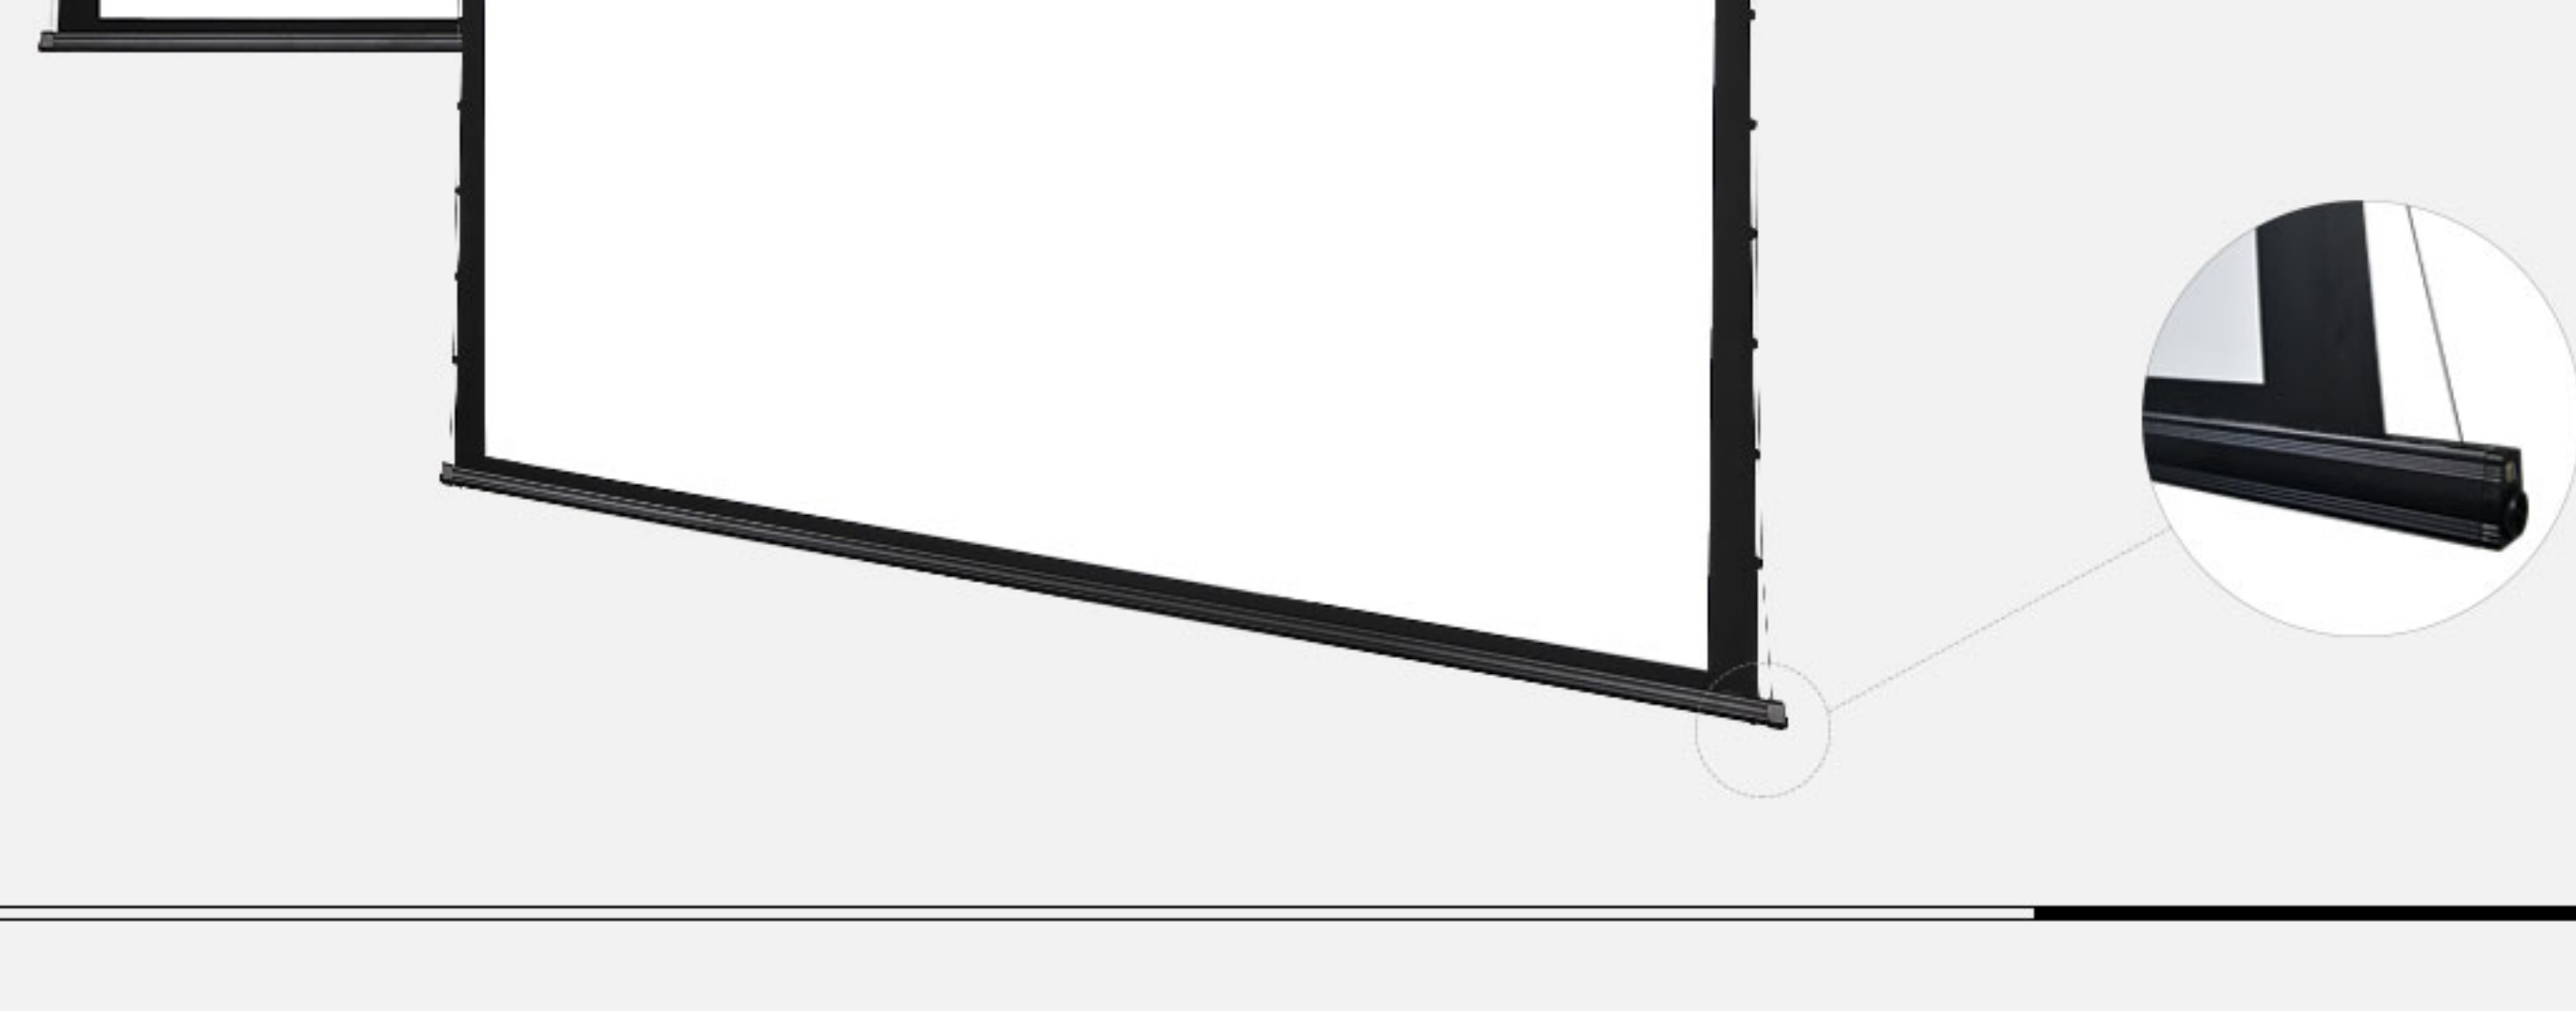

Product dimension

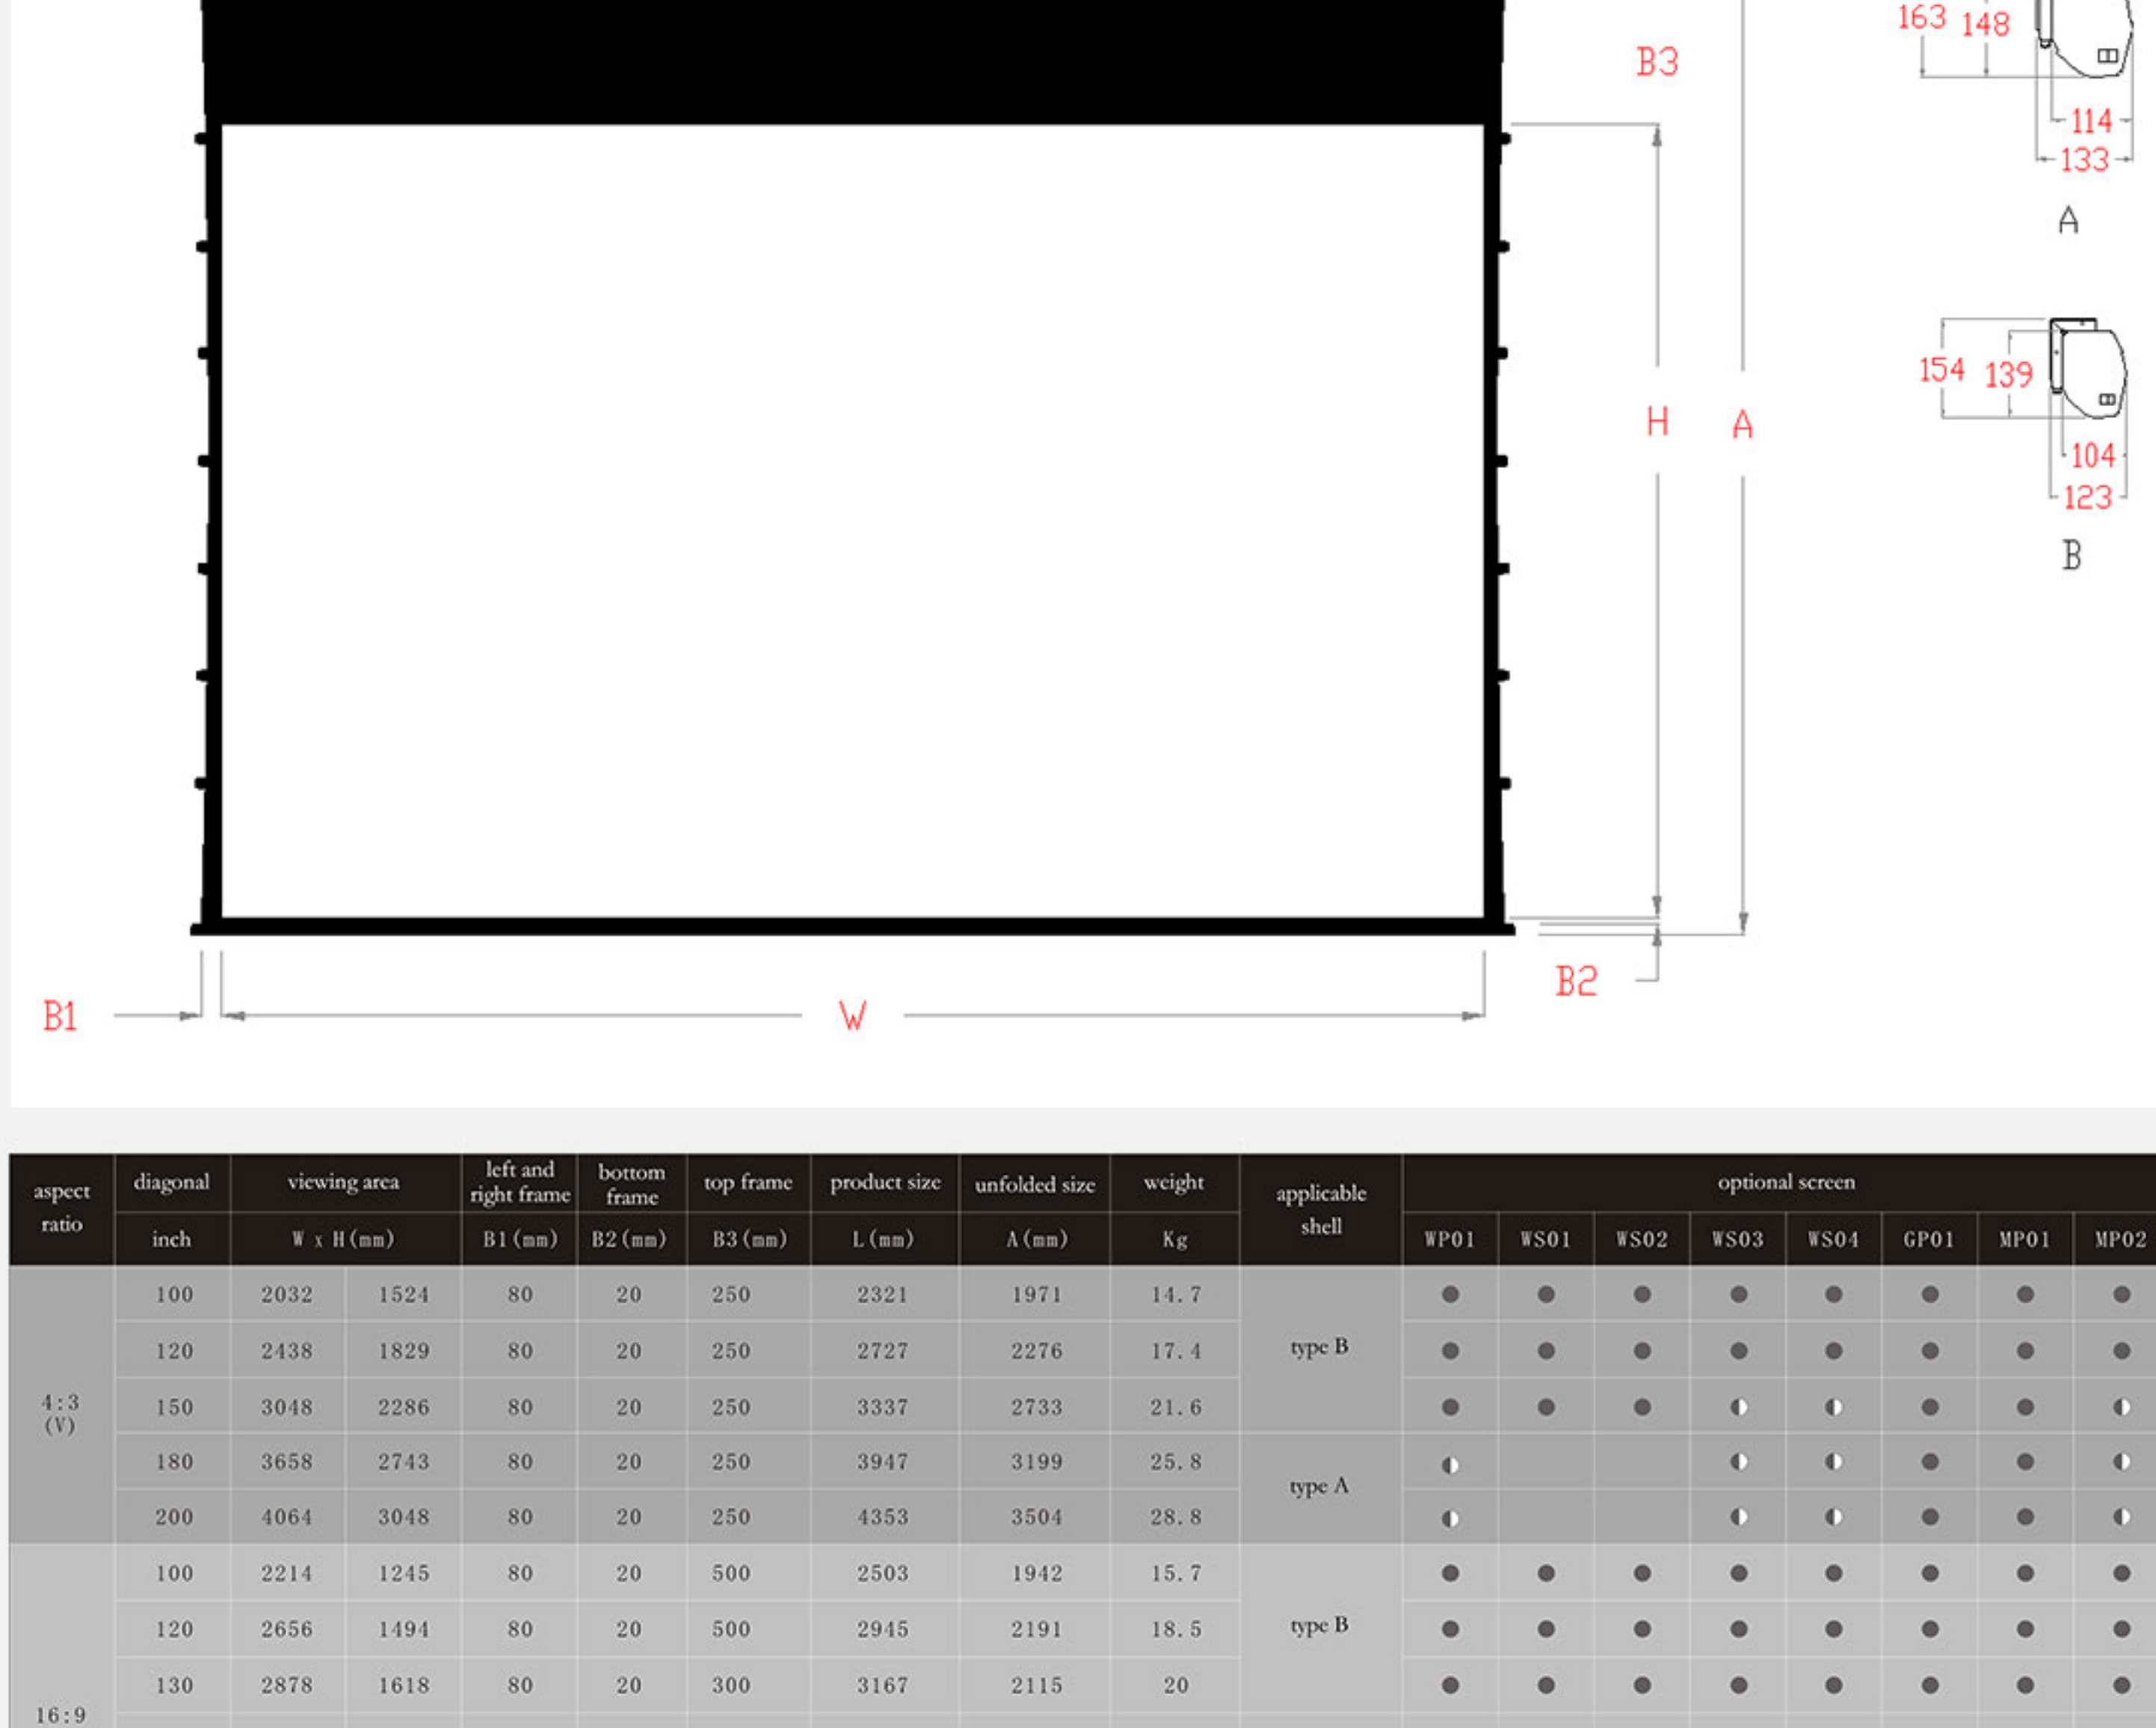

aspect ratio	diagonal inch	viewing area W × H (mm)	left and right frame B1 (mm)	bottom frame B2 (mm)	top frame B3 (mm)	product size L × W (mm)	unfolded size A (mm)	weight Kg	applicable shell	optional screen						
4:3 (V)	100	2032 × 1524	80	20	250	2321 × 1971	14.7		type B	FP01	FS01	FS02	FS03	FS04	GP01	FP01
	120	2438 × 1829	80	20	250	2727 × 2276	17.4									
	150	3048 × 2286	80	20	250	3337 × 2733	21.6									
	180	3658 × 2743	80	20	250	3947 × 3199	25.8		type A							
16:9 (H)	200	4064 × 3048	80	20	250	4353 × 3504	28.8									
	120	2214 × 1245	80	20	500	2503 × 1942	15.7		type B							
	130	2878 × 1618	80	20	300	3167 × 2115	20									
	150	3320 × 1867	80	20	300	3609 × 2364	21									
16:10 (F)	180	3984 × 2240	80	20	300	4273 × 2746	27.2		type A							
	200	4427 × 2489	80	20	300	4716 × 2995	30.3									
	120	2585 × 1615	80	20	300	2874 × 2121	18		type B							
	150	3231 × 2019	80	20	300	3520 × 2525	20.5									
16:9 (F)	180	3877 × 2423	80	20	300	4166 × 2929	25		type A							
	200	4308 × 2692	80	20	300	4597 × 3198	32									

⦿ For recessed installation, the clearing dimension should be >100mm, >100mm height, >60mm depth
⦿ You will not be informed if there is any change in design. Please contact us before ordering

⦿ screen match
⦿ screen without match