

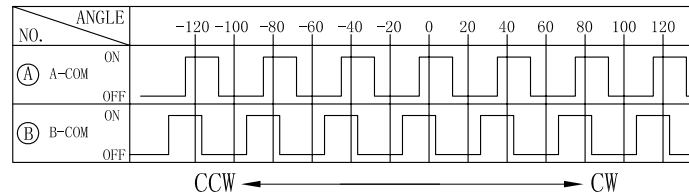
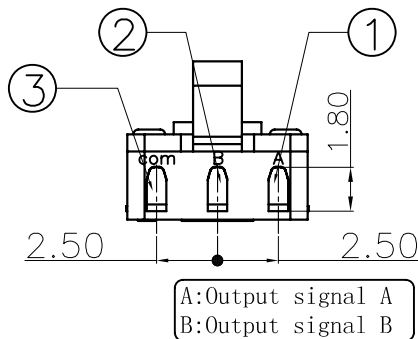
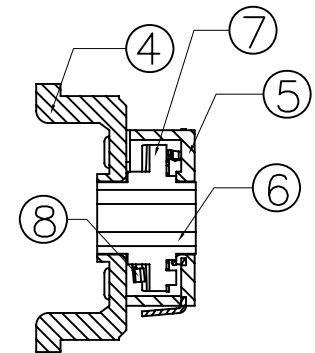
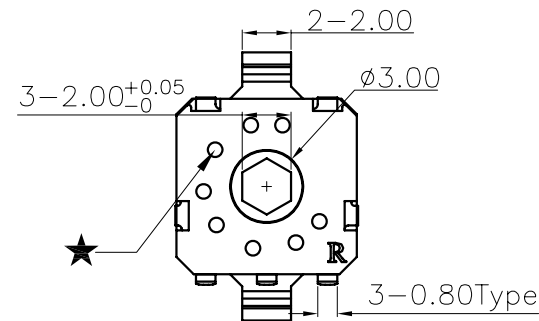
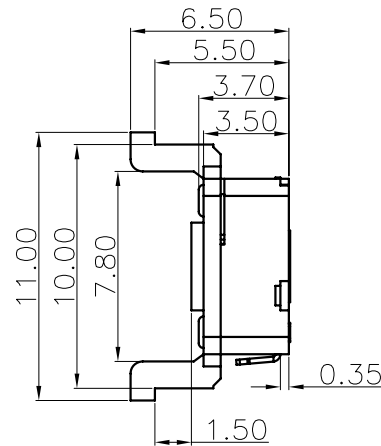


ABIDE BY WEEE & ROHS

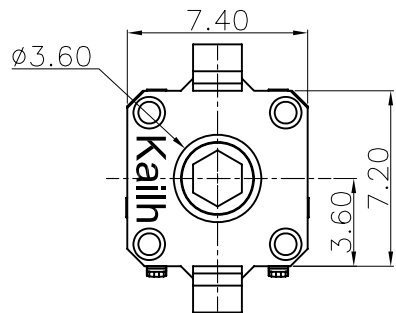


Numbers of detent: 18
Pulse/Rotation: 9 Pulse/360° (reverse)

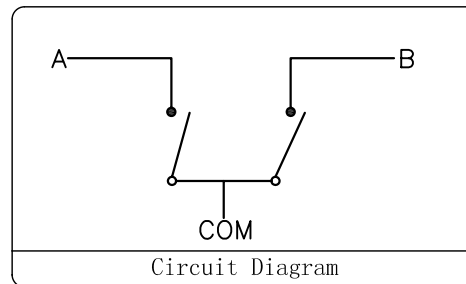

Shaft hole shape and dimension

Shaft hole position
will be at random



(Tolerance: ±0.1)
(P.C.B thickness t=1.6mm)

备注: 1. 底座背面的压针孔★是根据产品模具成型要求而定的, 其规格的大小与数量的多少对产品结构、功能及使用无任何影响;
2. 连接使用的线材为φ0.6mm外径的软线.

Specification :

- 1. Rated voltage: D.C. 5V
- 2. Maximum operating current(resistive load)
Each lead :1mA
- 3. Resolution: 9 pulses/360° for each phase
- 4. Contact Resistance: 10 Ω (Max)
- 5. Insulation resistance: 50MΩ (Min) DC50V
- 6. Dielectric strength: AC50V (50-60Hz) for 1 minute
- 7. Detent torque: 10-30gf.cm
- 8. Life Test :100,000 Cycles(min)

8	Fixed Plate	—	1	Stainless Steel	—	—
7	Revolving Wheel	—	1	POM	Black	UL 94HB
6	Contact	—	1	—	—	—
5	Base	—	1	PBT	Black	UL 94HB
4	Cover	—	1	PBT	Black	UL 94HB
3	Terminal	3	1	Brass(0.2t)	Plating Silver	—
2	Terminal	2	1	Brass(0.2t)	Plating Silver	—
1	Terminal	1	1	Brass(0.2t)	Plating Silver	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		 东莞市凯华电子有限公司 DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD			
DRAWN	Wanwenxue		Jul.28.2009					
CHECKED					TITLE:		Encoder (7.4*7.2*3.50)	
APPROVALS					PART NO.		EN723609W02	
TOLERANCES ARE	30<L	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:		
	10<L≤30	±0.20						
	5<L≤10	±0.15						
	L≤5	±0.10						
			±2°	DRAWING NO.			SHEET 1 OF 1	

ECN NO.	REV.	DATE.	APPRO.
	A		