



TAKFLY COMMUNICATIONS CO., LTD.

ADD: Takfly Industrial Park, Tongsheng Community, Dalang Street, Longhua District, Shenzhen, 518109, China.

Tel: +86-755-28106528

Fax: +86-755-23777278



ST-ST Patch cord



Duplex



Simplex

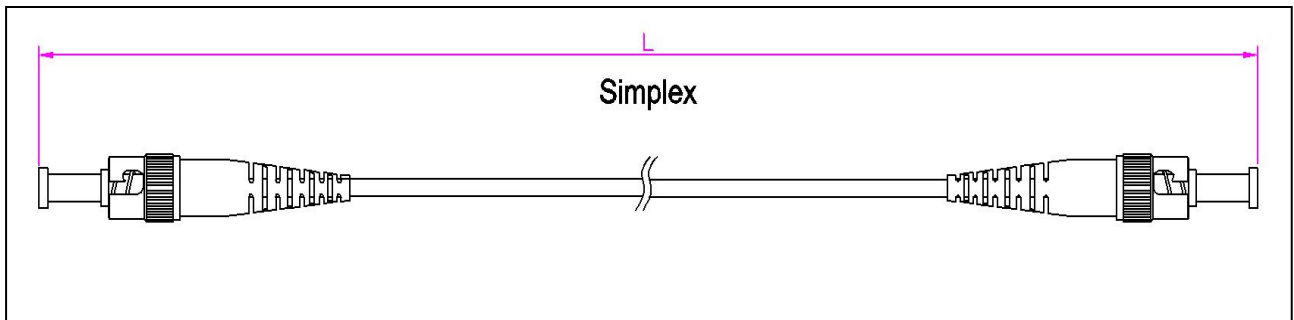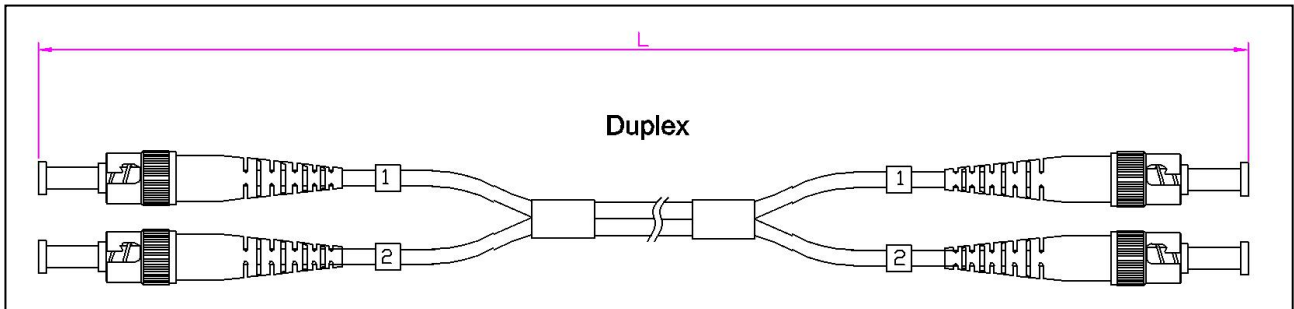

Applications:

- CATV
- Telecommunication networks
- Active device termination
- Local area networks(LANS)
- Data processing networks
- Test equipment
- Wide area networks(WANS)



TAKFLY COMMUNICATIONS CO., LTD.

ADD: Takfly Industrial Park, Tongsheng Community, Dalang Street, Longhua District, Shenzhen, 518109, China.

Tel: +86-755-28106528

Fax: +86-755-23777278

Features:

- Low insertion loss and High reflection loss
- Good exchange ability
- Good durability
- High temperature stability
- Standard: Telcordia GR-326-CORE

Specifications:

End face type	UPC and APC
Fiber type	SM (G652、G655、G657) ; MM (OM1-OM5)
Cable Diameter	2.0、3.0 or customized (Simplex/duplex)
Insertion loss	≤ 0.3dB
Return loss	UPC SM ≥ 50dB 、 APC SM ≥ 60dB 、 UPC MM ≥ 35dB
Repeatability	≤ 0.1
Durability	≤ 0.2dB
Interchangeability	≤ 0.2dB
Tensile strength	>70N
Operating Temperature	-20℃~70℃
Storage Temperature	-40℃~80℃
Outer Sheath Material	PVC、LSZH、TPU
Bending radius (Static/Dynamic)	10D/20D
Length	Customized