





TAKFLY COMMUNICATIONS CO., LTD.

ADD: Takfly Industrial Park, Tongsheng Community, Dalang Street, Longhua District, Shenzhen, 518109, China.


Tel: +86-755-28106528

Fax: +86-755-23777278

LC/UPC Male-Female Attenuation

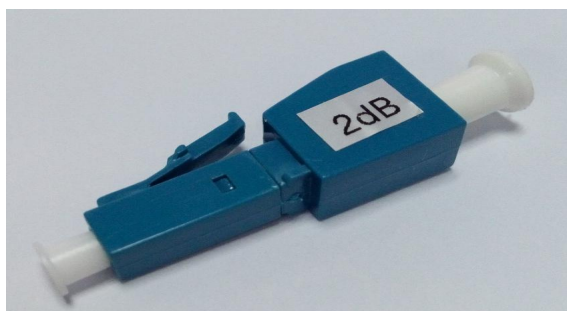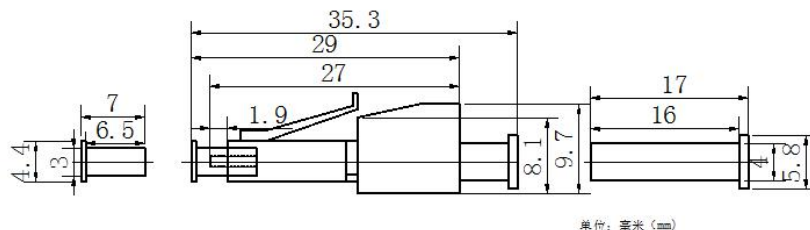

LC (M-F) UPC ATT (Type A)

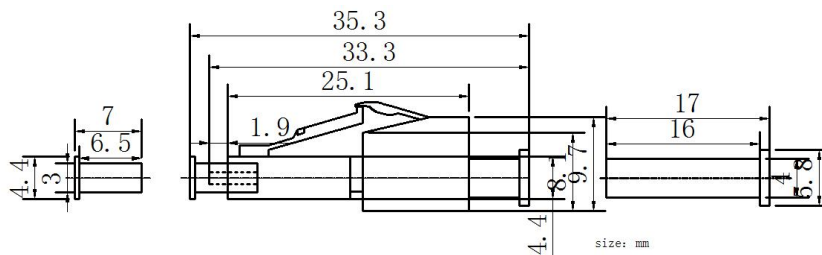

LC (M-F) UPC ATT (Type B)

Features

- Light Weight
- Small Volume
- Highly Precision
- Good stability

Applications

- Optical fiber communication system



TAKFLY COMMUNICATIONS CO., LTD.

ADD: Takfly Industrial Park, Tongsheng Community, Dalang Street, Longhua District, Shenzhen, 518109, China.

Tel: +86-755-28106528

Fax: +86-755-23777278

- Optical fiber test equipment
- Optical CATV
- Large probability optical device measurement

Technical Specification

Type	Parameter	UPC	APC	MM
Insertion Loss	SM:1310nm/1550nm MM:850nm/1300nm	≤0. 2dB	≤0. 2dB	≤0. 3dB
Return Loss	SM:1310nm/1550nm MM:850nm/1300nm	≥55 dB	≥60 dB	≥35 dB
Duration	>1000	<0. 1 dB		
Tensile strength	>100N	<0. 1 dB		
Operating Temperature(℃)	-40~+85			
Storage Temperature(℃)	-40~+85			
Tolerance	DB value≤5 dB =±0.5&DB value≥5 dB =±DB*10%			