
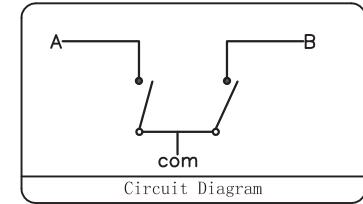
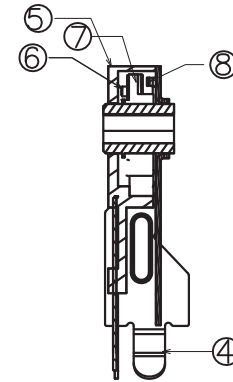


ABIDE BY ROHS


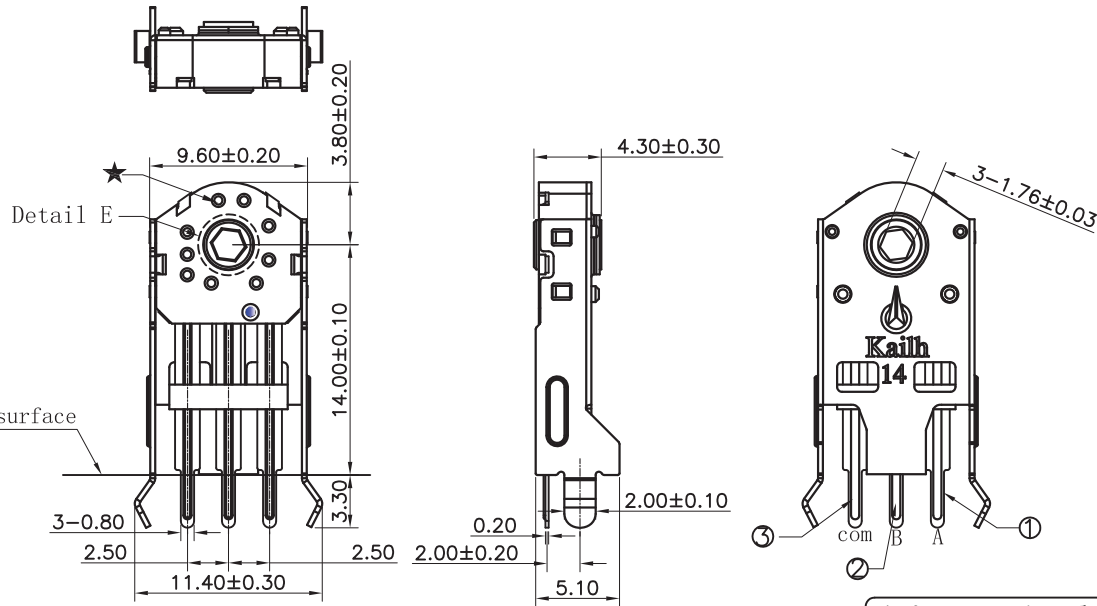


Specification :

- 1. Rated voltage: DC 5V
- 2. Maximum operating current(resistive load) Each load :1mA
- 3. Resolution: 12 pulses/360° for each phase
- 4. Contact Resistance: 5Ω(Max)
- 5. Insulation resistance: 50MΩ(Min) DC50V
- 6. Dielectric strength: AC50V(50-60Hz)for 1 minute
- 7. Detent torque: 10-25gf.cm
- 8. Life Test :300,000 Cycles(min)

Detail E(2:1)

Shaft hole shape and dimension

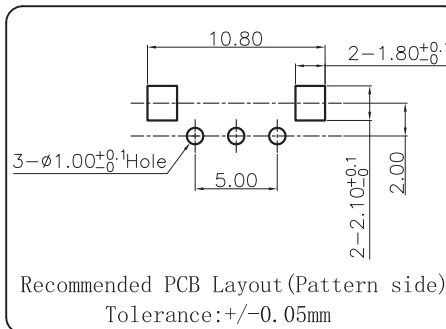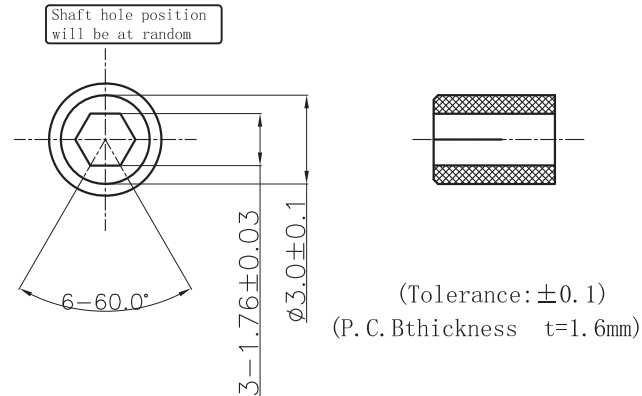

备注：底座背面的压针孔★是根据产品模具成型要求而定的，其规格的大小与数量的多少对产品结构、功能及使用无任何影响。

⑧	Fixed Plate	—	1	Stainless Steel	—	—
⑦	Revolving Wheel	—	1	POM	Gray	UL 94HB
⑥	Contact	—	1	Copper Alloy	—	—
⑤	Base	—	1	PA66	Black	UL 94HB
④	Shell	—	1	SPCC	Plating Nickel	—
③	Terminal	3	1	Copper Alloy	Plating Silver	—
②	Terminal	2	1	Copper Alloy	Plating Silver	—
①	Terminal	1	1	Copper Alloy	Plating Silver	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		 东莞市凯华电子有限公司 DONGGUAN CITY KAIHUA ELECTRONICS CO.,LTD			
DRAWN		WUYU	2020. 06. 22					
CHECKED					TITLE:		EN9814 B Type Encoder	
APPROVALS					PART NO.		CEN981412R05	
TOLERANCES ARE	30<L	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:		
	10<L≤30	±0.20						
	5<L≤10	±0.15						
	L≤5	±0.10						
			±2°	DRAWING NO.		SHEET 1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			