
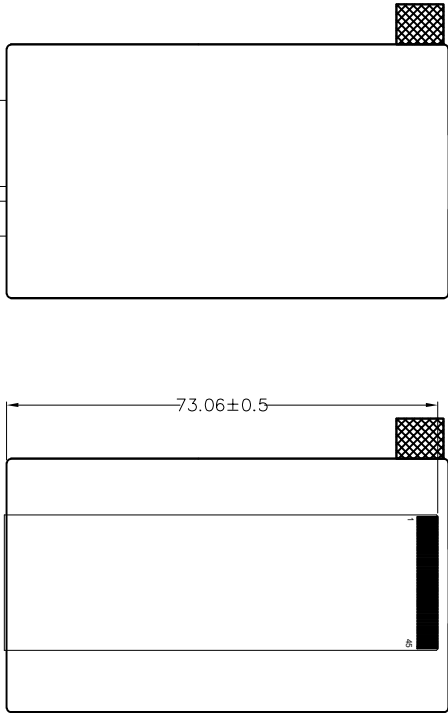


Customer Approve By


REV	DESCRIPTION	MODIFY BY	DATE
A0	1 st ST DESIGN	LZZ	2022.02.26

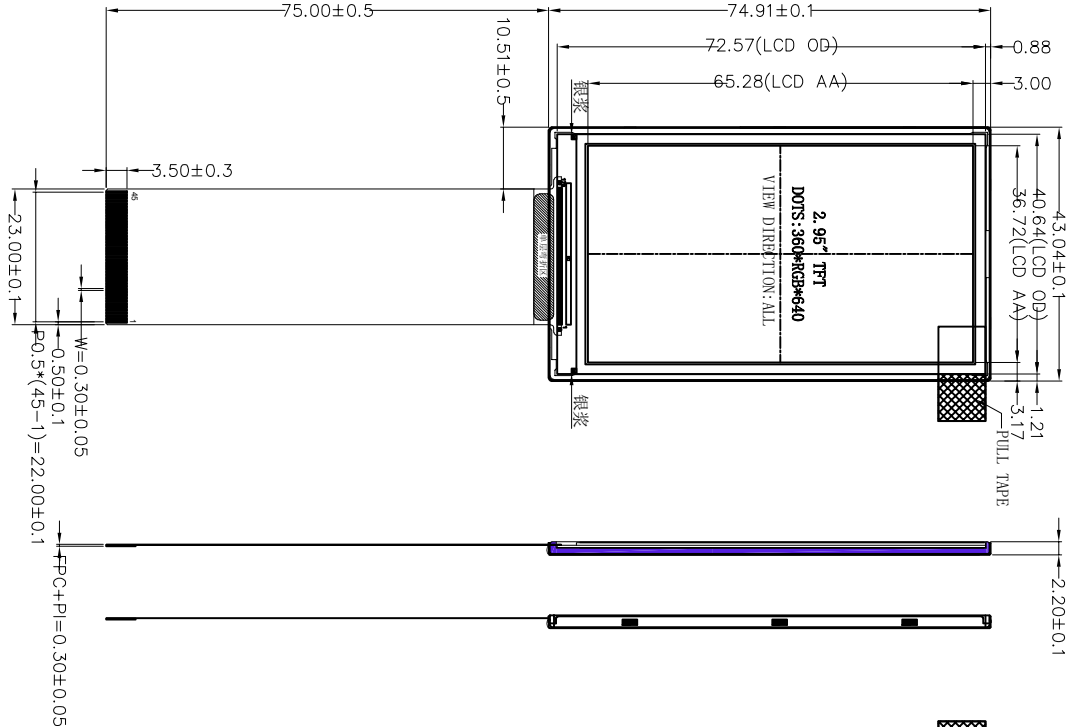

FPC 弯折示意图

PIN	SYMBOL
1	IMO
2	IM1
3	IM2
4	RESET
5	VSYN
6	HSYN
7	PCLK
8	DE
9-26	DB17-DB0
27	SDO
28	DIN(SDA)
29	RD
30	WR(SCL)
31	RS
32	CS
33	VCC
34	VCC
35	GND
36	GND
37	LEDK4
38	LEDK3
39	LEDK2
40	LEDK1
41	LEDA
42	XR NC
43	YD NC
44	XL NC
45	YU NC

FPC 展开出货

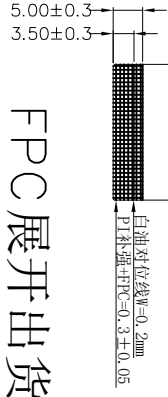

Note: RoHS

1. Display Module:
2. Driving Condition:
3. Viewing Direction:
4. Operating Temp:
5. LCD:
6. IC:
7. Backlight:
8. Unspecified tolerance is $\pm 0.20mm$
9. ROHS Request

3.0" TFT/IPS
VDD=2.8V

ALL


-20~+70°C
-30~+80°C

IPS片 上细砂下增亮片0.13

ST7701S

WHITE LED*4 LCM 亮度200—250cd/m2

NOTE:
VF=3.2V IF=80mA/LED



深圳金视界光电科技有限公司
SHENZHEN GOLDEN VISION OPTOELECTRONIC CO., LIMITED

SCALE: 1/1	UNIT: .mm	DATE	PAGE: 1/1	APPROVE	CHECK	DESIGNER
MODEL NO.:	GVH0300WV05H					
PART NO.:						