


Terminal Blocks, PP & Brass Type

- Polypropylene (PP), UL 94V-2 flame-retardant housing rated at T85 (IEC), 105°C (UL).
- Metal parts feature steel screws and nickel-plated brass contacts.
- Recessed screws and tubular contacts provide added safety and help prevent short circuits.
- Accepts a wider range of conductor sizes than old brass type.
- Modular 12-circuit design can be cut into desired number of poles (can be pre-cut upon request).
- Certified to IEC/EN 60998 and Recognized to UL 1059.

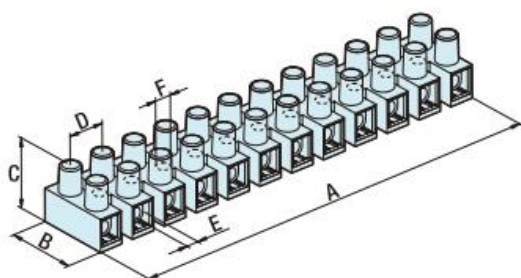

Cat. No.	Dimensions (mm/inches)							Screw
	Unit	A	B	C	D	ØE	ØF	
PA8PS	mm	96.20	16.30	14.50	8.20	2.80	2.90	M2.6x5
	in.	3.787	0.642	0.571	0.323	0.110	0.114	
PA10PS	mm	116.2	20.10	16.70	10.00	3.40	3.90	M3x6
	in.	4.575	0.791	0.657	0.394	0.134	0.154	
PA12PS	mm	139.6	23.40	18.60	12.00	4.20	3.80	M3.5x7
	in.	5.496	0.921	0.732	0.472	0.165	0.150	

Cat. No.	Color	No. of Poles	Electrical Ratings & Wire Range (Cu)	Approvals	Packing
PA8PS	White / Black	12	32A, 450V, T85°C 0.75-4 mm², Rigid/Flex	CE FI cec	Carton of 500 (10 bags, 50 ea.)
			20A, 300V, 105°C (221°F) 22-12 AWG, Sol/Str	c US	
PA10PS	White / Black	12	41A, 450V, T85°C 1-6 mm², Rigid/Flexible	CE FI cec	Carton of 500 (10 bags, 50 ea.)
			30A, 300V, 105°C (221°F) 22-10 AWG, Sol/Str	c US	
PA12PS	White / Black	12	57A, 500V, T85°C 2.5-10 mm², Rigid/Flex	CE FI cec	Carton of 400 (10 bags, 40 ea.)
			35A, 300V, 105°C (221°F) 22-10 AWG, Sol/Str	c US	