



## 0711-1RS Series

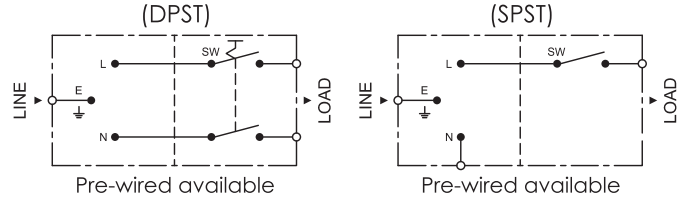

Specification	Inlet	Rocker Switch
<b>Power Rating</b>	10 A 250 V AC	10 A 250 V AC
<b>Electric Strength</b>	AC 2,000 V for 1 Minute	AC 1,500 V for 1 Minute
<b>Contact Resistance</b>	30 mΩ Max.	20 mΩ Max.
<b>Insulation Resistance</b>	100 MΩ Min. at 500 VDC	100 MΩ Min. at 500 VDC
<b>Operating Temperature</b>	+70°C	+ 100°C (SPST) + 105°C (DPST)
<b>Materials</b>	Thermoplastic UL Flammability 94V-0 & Copper Alloy	Thermoplastic UL Flammability 94V-2 & Copper Alloy
<b>Terminal</b>	Q : Q.D / Solder Tab, 4.8 X 0.8 S : Solder Tab, 2.5 X 0.8	Q.D / Solder Tab, 4.8 X 0.8 Solder Tab, 3.5 X 0.8
<b>Panel Thickness</b>	Snap-in Panel Thickness : 0.8 / 1.0 / 1.2 / 1.5	Single Pole (On / Off Switch) Double Pole (On /Off Switch )

Unit : mm

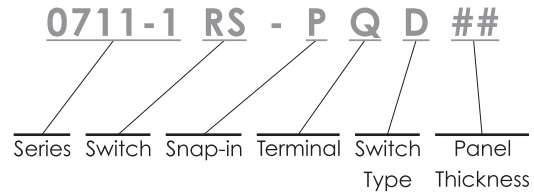