

MR6 SERIES

DOUBLE POLE ROCKER SWITCHES UP TO 20A 125VAC

Soldering, quick connecting terminals





Snap-in Panel Cutout
X=Panel Thickness

X	Dim.Y	Dim.Z
0.75 to 1.25mm	19.2 + 0 / -0.1	12.9 + 0.15 / - 0
1.25 to 2 mm	19.4 + 0 / -0.1	12.9 + 0.15 / - 0
2 to 3 mm	19.8 + 0 / -0.1	12.9 + 0.15 / - 0



- 20A 125VAC, (UL, CUL)
- 16A 125/250VAC (UL,CUL)
- 12A 125/250VAC (UL,CUL)
- TV-10
- Initial contact resistance : 20m ohm (max.)
- Insulation resistance : 100M ohm (min,) at 500VDC
- Dielectric strength : 1,000VAC for 1 minute
- Base : Nylon 66, UL rated 94V-2 min
- Actuator : Nylon 66, UL rated 94V-2 min
- Spring : Steel wire
- Contact : Silver plated copper alloy
- Terminals: Silver plated Copper

How to order

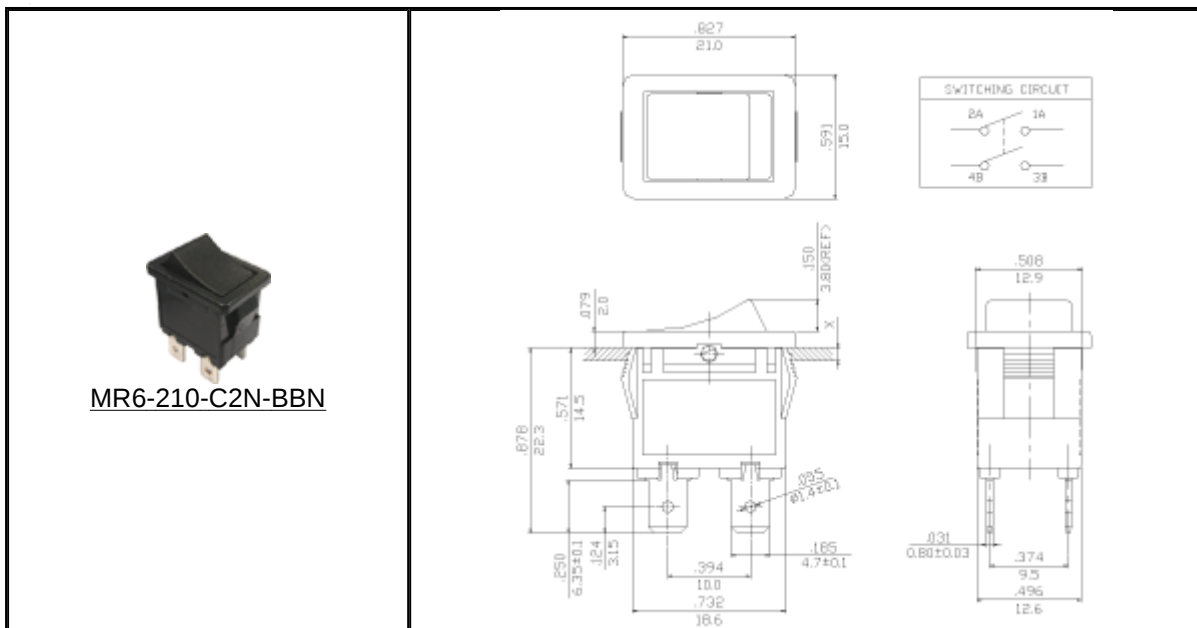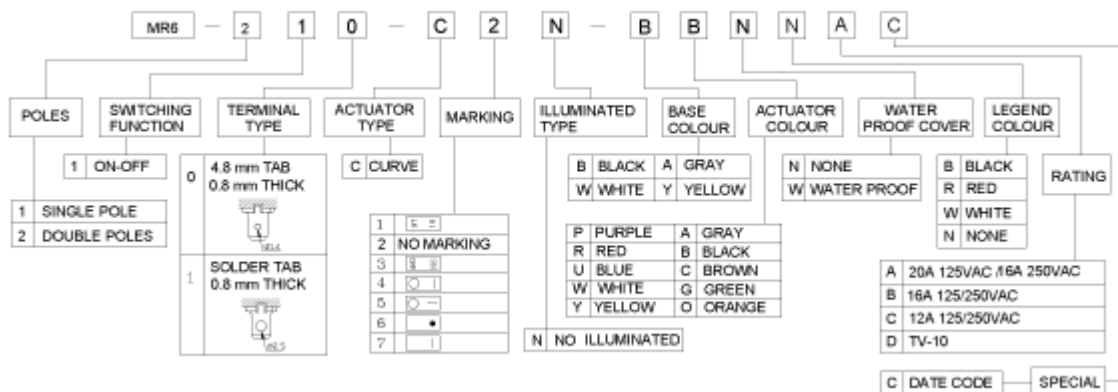

MR6-210-C2N-BBN