



CN1:LCM Interface		CN2:Backlight Interface	
Pin NO.	Pin Name	Pin NO.	Pin Name
1	VSS	1	LED(+)
2	VCC	2	VCC
3	SDA	ON:Connect CN2-1,CN2-2	
4	SCL	OFF:Disconnect CN2-1,CN2-2	
Interface		IIC	

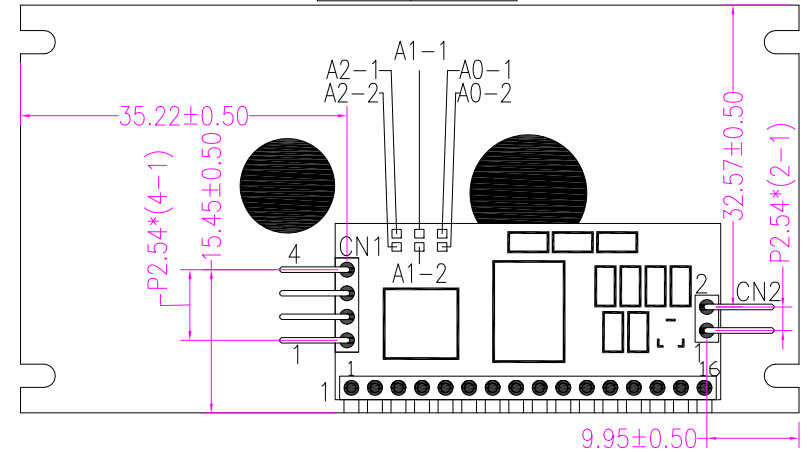

DETAIL DOTS



INPUTS			ADDRESS
A2-1,A2-2	A1-1,A1-2	A0-1,A0-2	
Connect	Connect	Connect	0x20
Connect	Connect	Disconnect	0x21
Connect	Disconnect	Connect	0x22
Connect	Disconnect	Disconnect	0x23
Disconnect	Connect	Connect	0x24
Disconnect	Connect	Disconnect	0x25
Disconnect	Disconnect	Connect	0x26
Disconnect	Disconnect	Disconnect	0x27


SPECIFICATIONS:

- 1.DISPLAY TYPE:YELLOW-GREEN/STN
- 2.VIEWING DIRECTION:6:00 O'CLOCK
- 3.POLARIZER MODE:TRANSFLECTIVE/POSITIVE
- 4.DRIVE METHOD:1/16 DUTY,1/5 BIAS
- 5.OPERATING TEMP:-20°C---+70°C
- 6.STORAGE TEMP:-30°C---+80°C
- 7.WORKING VOLTAGE:VDD-VSS=+5.0VDC
- 8.BACKLIGHT:YELLOW-GREEN
- 9.ALL UNMARKED TOLERANCES:±0.20mm/±0.5°

版本 Ver.	标记 Mark	更改内容 Modify the content	更改人 Modified by	日期 Date	版本 Ver.	标记 Mark	更改内容 Modify the content	更改人 Modified by	日期 Date
					V1		First issue	李建清	20240806

 **深圳市佳显电子技术有限公司**
ShenZhen Goodview Electronic Technology Co.,Ltd

绘图: 李建清	绘图编号: LCM-SJXD1602C-1-ZDYSYWN
审核:	客户编号:
批准:	图纸版本号: V1

 单位: mm
日期: 2024-08-06
页数: 1/1