


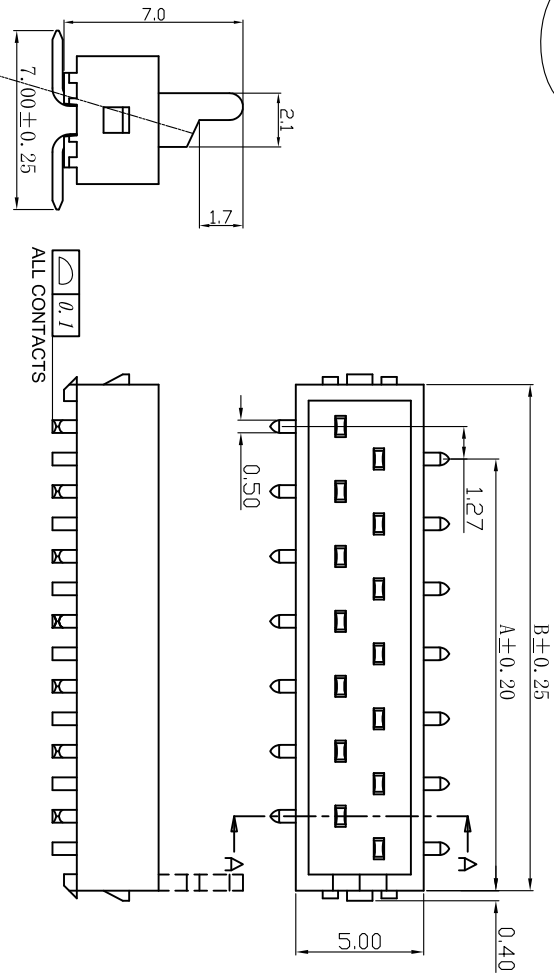
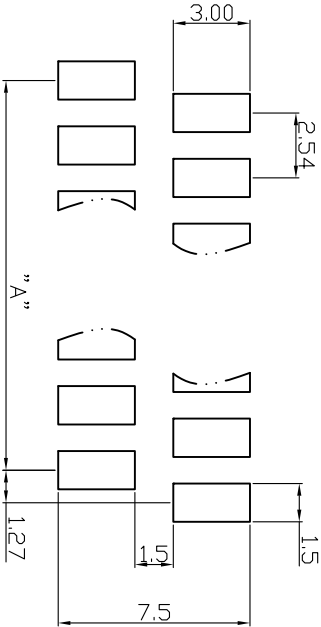


RoHS



SECTION A-A

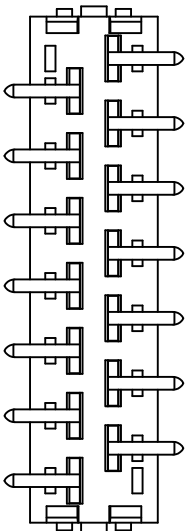


Recommended P.C. Board Layout

MATERIAL&FINISH
Insulator: PA6T UL 94V-0
Contact : Phosphor bronze
Contact : Sn Over Ni.

ELECTRICAL CHARACTERISTICS:
Current Rating: 1 Amp
Contact Resistance: 20mΩ Max
Withstanding Voltage: 500V AC/Min
Insulation Resistance: 1000MΩ Min
Temperature Range: -40° To+105°

1321-XXM1BXPSS0 XX0

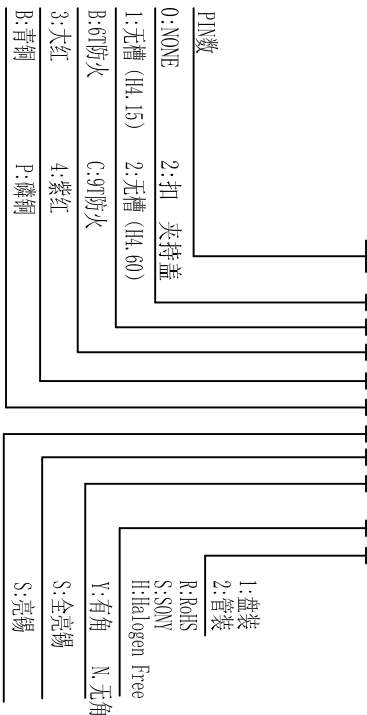

NUMBER OF POSITIONS		Q'ty		NUMBER OF POSITIONS		Q'ty		NUMBER OF POSITIONS		Q'ty	
DIM. A	DIM. B	/Tube		DIM. A	DIM. B	/Tube		DIM. A	DIM. B	/Tube	
04	2.54	7.09	68	12	12.7	17.25	31	20	22.86	27.41	20
06	5.08	9.63	52	14	15.24	19.79	27	22	25.40	29.95	18
08	7.62	12.17	42	16	17.78	22.33	24	24	27.94	32.49	17
10	10.16	14.71	36	18	20.32	24.87	22	26	30.48	35.03	16
UNLESS TOLERANCE				DRAW BY	杨国祥						
GENERAL		ANGLE		DESIGN BY	袁刚						
X. ± 0.38		X'. ± 3.0°		CHECK BY			ITEM : 1321SERIES				
.X. ± 0.38		.X'. ± 2.0°					1.27mm, 5.08mm, 12.17mm, 17.78mm, 22.33mm, 27.41mm, 29.95mm, 32.49mm, 35.03mm				
.XXX ± 0.25		.XX' ± 1.0°		APPROVE BY							
.XXX ± 0.10		.XXX' ± 0.5°									
SCALE				SHEET	UNIT		FILE NO		1321-01		
1:1				1/1	MM		DRAW NO		1321-XXM1BXPSS0 XX0		
											
											
东莞市远哲电子科技有限公司											
Dongguan City Yuzhe Electronics Technology Co., Ltd.											

东莞市远哲电子科技有限公司
Dongguan City Yuanzhe Electronic Technology Co., Ltd.