
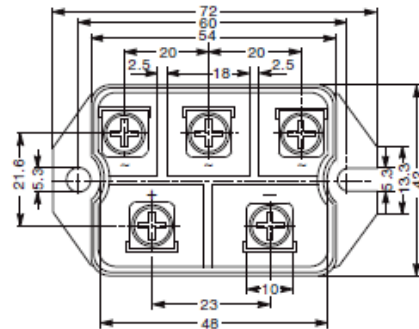
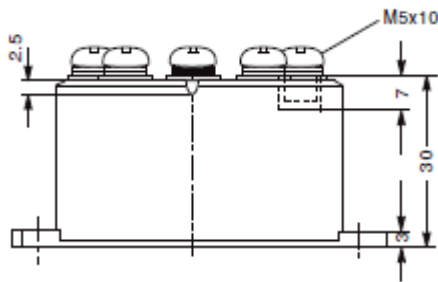


Three Phase Rectifier Bridge

$$I_{dAV} = 60 \text{ A}$$

$$V_{RRM} = 1000\text{-}2400\text{V}$$

V_{RRM} (V)	V_{RSM} (V)	TYPE
1000	1100	MDS60-10
1200	1300	MDS60-12
1600	1700	MDS60-16
1800	1900	MDS60-18
2200	2300	MDS60-22
2400	2500	MDS60-24

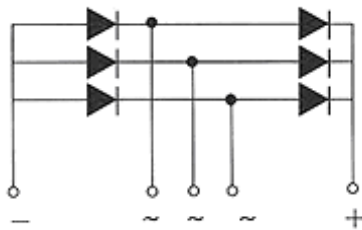

Maximum Ratings

Symbol	Item		Conditions	Ratings	Unit
I_D	Output current (D.C.)		Three phase. full wave. $T_c=117^\circ\text{C}$	60	A
I_{FSM}	Surge Forward Current		1 cycle, 50/60Hz, peak value, non-repetitive	910/1000	A
T_j	Junction Temperature			-40 to +150	$^\circ\text{C}$
T_{stg}	Storage Temperature			-40 to +125	$^\circ\text{C}$
V_{iso}	Isolation Breakdown Voltage (R.M.S.)		Main Terminal to case 1minute	2500	V
M_d	Mounting	Mounting(M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)	$\text{N}\cdot\text{m}(\text{kgf}\cdot\text{cm})$



YANGZHOU POSITIONING TECH. CO., LTD

	torque	Terminal(M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	
--	--------	--------------	-----------------------------------	----------	--

Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I _{RRM}	Repetitive Peak Reverse Current, max.	T _j =150 °C at V _{RRM}	4.0	mA
V _{FM}	Forward Voltage Drop, max.	I _{FM} =60A, T _j =25 °C Inst. measurement	1.3	V
R _{th(j-c)}	Thermal Impedance, max.	Junction to case	0.24	°C/W



Tel: +86-514-87782298, 87782296 FAX: +86-514-87782297, 87367519
E-mail : positioning@china.com; yzforever@vip.tom.com; yzpst@pst888.com
WEB SITE: <http://www.pst888.com> www.yzpst.cc

