



Empty Housing



Luxe Housing



c/w Adaptor

Luxe 7-1



DECORATIVE




5471-7


Key advantages

- Tool free access for maintenance Low light pollution
- Elegant and comfortable solution for creating ambiance
- Traditional look combined with cutting edge technology
- Protector in transparent Tempered glass.
- IP 66 tightness level for long lasting
- Several light distributions
- Symmetrical light distribution for general area lighting or asymmetrical light distribution for lighting roads and streets
- Surge protection 10kV

Dimensions | Mounting

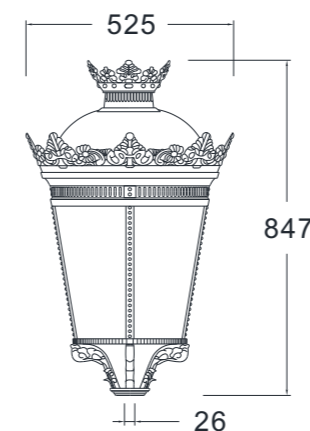

Columns and brackets

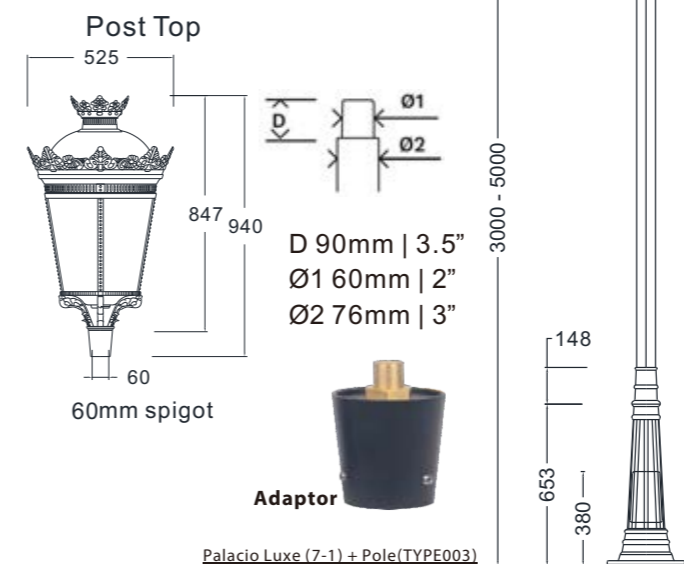

Characteristics

5471-7	
Recommended installation height	3m to 5m / 10' to 16'
Typical luminaire Output flux (range)	2,532 to 13,486lm
Power consumption	20W to 120W
LED Brand	Cree XPG3
Driver Brand	Philips/Osram/MW
Colour temperature	3/4/5000K
Nominal voltage	220-240V / 120-277V
	50-60Hz
Surge protection	10KV