
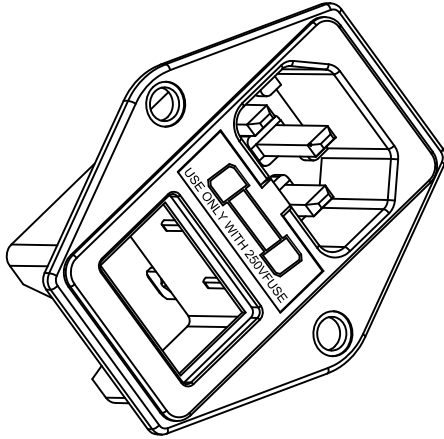


惠州宏利源电器有限公司




HONYONE ELECTRICAL APPLIANCE CO.,LTD

S-03F

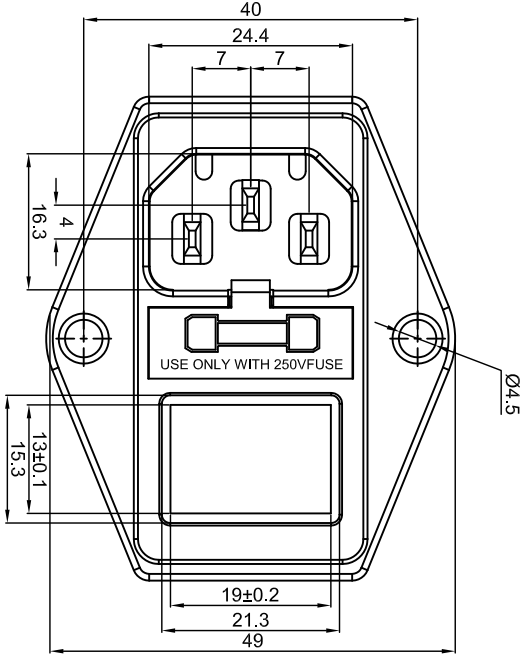

Rating: 10 A 250VAC(UL CUL)
6.3A 250VAC(VDE)
10 A 250VAC(CCC)

Insulation Resistance:DC 500V 100MΩ Min
Dielectric Strength:AC 2000V1minute
Fuse:Ø5.0x20mm 
Welding method:Manual Soldering
(350 ° C±5 ° C,3s±0.5s)

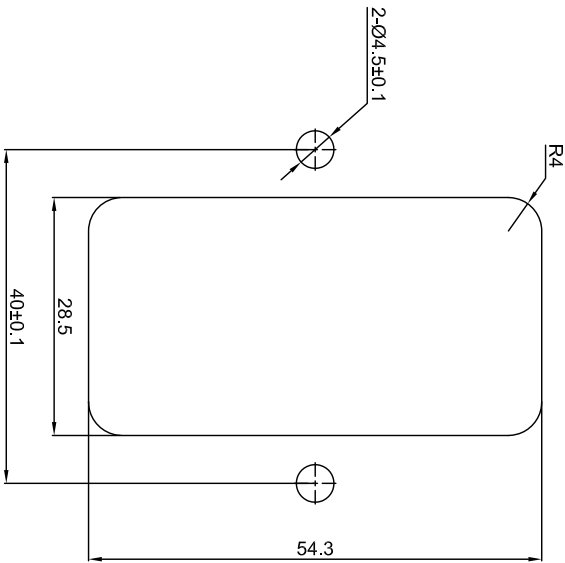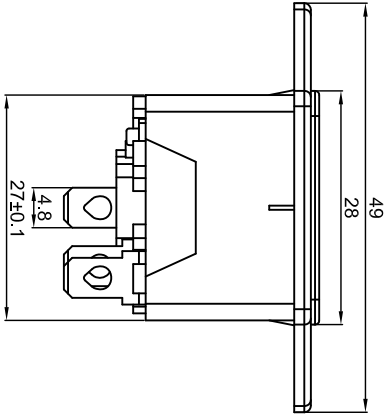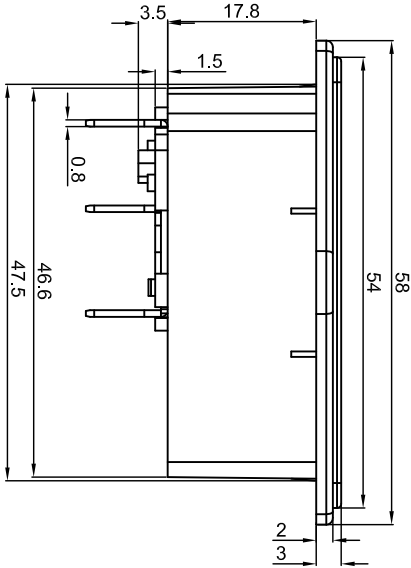

公差 TOLERANCES		.X± 0.3		.XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT		mm.	
视角 VIEWING ANGLE		比例尺 SCALE		NONE		日期 DATE		品名 TITLE		图号 DRAWING NO	
A1	重新整理	2012.12.11	N/A			2016.12.11		S-03F-11S			
A0	New Issue	2011.12.01	N/A					S-03F-11S		S-03F-11S_CP_A1	
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	核对 CHECKED BY	绘图 DRAWN BY	P.W.Rao				